
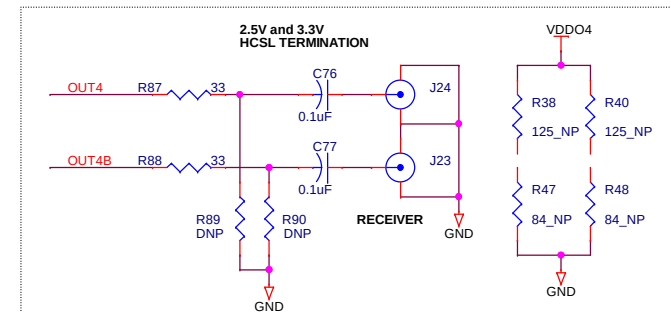
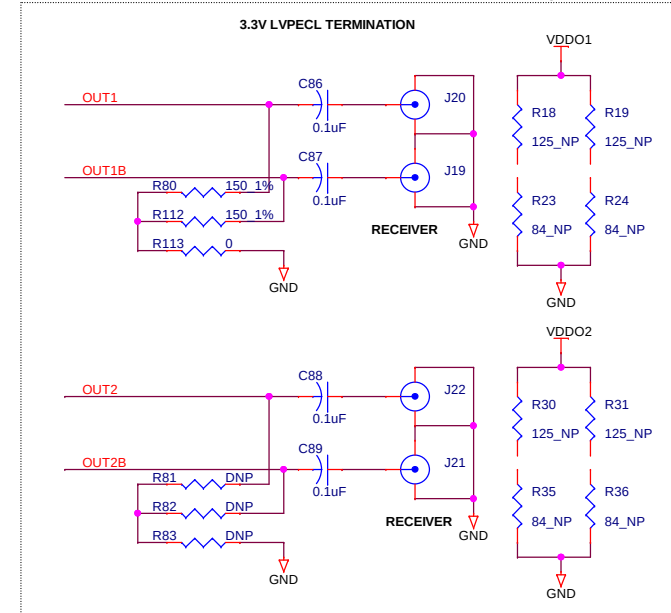
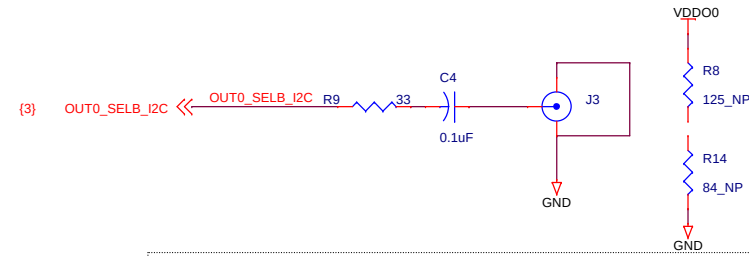


IDT 5P49V5907 EVM BOARD
REV : 1

- PAGE 01 : TITLE_PAGE**
PAGE 02 : 5P49V5907 CONNECTION
PAGE 03 : VC5
PAGE 04 : POWER CONNECTION
PAGE 05 : I2CMODULE





Title		
IDT_5P49V5907_EVM_BOARD_REV1		
Size	Document Number	Rev
B	305-PD-15-0204	1
Date:	Friday, May 22, 2015	Sheet 1 of 5

5P49V5907 CONNECTIONS

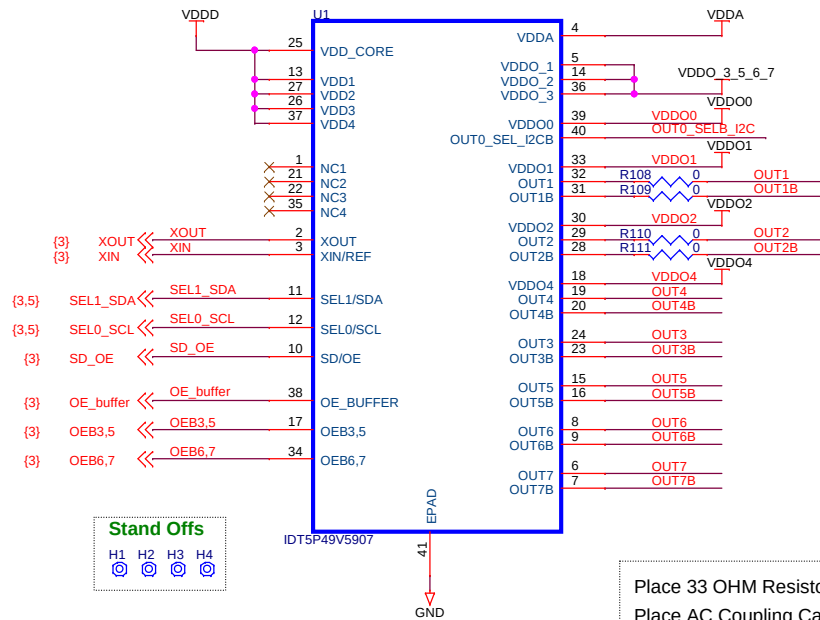


Place 33 OHM Resistors
Closed to Main Device
R89 & R90 Should
Closer to the SMA


Title		
IDT_5P49V5907_EVM_BOARD_REV1		
Size	Document Number	Rev
B	305-PD-15-0204	1
Date:	Friday, May 22, 2015	Sheet 2 of 5

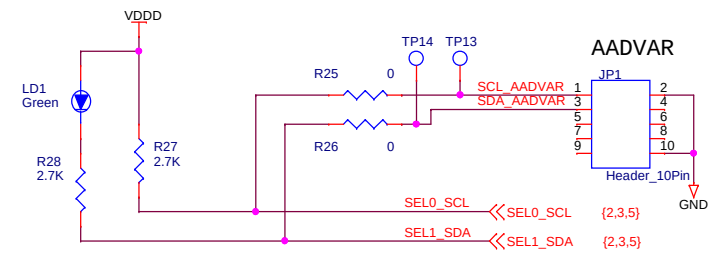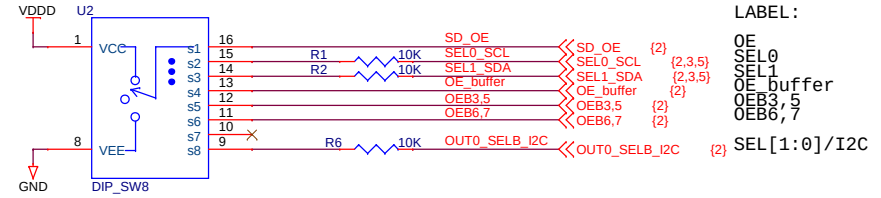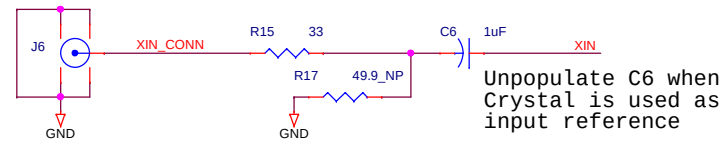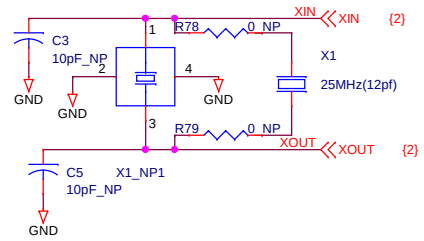



LABEL AS INDICATED FOR 3-PIN HEADERS

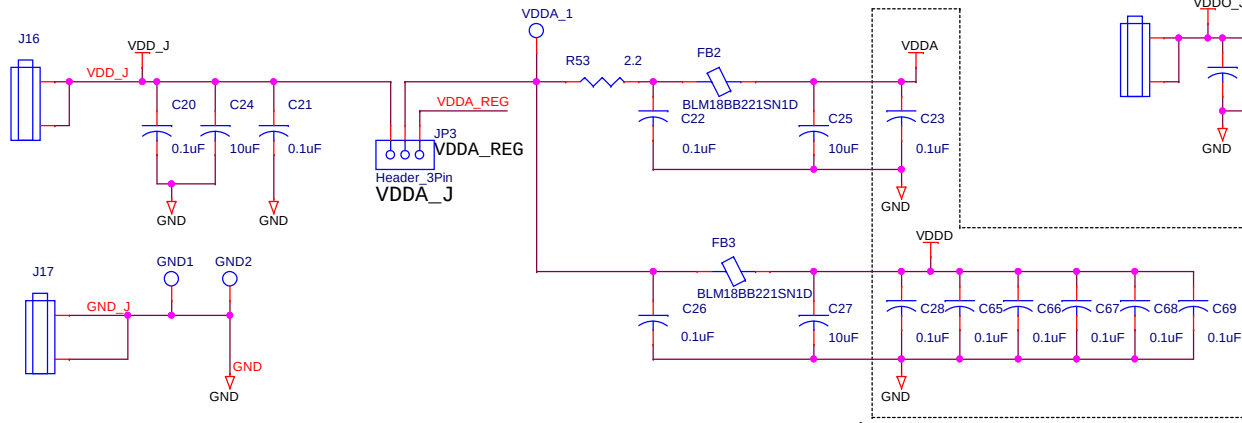

Locate near
DUT power pin

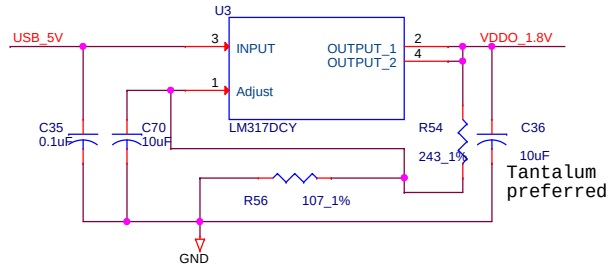


Tantalum
preferred

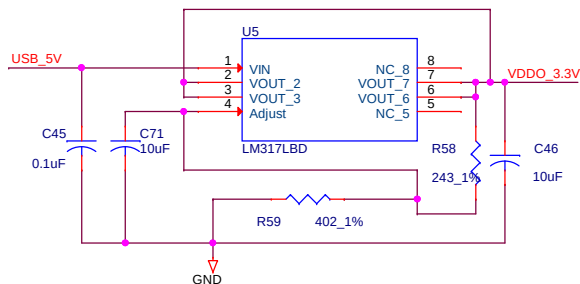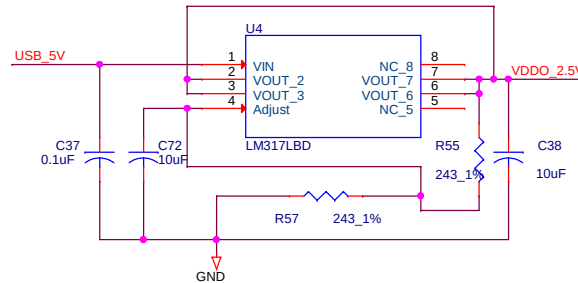

USB_5V << USB_5V (5)
VDDA_REG << VDDA_REG (5)

PCB Copper Decal
Recommendations for LM317LD
S0-8

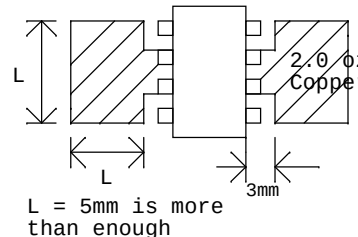


Header Alignment:



Single pin header above
and below the center pin
of 3-pin header so that
center pin can be jumped
with the surrounding 4
pins, shown as left

LABEL ON EACH RESPECTIVE PIN OF
HEADERS: 1.8V, 2.5V, 3.3V

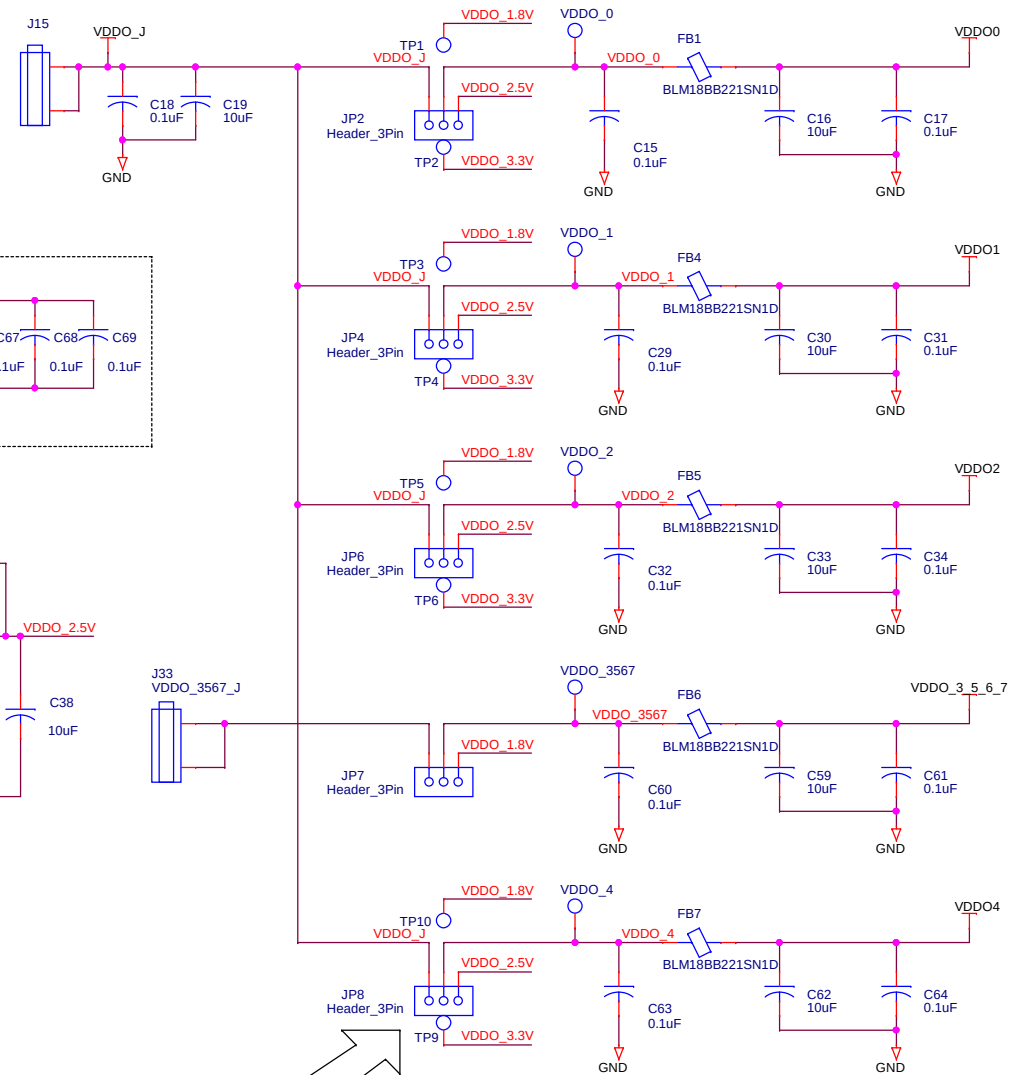

Title		
IDT_5P49V5907_EVM_BOARD_REV1		
Size	Document Number	Rev
B	305-PD-15-0204	1
Date:	Friday, May 22, 2015	Sheet 4 of 5

