

---

**HS-303AEH**Total Dose Test Report

---

**Introduction**

This report shows the results of a Low Dose Rate (LDR) total dose test of the [HS-303AEH](#) dual SPDT analog switch. The data for this report was obtained from wafer-by-wafer total dose acceptance testing of the part. Samples were irradiated at LDR (<0.01rad(Si)/s) under bias and with all pins grounded.

The HS-303AEH is acceptance-tested on a wafer-by-wafer basis to 300krad(Si) at High Dose Rate (HDR) (50-300rad(Si)/s) and to 50krad(Si) at LDR (0.01rad(Si)/s), ensuring product hardness to the specified level for both dose rates.

The part effectively met the SMD post-radiation specification limits at all downpoints. No significant differences in the total dose response were noted for any parameters between the biased and grounded irradiation or the two switches.

**Product Description**

The HS-303AEH dual SPDT analog switch is fabricated using dielectrically isolated BiCMOS technology for latch-up free operation. The parts offer low-resistance switching performance for analog voltages up to the supply rails. Switch ON-resistance is low and stays reasonably constant over operating voltage, switch current, and total dose irradiation. The ON-resistance is typically 50Ω pre-rad and 60Ω post 300krad(Si) at HDR. The device provides break-before-make switching with controlled, specified break-before-make delay. The HS-303ARH should be operated with nominal ±15V supplies.

Specifications for radiation hardened MIL-PRF-38535 (QML) devices are controlled by the Defense Logistics Agency, Land and Maritime (DLA), Columbus, OH. Detailed electrical specifications for the HS-303AEH are contained in SMD [5962-95813](#).

**Related Literature**

For a full list of related documents, visit our website:

- [HS-303AEH](#) device page

## 1. Test Description

### 1.1 Irradiation Facilities

LDR irradiation was performed at 0.01rad(Si)/s using the Renesas Palm Bay N40 panoramic irradiator.

### 1.2 Test Fixturing

Biased irradiation was performed in accordance with the internally specified irradiation diagram. Grounded irradiation was performed with all pins hardwired to ground.

### 1.3 Characterization Equipment and Procedures

All electrical testing was performed outside the irradiator using the production Automated Test Equipment (ATE) with data logging at each downpoint. Downpoint electrical testing was performed at room temperature.

### 1.4 Experimental Matrix

The experimental matrix consisted of 34 samples irradiated at LDR under bias and 34 samples irradiated at LDR with all pins grounded. The irradiations were carried out as part of the wafer-by-wafer Radiation Lot Acceptance Testing (RLAT) of fabrication lot DWP3TEH. Samples were assembled in hermetic 14 Ld flatpacks, processed through the standard burn-in cycle, and screened to the room temperature ATE limits prior to the acceptance test.

### 1.5 Downpoints

Downpoints were 0, 50, and 100krad(Si).

## 2. Results

### 2.1 Attributes Data

**Table 1. HS-303AEH LDR Total Dose Test Attributes Data**

Dose Rate (rad(Si)/s)	Bias	Sample Size	Downpoint (krad(Si))	Pass	Fail
0.01	Biased	34	0	34	0
			50	34	0
			100	34	0
0.01	Grounded	34	0	34	0
			50	34	0
			100	34	0

Note: 'Pass' indicates a device that passes all post-radiation SMD limits.

### 2.2 Variables Data

The plots in [Figures 1](#) through [15](#) show data at all three downpoints for key parameters. The plots show the response to total dose irradiation at LDR for the biased (per SMD) and unbiased (all pins grounded) cases. We chose to plot the average for these parameters due to the relatively large sample sizes, and showed minimum and maximum error bars as well. In most cases, the figures plot the average of two switches or of two address inputs. No differences in total dose response were noted between biased and grounded irradiation for any parameter, and no channel sensitivity was observed.

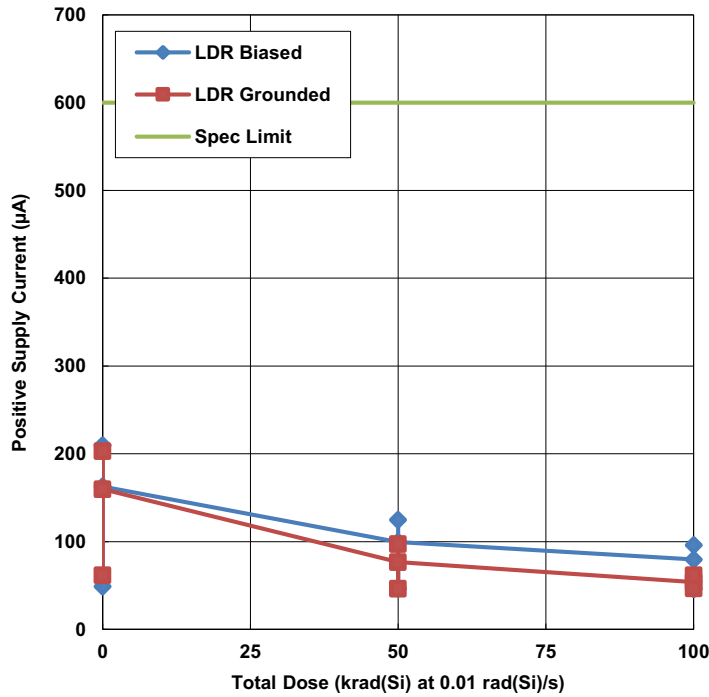


Figure 1. HS-303AEH positive power supply current as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limit is 600µA maximum.

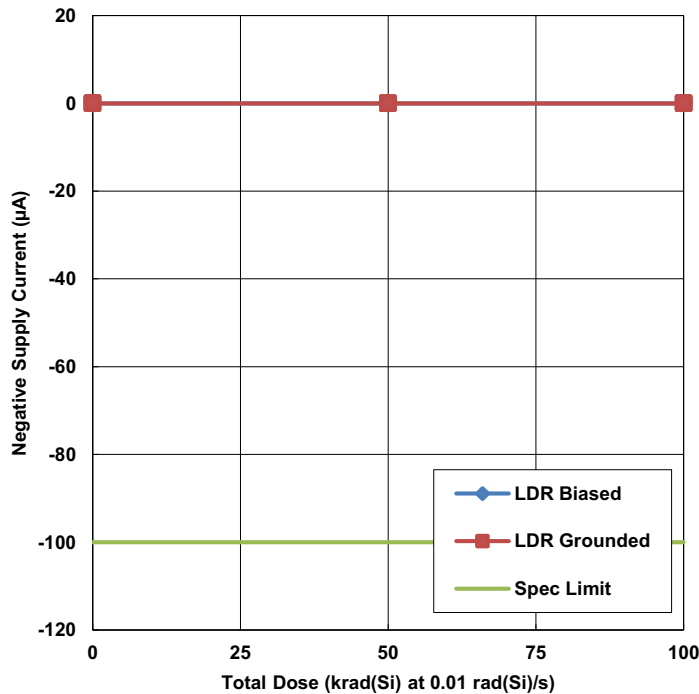


Figure 2. HS-303AEH negative power supply current as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limit is -100µA minimum.

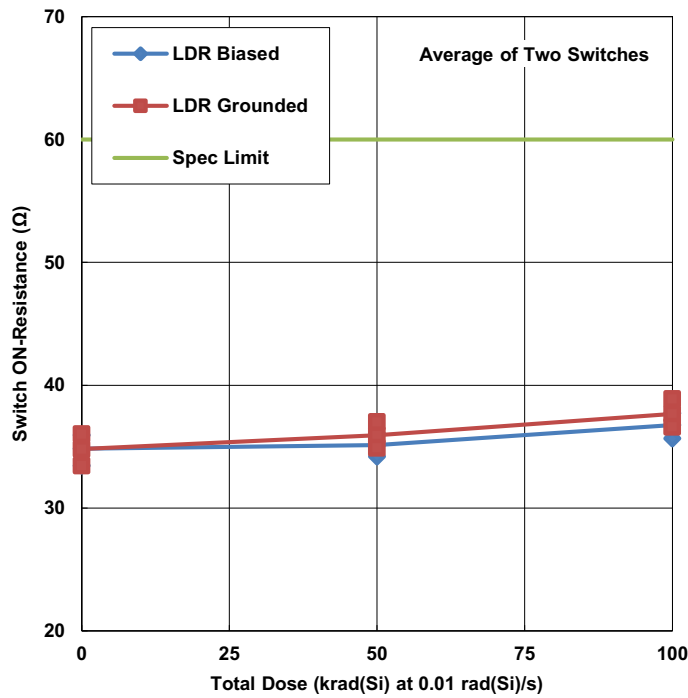


Figure 3. HS-303AEH switch ON-resistance, drain voltage 10V, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limit is 60Ω maximum.

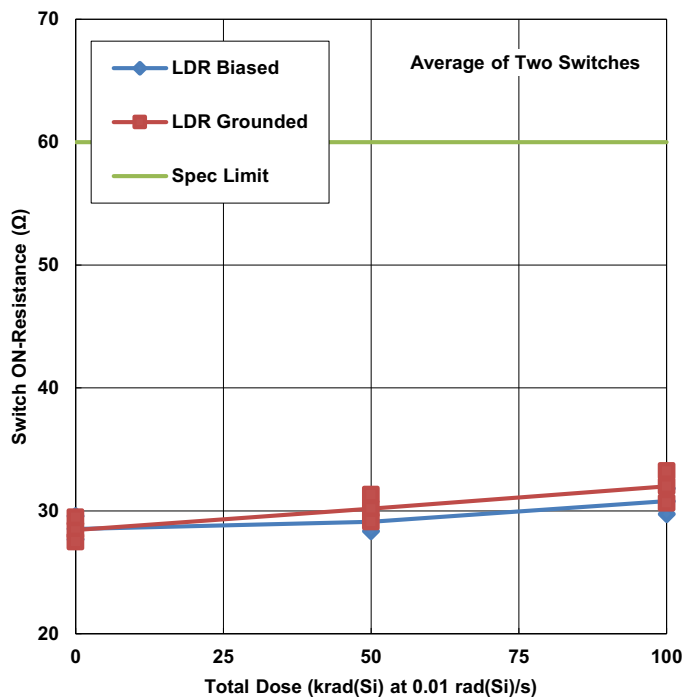


Figure 4. HS-303AEH switch ON-resistance, drain voltage -10V, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limit is 60Ω maximum.

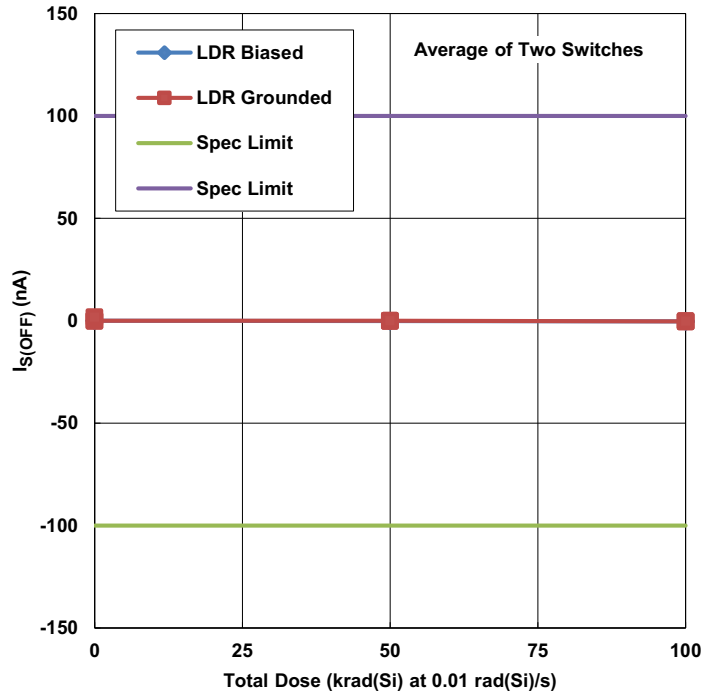


Figure 5. HS-303AEH leakage current into the source terminal of an OFF switch, source voltage +14V and drain voltage -14V, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limits are -100nA to 100nA.

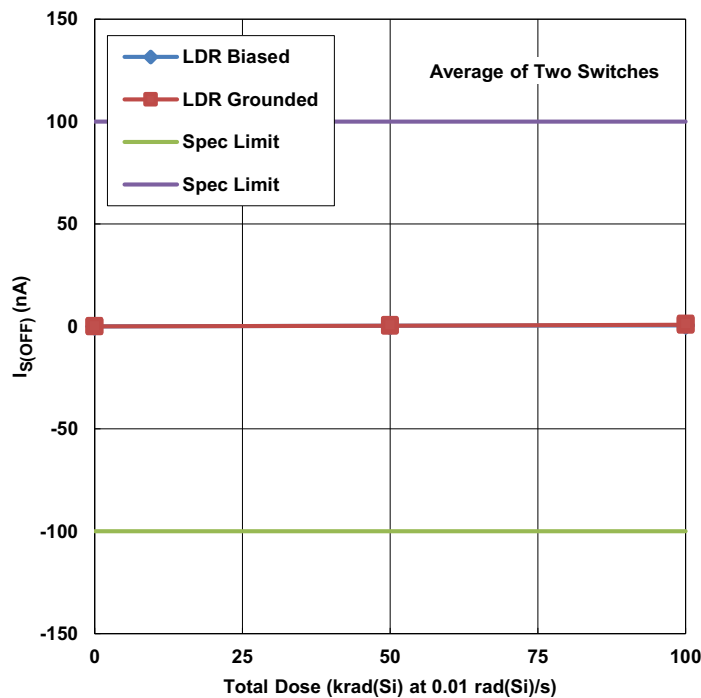


Figure 6. HS-303AEH leakage current into the source terminal of an OFF switch, source voltage -14V and drain voltage +14V, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limits are -100nA to 100nA.

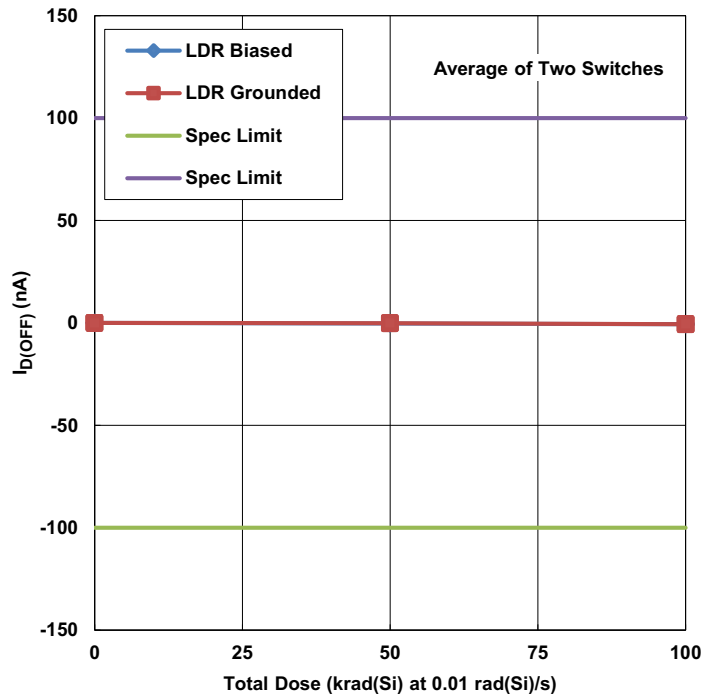


Figure 7. HS-303AEH leakage current into the drain terminal of an OFF switch, source voltage +14V and drain voltage -14V, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limits are -100nA to 100nA.

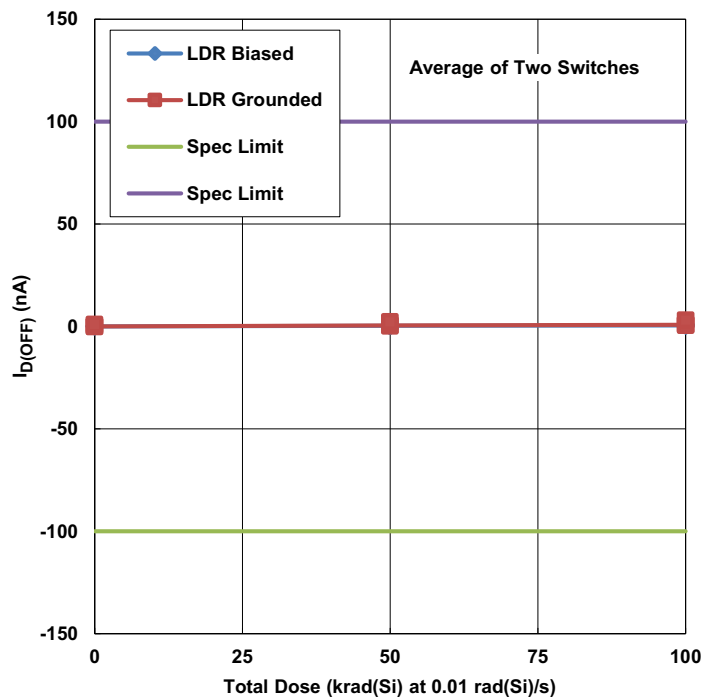


Figure 8. HS-303AEH leakage current into the drain terminal of an OFF switch, source voltage -14V and drain voltage +14V, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limits are -100nA to 100nA.

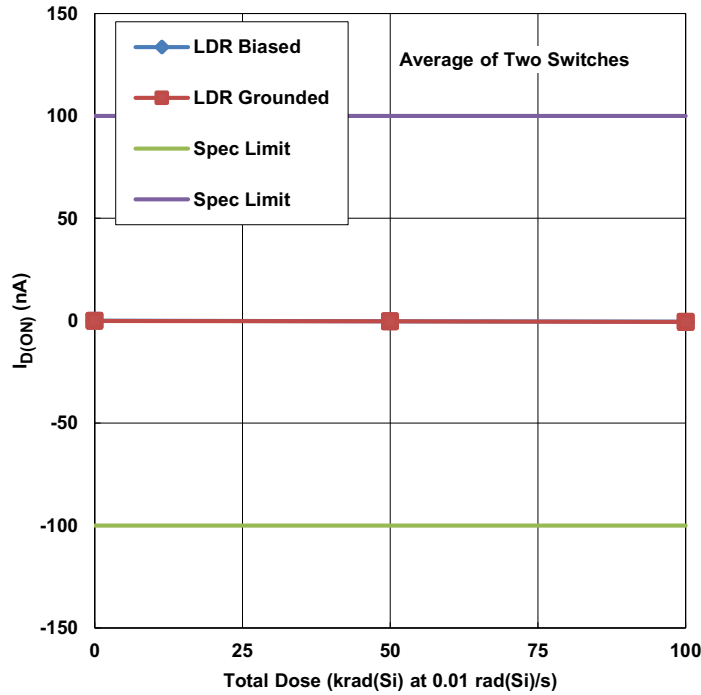


Figure 9. HS-303AEH leakage current into the drain and source terminals of an ON switch, source and drain tied together at +14V, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The SMD limits are -100nA to 100nA.

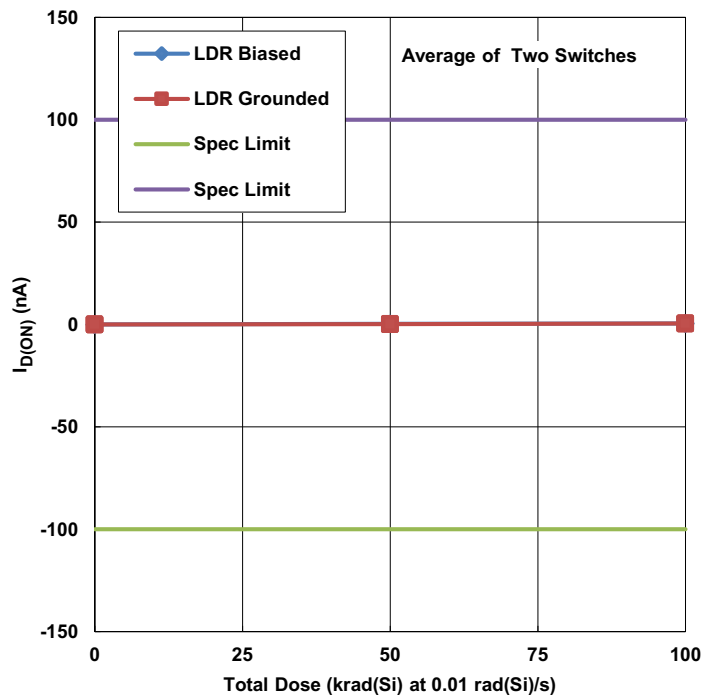


Figure 10. HS-303AEH leakage current into the drain and source terminals of an ON switch, source and drain tied together at -14V, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The SMD limits are -100nA to 100nA.

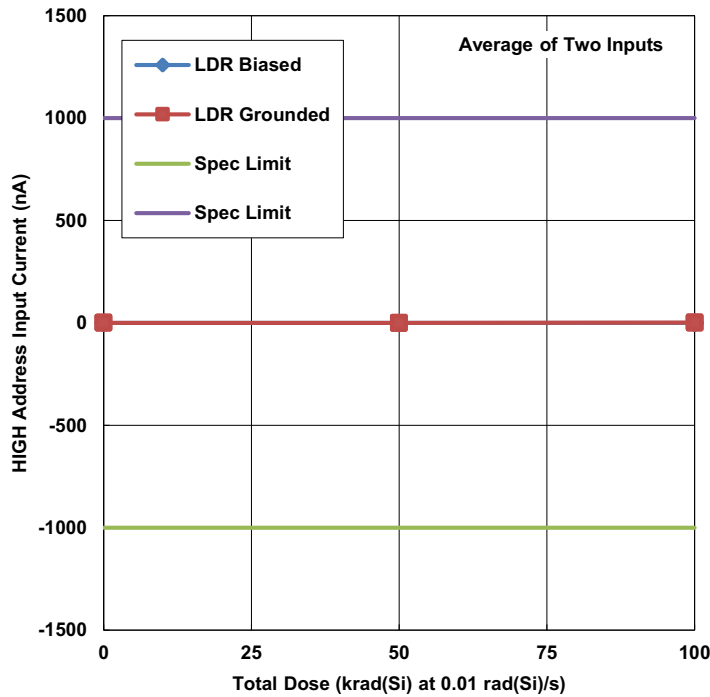


Figure 11. HS-303AEH HIGH level address input current, average of two address inputs, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limits are -1000nA to 1000nA.

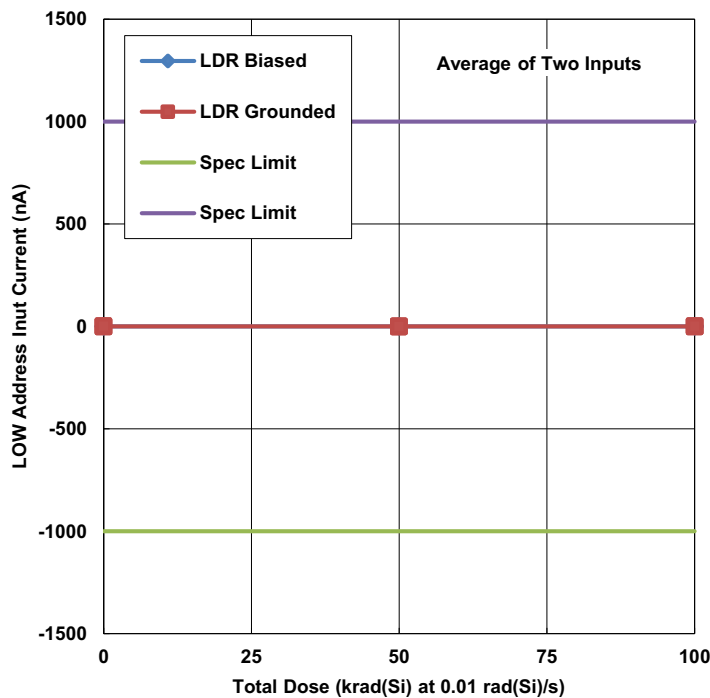


Figure 12. HS-303AEH LOW level address input current, average of two address inputs, as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limits are -1000nA to 1000nA.



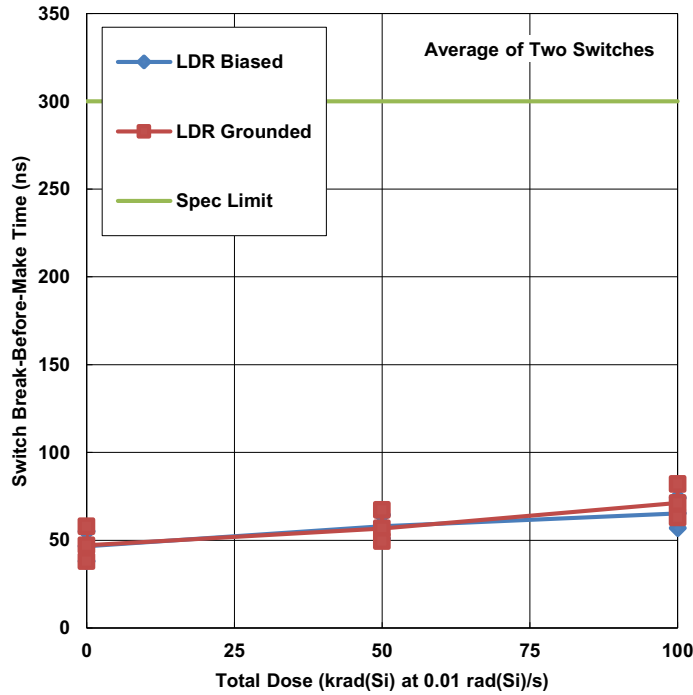


Figure 13. HS-303AEH switch break-before-make time as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limit is 300ns maximum.

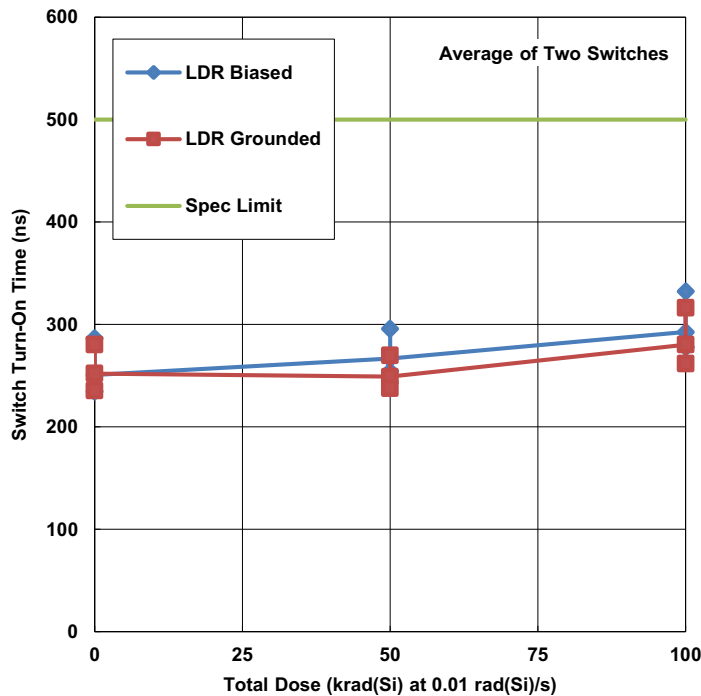


Figure 14. HS-303AEH switch turn-on time as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limit is 500ns maximum.

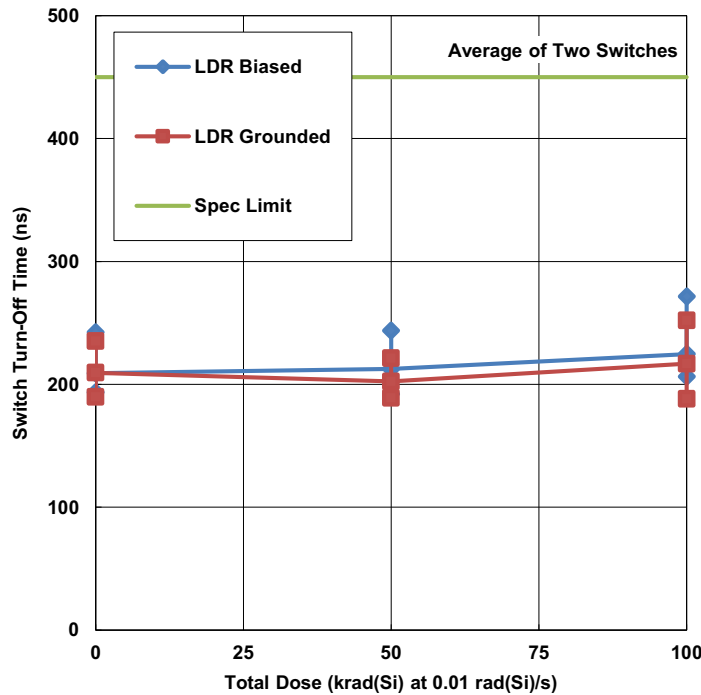


Figure 15. HS-303AEH switch turn-off time as a function of total dose irradiation for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s and the sample size was 34 for each cell. The post-radiation SMD limit is 450ns maximum.

### 3. Discussion and conclusion

The report show the results of a Low Dose Rate (LDR) total dose test of the HS-303AEH dual SPDT analog switch. The data for this report was obtained from wafer-by-wafer acceptance testing of the part. Samples were irradiated at 0.01rad(Si)/s under bias and with all pins grounded. All parameters remained within the SMD and ATE post-radiation limits at all downpoints. The results have been summarized in a [Table 1 on page 2](#) followed by a limited number of curves of interest ([Figures 1](#) through [15](#)).

The part is acceptance tested on a wafer-by-wafer basis to 300krad(Si) at High Dose Rate (HDR) (50-300rad(Si)/s) and to 50krad(Si) at LDR (0.01rad(Si)/s), ensuring hardness to the specified level for both dose rates. No significant differences in LDR response were noted between biased and grounded irradiation for any parameters. Additionally, no channel-to-channel differences were noted, either in the pre-radiation data or in the total dose response of the parts.

## 4. Appendix

**Table 2. Reported Parameters and Their Post-Radiation SMD Limits**

Figure	Parameter	Low Limit	High Limit	Units	Notes
<a href="#">1</a>	Positive Power Supply Current	-	600	μA	
<a href="#">2</a>	Negative Power Supply Current	-100	-	μA	
<a href="#">3</a>	ON-Resistance, +10V	-	60	Ω	Average of 2 switches
<a href="#">4</a>	ON-Resistance, -10V	-	60	Ω	Average of 2 switches
<a href="#">5</a>	Source OFF Leakage, ±14V	-100	100	nA	Average of 2 switches
<a href="#">6</a>	Source OFF Leakage, ±14V	-100	100	nA	Average of 2 switches
<a href="#">7</a>	Drain OFF leakage, ±14V	-100	100	nA	Average of 2 switches
<a href="#">8</a>	Drain OFF leakage, ±14V	-100	100	nA	Average of 2 switches
<a href="#">9</a>	Drain and Source ON Leakage, +14V	-100	100	nA	Average of 2 switches
<a href="#">10</a>	Drain and Source ON Leakage, -14V	-100	100	nA	Average of 2 switches
<a href="#">11</a>	High Level Address Input Current	-1000	1000	nA	Average of 2 inputs
<a href="#">12</a>	Low Level Address Input Current	-1000	1000	nA	Average of 2 inputs
<a href="#">13</a>	Switch Break-Before-Make Time	-	300	ns	Average of 2 switches
<a href="#">14</a>	Switch Turn-On Time	-	500	ns	Average of 2 switches
<a href="#">15</a>	Switch Turn-Off Time	-	450	ns	Average of 2 switches

---

## 5. Revision History

Rev.	Date	Description
0.00	Apr.8.19	Initial release

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
  - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
  - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)

## Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

## Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

## Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.