

Customer Notification

Applilet2 for V850ES/Fx3

Device Driver Configurator

Operating Precautions

AP-V850FX3-EE

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

"Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.

10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority- owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

Table of Contents

A)	Table of Operating Precautions for AP-V850FX3-EE	5
B)	Description of Operating Precautions for AP-V850FX3-EE	6
	No. A1 Project Options not saved on module base	6
	No. A2 Windows™ Regional Settings may stop Applilet	6
	No. A3 Setting of certain baudrates in CAN macro is not possible	6
	No. A4 Missing tab for Port CS in port dialog for V850ES/Fx3-L	7
	No. A5 VSWC register setting defined twice	7
	No. A6 Setting of certain baudrates in CAN macro is not possible	8
	No. A7 Wrong interrupt disabled in CSIBn “Single Transfer” Transmission or Transmission/Reception mode	9
	No. A8 No user code section for interrupt functions MD_INTTAAAnCCm() and MD_INTTAABnCCm() in pulse measurement mode for TAAAn and TABn	10
C)	Supported Devices	11
D)	Supported Operating Systems	11
E)	Supported Development Environments	12
F)	Valid Specification	12
G)	Copyright Notices	13
H)	Revision History	13

A) Table of Operating Precautions for AP-V850FX3-EE

Table A-1 Table description

No.	Outline	Version	AP2-V850FX3-EE		
			V2.41	V2.42	V2.43
A1	Project Options not saved on module base		x	✓	✓
A2	Windows Regional Settings may stop Applilet		x	x	x
A3	Setting of certain baud rates in CAN macro is not possible		x	x	x
A4	Missing tab for Port CS in port dialog for V850ES/FF3-L and V850ES/FG3-L		x	✓	✓
A5	VSWC register setting defined twice		x	✓	✓
A6	Wrong code in "Master receive control" block of IIC0 MasterHandler() function		x	✓	✓
A7	Wrong interrupt disabled in CSIBn "Single Transfer" Transmission or Transmission/Reception mode		x	x	✓
A8	No user code section for interrupt functions MD_INTTAA _n CC _m () / MD_INTTAA _{Bn} CC _m () in pulse measurement mode for TAA _n / TAB _n		x	x	✓

- ✓: Not applicable
- x: Applicable
- : Not checked

B) Description of Operating Precautions for AP-V850FX3-EE

Table B-1 No. A1 Project Options not saved on module base

<p><u>Version:</u> V2.41</p> <p><u>Toolchains:</u> GHS</p> <p><u>Example:</u> The option of an individual source file disappears though the option of the whole project is preserved when the MULTI project is merged when the code again is generated.</p> <p><u>Workaround</u> Please set the option of the individual source file after the code is generated again</p>
--

Table B-2 No. A2 Windows™ Regional Settings may stop Applilet

<p><u>Version:</u> V2.41, V2.42, 2.43</p> <p><u>Toolchains:</u> GHS, IAR, NEC</p> <p><u>Example:</u> If the regional setting of the Windows OS defines both, “Decimal symbol” and “Digit Grouping” as “Comma”, the initialization process of Applilet fails.</p> <p><u>Workaround</u> Specify either one or the other as ‘.’ (dot).</p>

Table B-3 No. A3 Setting of certain baudrates in CAN macro is not possible

<p><u>Version:</u> V2.41, V2.42, 2.43</p> <p><u>Toolchains:</u> GHS, IAR, NEC</p> <p><u>Example:</u> If the regional setting of the Windows OS defines “Decimal symbol” as “Comma”, certain baudrates in baudrate settings tab can not be set</p> <p><u>Workaround</u> Specify value with “Comma” or change setting of the Windows™ OS regional settings “Decimal Symbol” to ‘.’ (dot).</p>

Table B-4 No. A4 Missing tab for Port CS in port dialog for V850ES/Fx3-L

<p><u>Version:</u> V2.41</p> <p><u>Toolchains:</u> GHS, IAR, NEC</p> <p><u>Example:</u> There is no tab to configure Port CS in port configuration dialog for V850ES/FF3-L and V850ES/FG3-L.</p> <p><u>Workaround</u> None</p>
--

Table B-5 No. A5 VSWC register setting defined twice

<p><u>Version:</u> V2.41</p> <p><u>Toolchains:</u> GHS, IAR, NEC</p> <p><u>Example:</u> VSWC register defined twice at start.c and Clock_Init()</p> <p><u>Workaround</u> Please edit source files manually</p>
--

Table B-6 No. A6 Setting of certain baudrates in CAN macro is not possible

<u>Version:</u> V2.41	
<u>Toolchains</u> GHS, IAR, NEC	
<u>Example:</u>	
<pre> /* Master receive control */ else { if(glic0RxCnt < glic0RxLen) { *gplic0RxAddress = IIC0; gplic0RxAddress++; gplic0RxCnt++; if(glic0RxCnt == glic0RxLen) { ACKE0 = 0; WRELO = 1; WTIMO = 1; CALL_IIC0_MasterReceiveEnd(); } else WRELO = 1; } else WRELO = 1; CALL_IIC0_MasterReceiveEnd(); } } </pre>	<p>Deleted</p> <p>Deleted</p> <p>Added</p>
<u>Workaround</u> Please edit source files manually	

**Table B-7 No. A7 Wrong interrupt disabled in CSIBn “Single Transfer”
Transmission or Transmission/Reception mode**

Version:

V2.41, V2.42

Toolchains:

GHS, IAR, NEC

Example:

CSIB0_SendData()

```

gCsib0TxCnt = txnum;
gpCsib0TxAddress = txbuf;
if (CB0CTL2 != CSIB_DATA_LENGTH_8)
{
    if (txnum & 0x1)
    {
        status = MD_ARGERROR;
    }
    else
    {
        CB0TMK = 1;           /* Deleted */
        CB0RMK = 1;           /* Added */
        CB0TX = *(USHORT* )gpCsib0TxAddress;
        gpCsib0TxAddress += 2;
        gCsib0TxCnt -= 2;
        CB0TMK = 0;           /* Deleted */
        CB0RMK = 0;           /* Added */
        status = MD_OK;
    }
}
else
{
    CB0TMK = 1;           /* Deleted */
    CB0RMK = 1;           /* Added */
    CB0TX = *gpCsib0TxAddress;
    gpCsib0TxAddress++;
    gCsib0TxCnt--;
    CB0TMK = 0;           /* Deleted */
    CB0RMK = 0;           /* Added */
    status = MD_OK;
}

```

Workaround

Please edit source files manually

Table B-8 No. A8 No user code section for interrupt functions MD_INTTAA_nCC_m() / MD_INTTAA_{Bn}CC_m() in pulse measurement mode for TAA_n and TAB_n

Version:

V2.41, V2.42

Toolchains:

GHS, IAR, NEC

Example:

When TAA_n and TAB_n are set up for pulse width measurement mode, the user code sections for the interrupt functions MD_INTTAA_bCC_m() and MD_INTTAB_nCC_m() will not be generated.

Workaround

Please edit source files manually

C) Supported Devices


ROM	V850ES/FE3	V850ES/FF3	V850ES/FG3	V850ES/FJ3	V850ES/FK3
	64pin	80pin	100pin	144pin	176pin
1024 Kbyte	-	-	-	70F3382	70F3385
768 Kbyte	-	-	-	70F3381	70F3384
512 Kbyte	-	-	70F3377A	70F3380	70F3383
384 Kbyte	-	-	70F3376A	70F3379	-
256 Kbyte	70F3371	70F3373	70F3375	70F3378	-
128 Kbyte	70F3370A	70F3372	70F3374	-	-

ROM	V850ES/FE3-L	V850ES/FF3-L	V850ES/FG3-L
	64pin	80pin	100pin
256 Kbyte	70F3614	70F3619	70F3622
192 Kbyte	70F3613	70F3618	70F3621
128 Kbyte	70F3612	70F3617	70F3620
96 Kbyte	70F3611	70F3616	-
64 Kbyte	70F3610	70F3615	-

Supported
Not supported

D) Supported Operating Systems

Applilet supports Windows XP, Windows Vista and Windows 7 (32Bit editions).
 For operation the Microsoft .NET Framework Version 2.0 Redistributable Package is required.
 If the Microsoft .NET Framework Version 2.0 Redistributable Package is not installed, the following Windows error message will occur during application start:

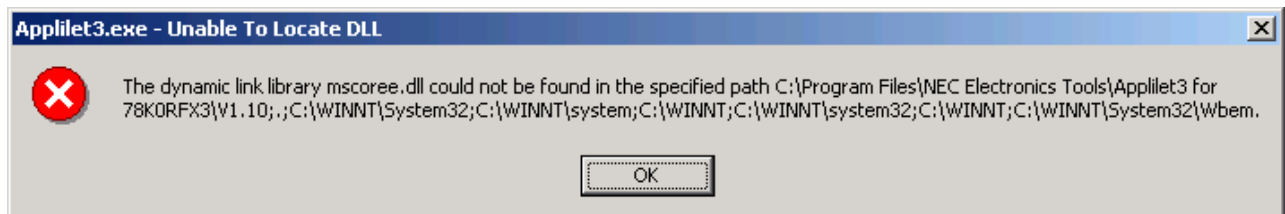

The Microsoft .NET Framework Version 2.0 Redistributable Package can be downloaded from the Microsoft Corporation WEB Site: <http://www.microsoft.com/downloads>

Download Package: .NET Framework Version 2.0 Redistributable Package (x86)

Please use .NET Framework version 2.0 Redistributable package with latest patches.

E) Supported Development Environments

Renesas Electronics Development Tools	
Product Name	Version
Project Manager PM+	V6.31 or later
CA850	V3.46 or later
ID850QB	V3.60 or later
Device File Package DF70F3385	V1.22 or later
Device File Package DF70F3622	V1.00 or later

IAR Systems Development Tools	
Product Name	Version
Embedded Workbench for V850 EWW850	V3.50a or later
Device File Package DF-V850ES-Fx3-EE	V1.22 or later
Device File Package DF-V850ES-Fx3-L-EE	V1.00 or later

Green Hills Development Tools	
Product Name	Version
GHS MULTI	V4.2.3 or later
Device File Package DF-V850ES-Fx3-EE	V1.22 or later
Device File Package DF-V850ES-Fx3-L-EE	V1.00 or later

F) Valid Specification

Item	Date published	Document No.	Document Title
1	March 30, 2011	R01UH0237ED0300_V850ESFx.pdf	V850ES/Fx3 Hardware User's Manual

G) Copyright Notices

- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of Renesas Electronics. Renesas Electronics assumes no responsibility for any errors that may appear in this document.
- Renesas Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products listed in the documents or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
- Descriptions of circuits, software and other related information in the document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. Renesas Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- Intel and Pentium are registered trademarks of Intel Corporation and its subsidiaries in the United States and other countries.
- Windows, Windows XP, Windows Vista, Windows 7, and .NET Framework are registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- IAR Systems and IAR Embedded Workbench are trademarks owned by IAR Systems AB.
- Other trademarks, registered trademarks and company names are the properties of their respective owners.

H) Revision History

Item	Date published	Document No.	Comment
1	01-Dec-2010	R20TU0022ED0100	First Release.
2	12-May-2011	R20TU0022ED0101	Update.



Renesas Electronics Europe

R20TU0022ED0101
May 2011