

# CS+ V8.14.00

Integrated Development Environment

User's Manual: Updater

Target Device

78K0 Microcontroller

RL78 Family

78K0R Microcontroller

V850 Family

RX Family

RH850 Family

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corp. without notice. Please review the latest information published by Renesas Electronics Corp. through various means, including the Renesas Electronics Corp. website (<http://www.renesas.com>).

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
  - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
  - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

## Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

## Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

## Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

# How to Use This Manual

This manual describes the role of the CS+ integrated development environment for developing applications and systems for 78K0 microcontrollers, RL78 family, 78K0R microcontrollers, V850 family, RX family, and RH850 family, and provides an outline of its features.

CS+ is an integrated development environment (IDE) for 78K0 microcontrollers, RL78 family, 78K0R microcontrollers, V850 family, RX family, and RH850 family, integrating the necessary tools for the development phase of software (e.g. design, implementation, and debugging) into a single platform.

By providing an integrated environment, it is possible to perform all development using just this product, without the need to use many different tools separately.

Readers	This manual is intended for users who wish to understand the functions of the CS+ and design software and hardware application systems.
Purpose	This manual is intended to give users an understanding of the functions of the CS+ to use for reference in developing the hardware or software of systems using these devices.
Organization	This manual can be broadly divided into the following units.  <a href="#">1.GENERAL</a> <a href="#">2.FUNCTIONS</a> <a href="#">A.WINDOW REFERENCE</a>
How to Read This Manual	It is assumed that the readers of this manual have general knowledge of electricity, logic circuits, and microcontrollers.
Conventions	Data significance: <u>Higher</u> digits on the left and lower digits on the right Active low representation: XXX (overscore over pin or signal name) Note: Footnote for item marked with Note in the text Caution: Information requiring particular attention Remarks: Supplementary information Numeric representation: Decimal ... XXXX Hexadecimal ... 0xXXXX

# TABLE OF CONTENTS

1.	GENERAL .....	5
1.1	Introduction .....	5
1.2	Features .....	5
2.	FUNCTIONS .....	6
2.1	Manual update feature .....	6
2.2	Regularly checking for updates .....	11
2.3	Canceling an update .....	14
2.4	Resuming an update .....	14
2.5	Displaying the update history .....	14
2.6	Restoring hidden updates .....	16
A.	WINDOW REFERENCE .....	18
A.1	Description .....	18
	Revision Record .....	C - 1

## 1. GENERAL

This manual describes how to update tools and help files that have been installed.

### 1.1 Introduction

This manual covers how to update installed tools and help files to the latest versions.

### 1.2 Features

The CS+ has the following features for updating.

- This feature is for updating tools and help files that have been installed. You can acquire information on the latest version information via the Internet and display the list of available updates. Select tools that you wish to update and download and install the latest versions.

## 2. FUNCTIONS

The update feature updates installed tools and help to their latest versions.

It acquires information about the latest versions via the Internet, and then downloads and installs them.

There are three ways of updating tools and help files: manually following instructions on the screen, automatically checking for updates in accord with the settings made by the user, and automatically completing the entire process up to downloading.


**Caution** When you use the update feature, the host machine must have a connection to the Internet. Also note that an authentication dialog box for the proxy server may appear when the CS+ Update Manager window is being opened. In such a case, enter the user name and password for the proxy server.

### 2.1 Manual update feature

This section describes the manual update.

- Launch Update Manager.  
From the Windows the [Start] menu, select [Programs] >> [Renesas Electronics CS+] >> [Update Manager], or from the CS+ menu, select [Help] >> [Check for Updates...]. The [CS+ Update Manager window](#) launches.


Figure 2.1 CS+ Update Manager Window

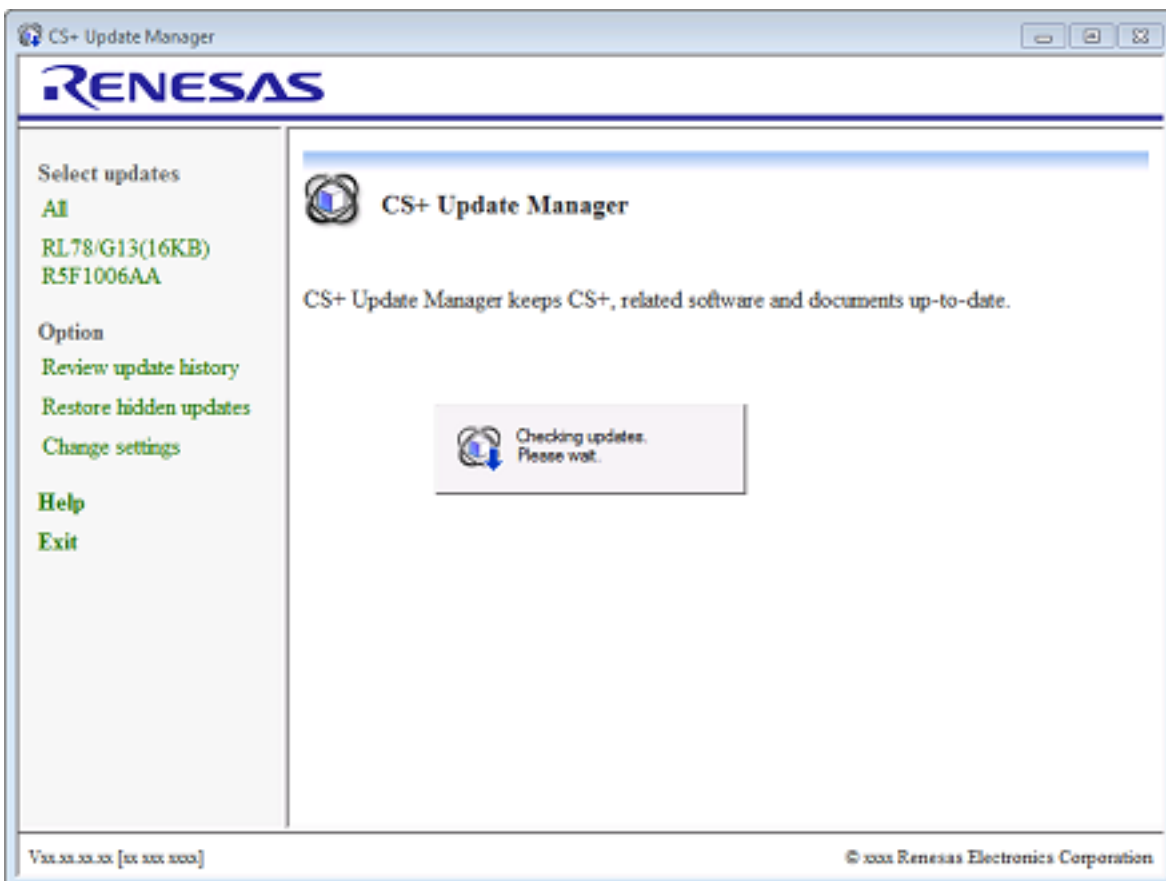

Remark 1. In Windows 8.1, click on [Update Manager] on the start screen.


Remark 2. The following image is displayed while information on the available updates is being acquired.

Figure 2.2 Image Displayed During Acquisition of Information on the Available Updates

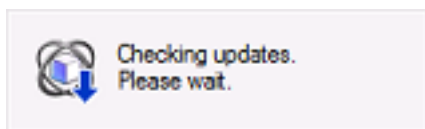

- (2) Select update items.  
A list of appropriate update items appears on the [Select updates page](#).

Figure 2.3 Select updates Page

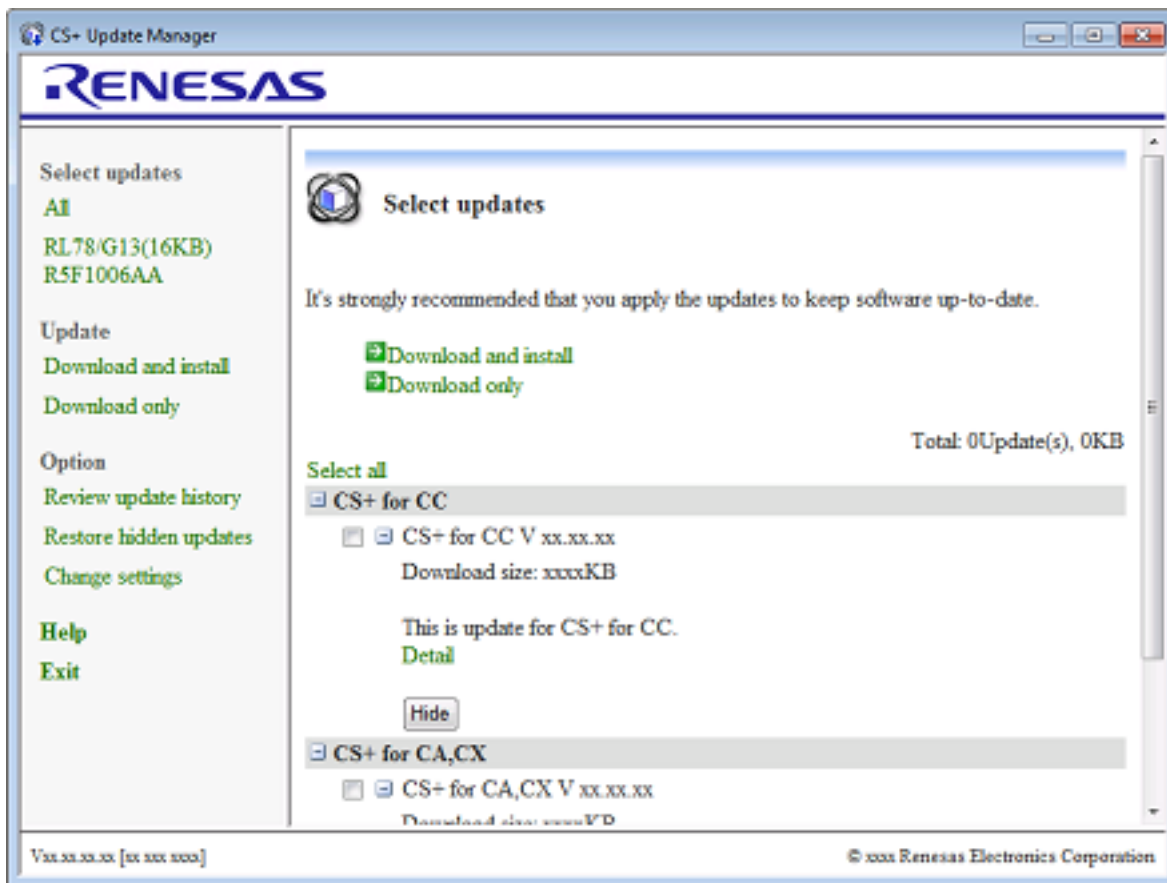

Select the check boxes of updates and click [Download and install] or [Download only] in the update selection area.

- When [Download and install] is clicked: (3)
- When [Download only] is clicked: (5)

Remark 1. In the menu area, select a microcontroller to only display update items for the selected microcontroller.  
If you launched the [CS+ Update Manager window](#) by selecting [Check for Updates...] from the [Help] menu of CS+, then update items for the microcontroller of the project currently open in CS+ is automatically selected.


Remark 2. Click [Select all] in the update selection area to select the check boxes of all updates.

Remark 3. If Update Manager failed to obtain the information, then the [Error page](#) appears.

- (3) Download and install.  
Update items selected on the [Select updates page](#) appears on the [Download and install page](#).

Remark If there are the updates that must be installed together with the updates selected on the [Select updates page](#), a Message dialog box appears.  
Click the [Yes] button on the Message dialog box to select the required updates.

Figure 2.4 Download and install Page

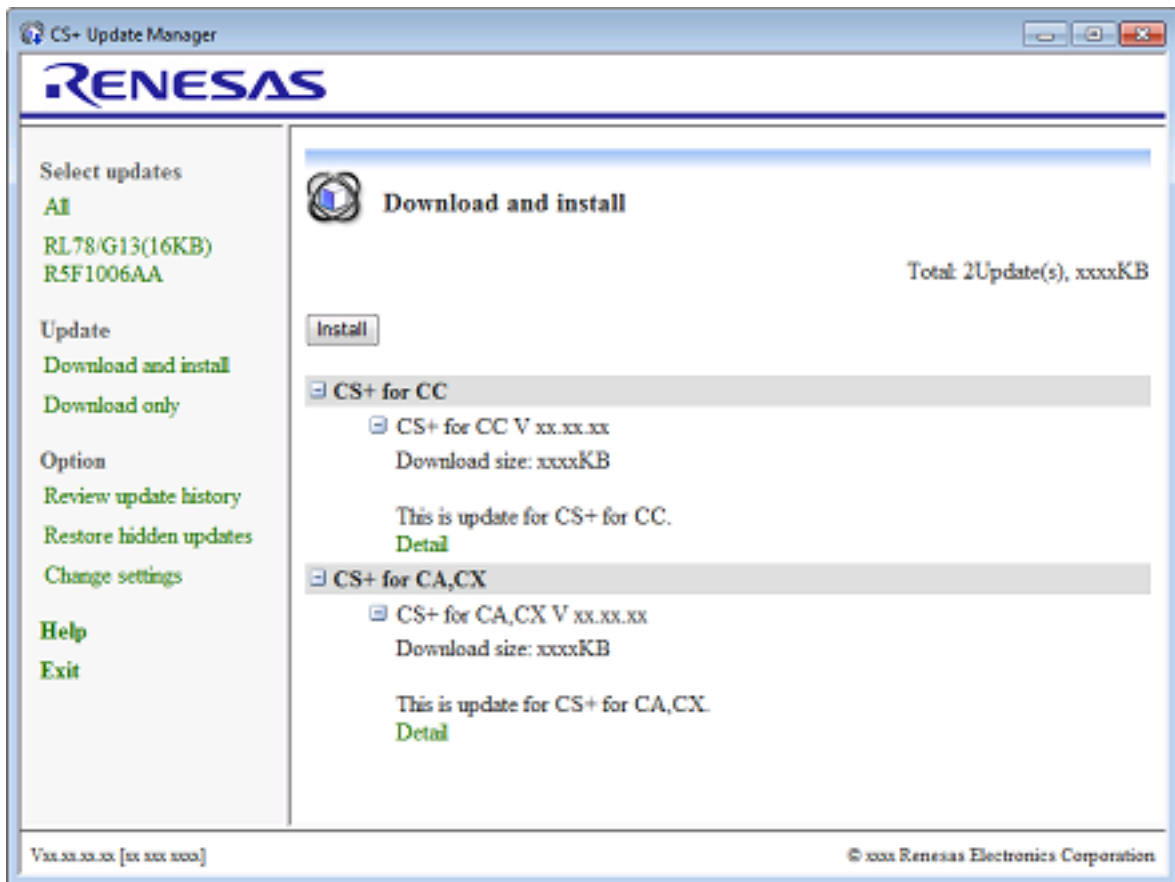

Check the information, and click the [Install] button. You must have administrator privileges to perform installation.

- (4) Confirm the download and install progress.  
Update items are downloaded, and then they are installed. A progress bar on the [Update in progress dialog box](#) displays the download and install progress.  
The download and install progress of each tool appear in the [Update status] area.

Figure 2.5 Update in progress Dialog Box (Downloading)


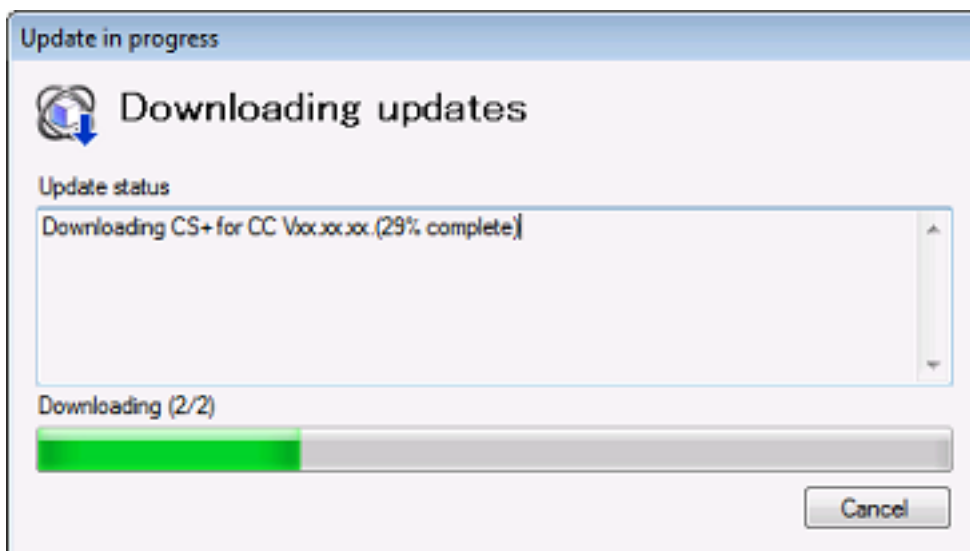


Figure 2.6 Update in progress Dialog Box (Installing)

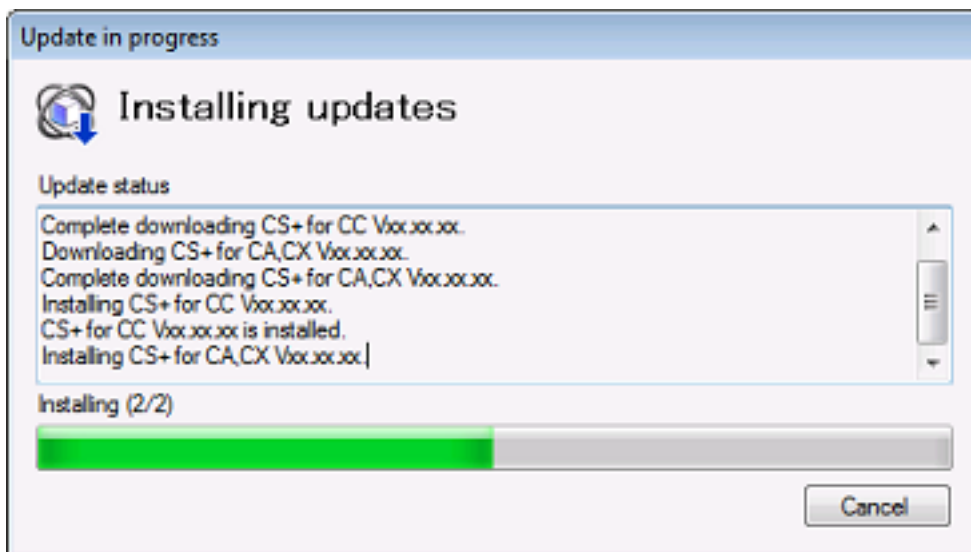


**Caution** If an emulator USB driver is installed, the confirmation dialog box may appear.

Go to (7).

- (5) Download only.  
Update items selected on the [Select updates page](#) appears on the [Download only page](#).


Figure 2.7 Download only Page

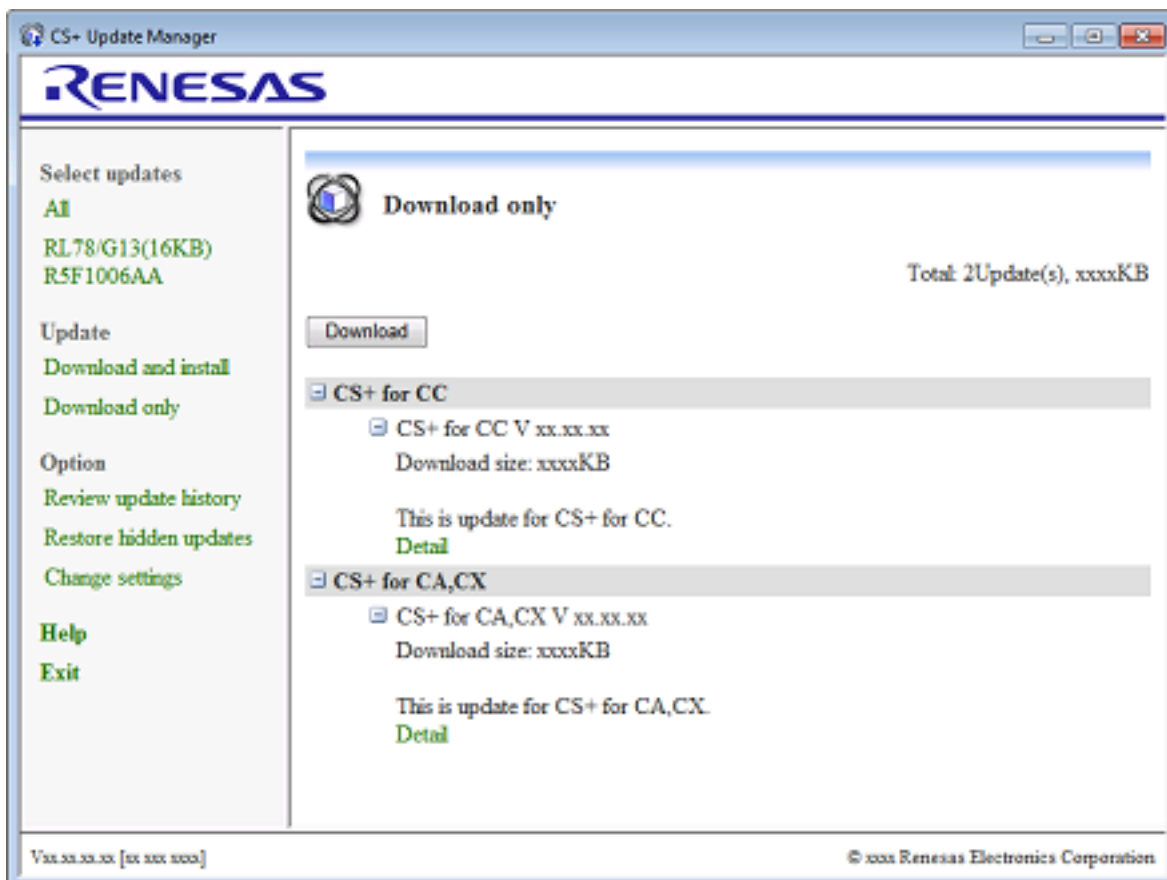

Check the information, and click the [Download] button.

- (6) Confirm the download progress.  
Update items are downloaded. A progress bar on the [Update in progress dialog box](#) displays the download progress.  
The download progress of each tool appear in the [Update status] area.


Figure 2.8 Update in progress Dialog Box

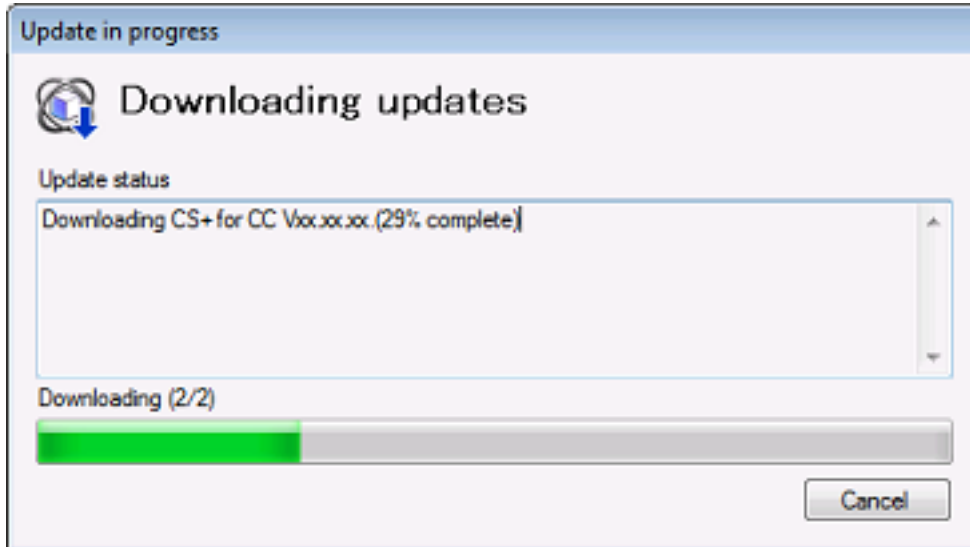

Remark See "2.5 Displaying the update history" for instructions on installing download update items later.



- (7) Display results of download and installation.  
When all update tasks are finished, the results of the update execution will appear on the [Finish page](#).

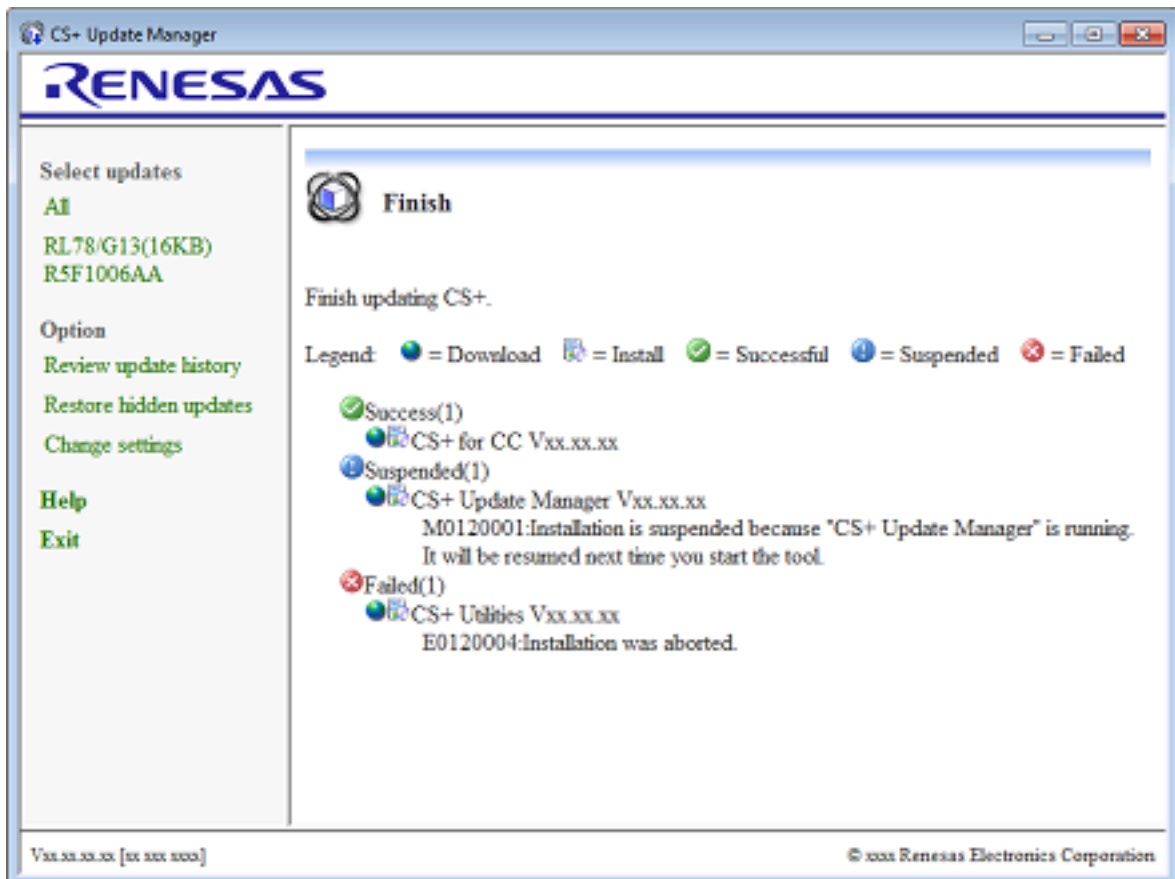Figure 2.9 Finish Page






Click the [Exit] to complete updating.

Remark 1. The icons below are displayed in the head of update titles.

	Updates are downloaded.
	Updates are installed.

Remark 2. The results of the download and/or installation are displayed via.

	Displays number of successful updates and update titles.
	Displays number of canceled updates, update titles, and messages.
	Displays number of failed updates, update titles, and messages.

## 2.2 Regularly checking for updates

This section describes how to set up regular checking for updates.


The auto-update facility automatically performs some or all of the operations that are available with the manual update facility every time a project is opened in the CS+.


(1) Auto checking function

This function performs the check for updates when a CS+ project is opened.

This function is executed when: in the Option dialog box, in the [General - Update] category, the [Check for updates when opening project.] check box is selected, and the conditions set in [Check at intervals of] are met.

Figure 2.10 Option Dialog Box ([General - Update] Category)

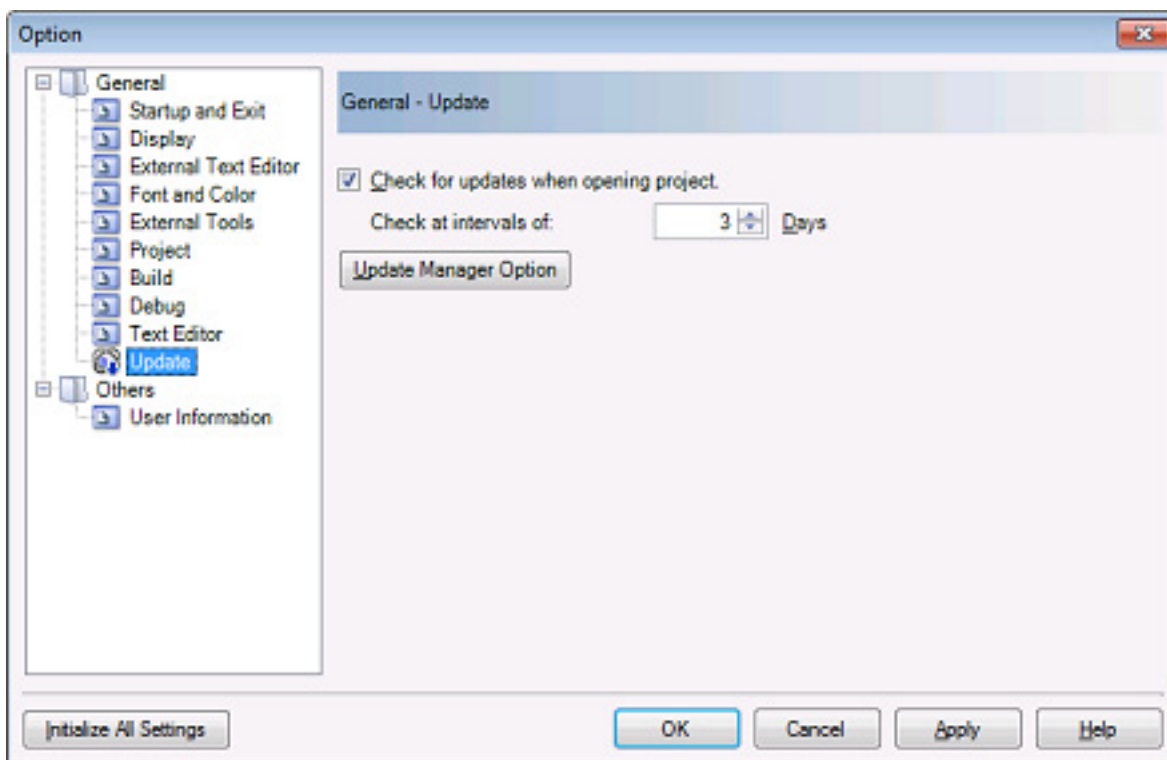

Remark 1. This function performs the check for updates in parallel with the CS+ process. While the check is ongoing, the  icon appears in the task tray.


Remark 2. If the check does not find any updates, the auto checking function exits.


(2) Auto download function

The auto download function checks if the conditions for updating in (1) are met, and then downloads any updates that were found.

This function is executed for each category when: in the [Update Manager Options dialog box](#), [Download updates automatically, and notify me when it's finished.] is selected.

Figure 2.11 Update Manager Options Dialog Box

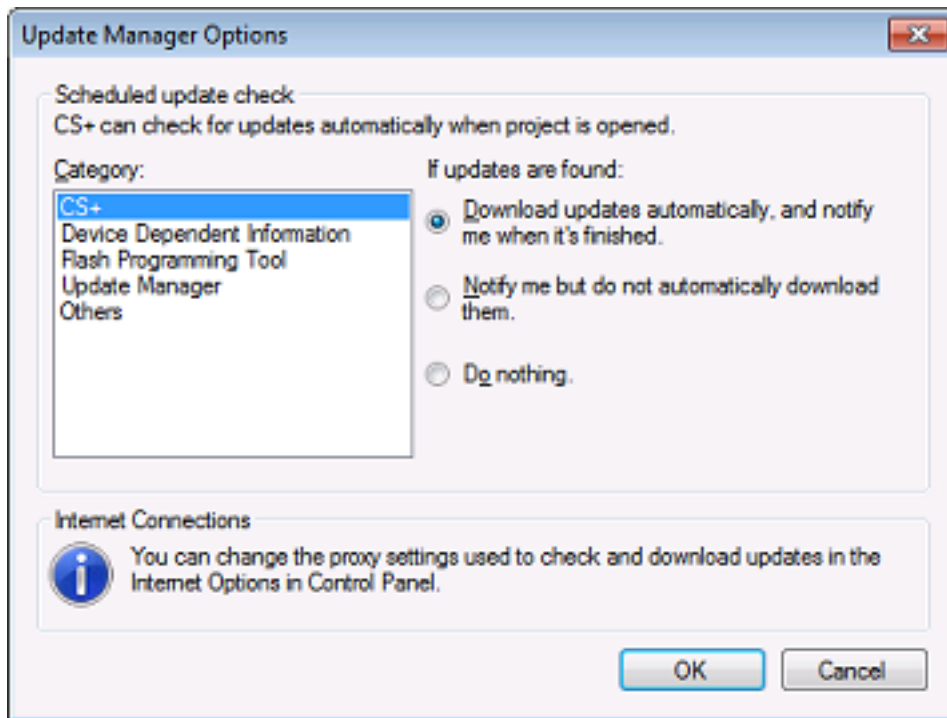

Remark 1. During the download, the  icon appears in the task tray.

Remark 2. If the check does not find any updates, the auto download function exits.

(3) The update notification function


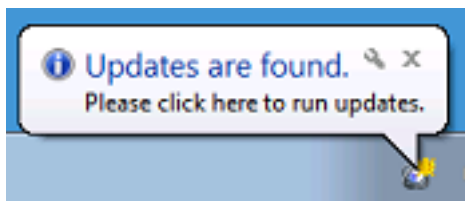
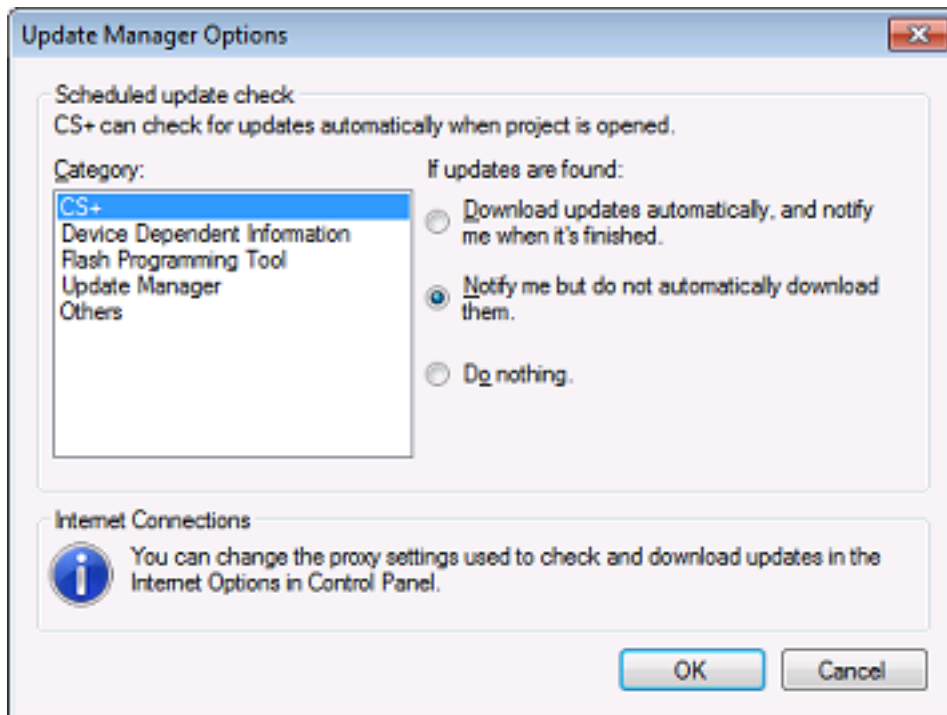
After downloading the target update in (2), the update notification feature displays an icon  notifying of the update in the task tray. If any of the updates that were found for the first time during this auto check, the following balloon help appears.

Figure 2.12 Balloon Help



And the updates are executed without performing the download when: in the [Update Manager Options dialog box](#), [Notify me but do not automatically download them.] is selected. This can be specified for each category.

Figure 2.13 Update Manager Options Dialog Box





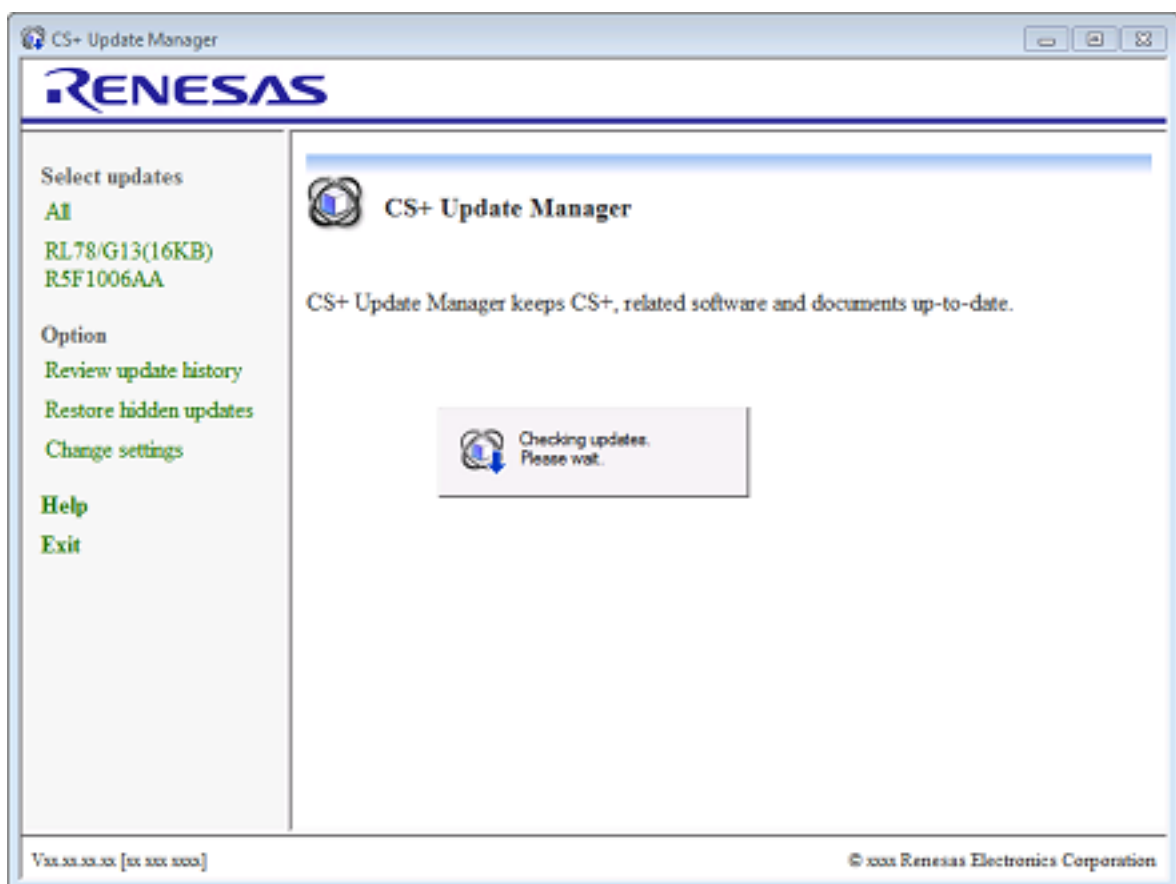
Remark Click the  in the task tray or balloon help  to display the [CS+ Update Manager window](#).

Figure 2.14 CS+ Update Manager Window



Remark Perform the installation in accordance with "2.1 Manual update feature", step (3).

### 2.3 Canceling an update

From the [Update in progress dialog box](#), click the [Cancel] button to cancel the update. If the update was canceled, then the [Finish page](#) will show that the update was canceled.

When performing an update, it is not possible to update currently running related tools or open files. For this reason, if a related tool is running then the installation will be postponed, and the [Finish page](#) will indicate that the installation was suspended.

### 2.4 Resuming an update

When Update Manager or a tool related to CS+ supporting the update function is started, it checks whether there are suspended installations.


If there are suspended installations, then if a related tool is running, a Message dialog box appears. After closing the tool, click the [Retry] button.

If a related tool is not running, a Message dialog box appears. Click the [Yes] button. Update Manager will perform the update. After the update is performed, the [CS+ Update Manager window](#) closes, and the tool that was shut down is restarted.

### 2.5 Displaying the update history


In the menu area of the [CS+ Update Manager window](#), select [Review update history]. The [History page](#) appears.

Figure 2.15 History Page

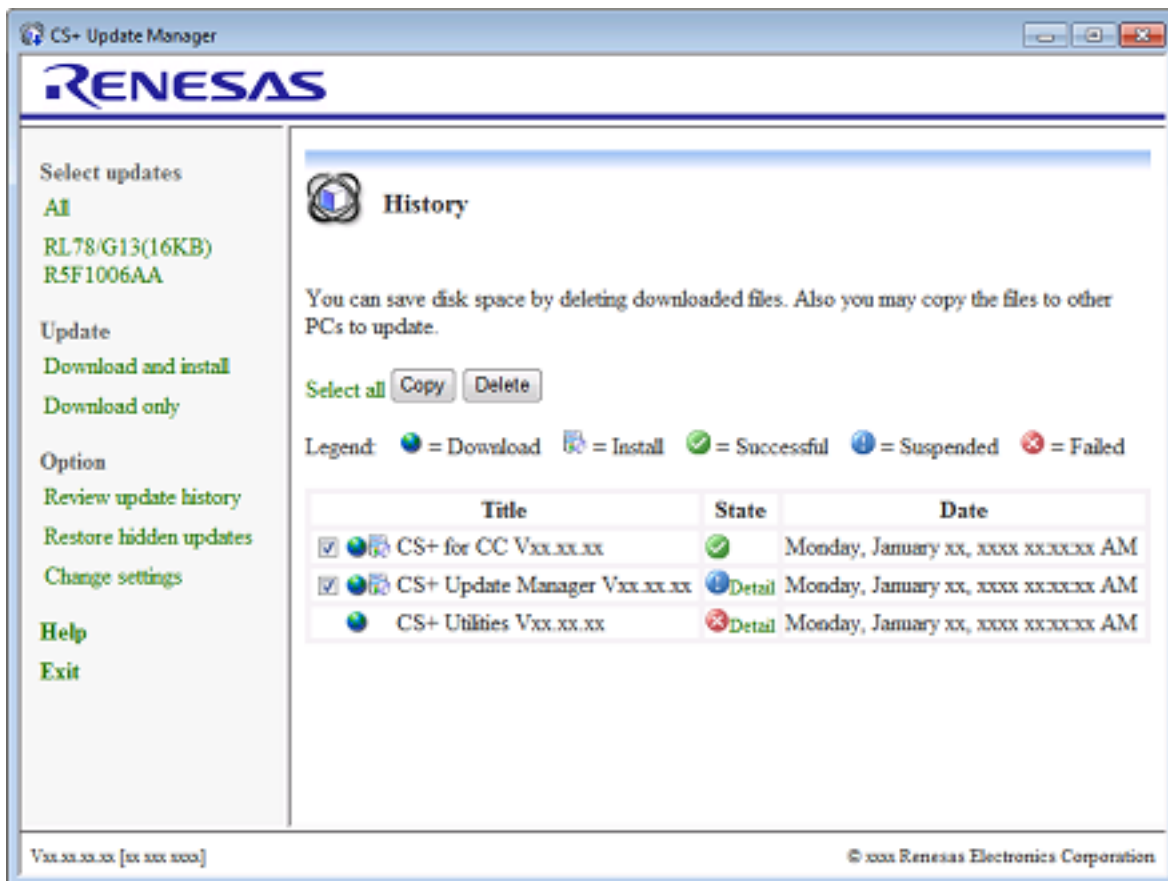


- (1) Installing download files  
This section describes how to install download files.
- (a) Select download files.  
Select the check boxes of download files in the [History page](#), and click the [Copy] button.

Figure 2.16 History Page

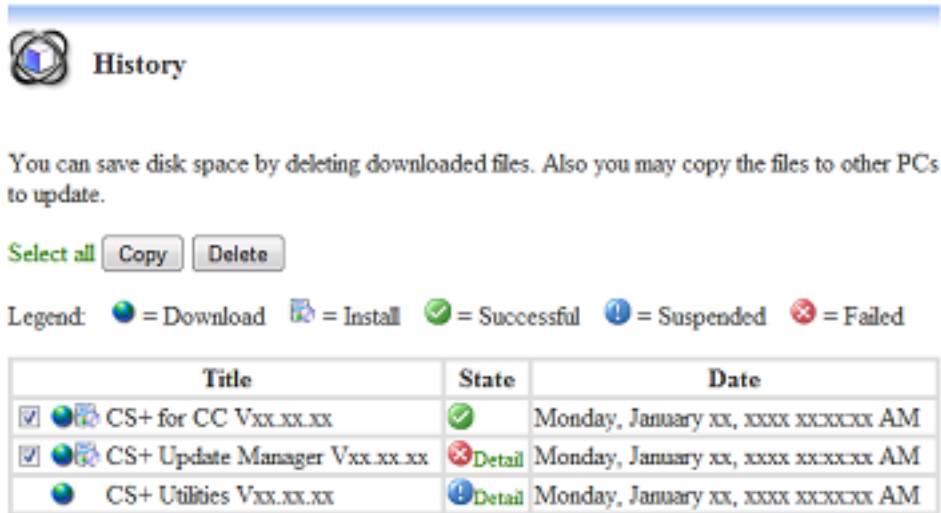

- (b) Select a copy destination folder.  
The Browse For Folder dialog box appears.

Figure 2.17 Browse For Folder Dialog Box

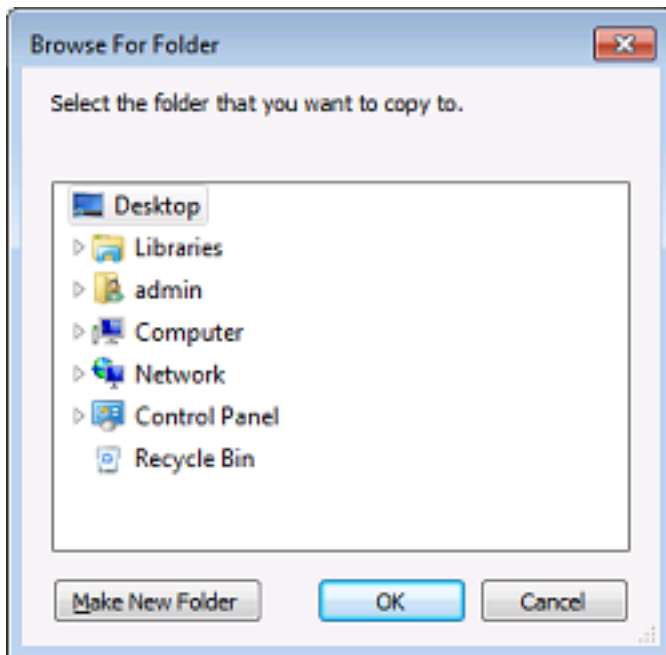


Select a copy destination folder, and click the [OK] button.

- (c) Confirm the copy destination folder and install.  
The download files are copied to the specified folder.  
Open the folder in Explorer, and install by double-clicking the copied files.


- (2) Deleting download files
- (a) Select download files.  
Select the check boxes of download files in the [History page](#), and click the [Delete] button.

Figure 2.18 History Page

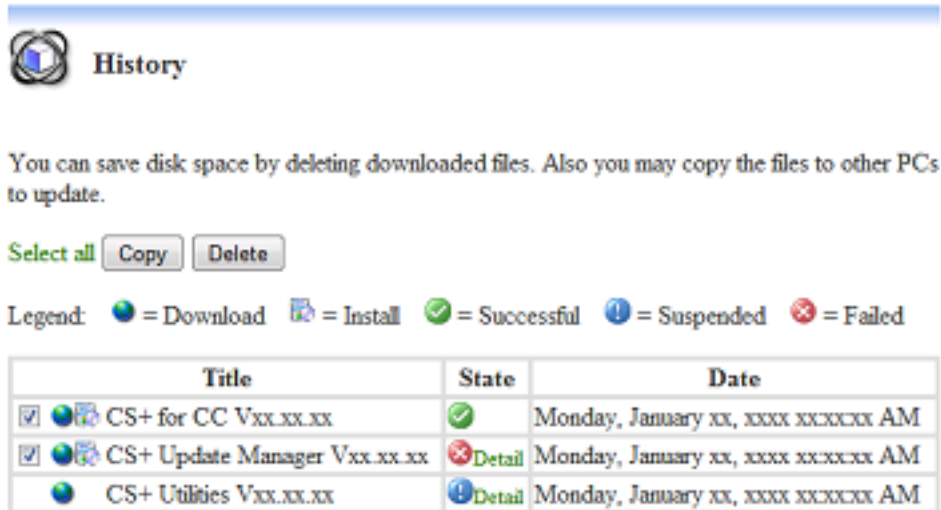

- (b) Confirm whether you want to delete download files and delete them.  
A Message dialog box asks whether you want to delete download files.

Figure 2.19 Message Dialog Box

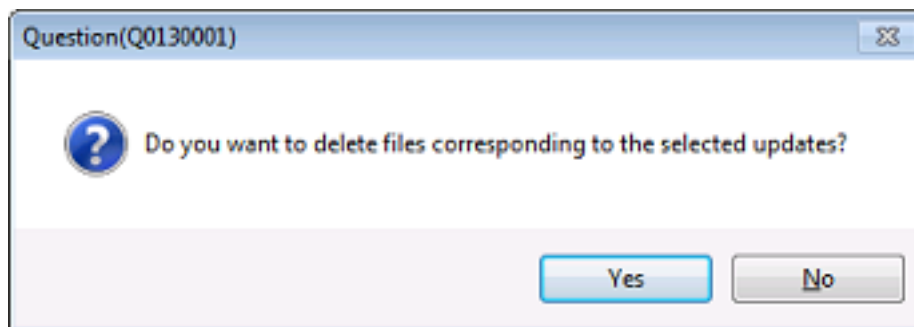


If you click the [Yes] button, the download files are deleted.

## 2.6 Restoring hidden updates

In the menu area of the [CS+ Update Manager window](#), select [Restore hidden updates] to display the [Restore hidden updates page](#).


From this page, you can display the updates that were hidden on the [Select updates page](#).

Figure 2.20 Restore hidden updates Page

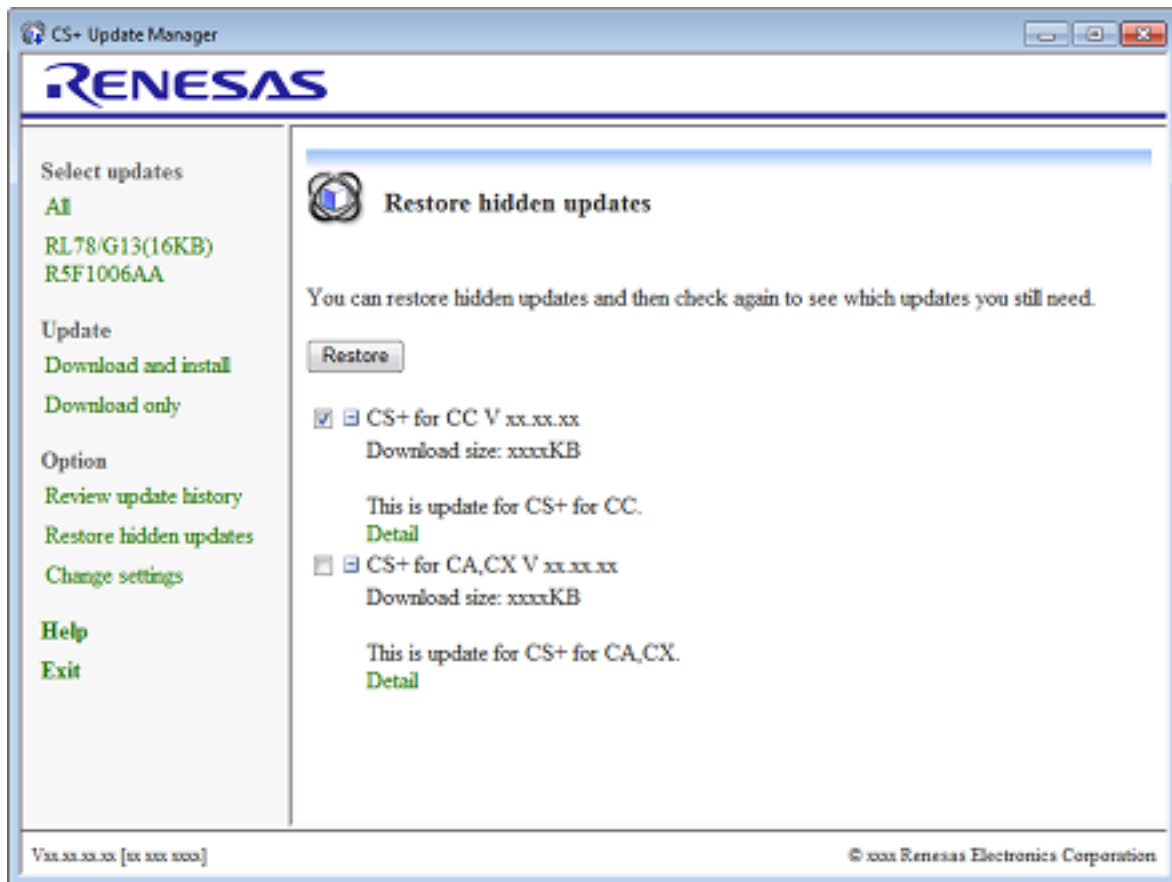

- (1) Select updates.  
Select the check boxes of updates in the [Restore hidden updates page](#), and click the [Restore] button.

Figure 2.21 Restore hidden updates Page

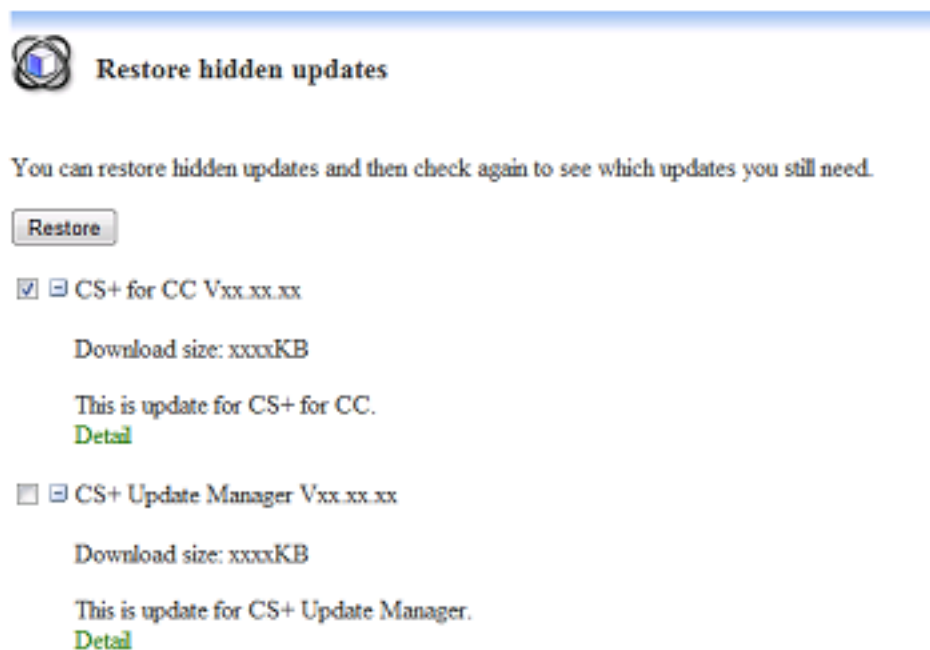

## A. WINDOW REFERENCE

This section describes the windows and dialog boxes related to updates.

### A.1 Description

Below is a list of the windows and dialog boxes related to updates.


Table A.1 Window/Dialog Box List

Window/Dialog Box Name	Function Description
<a href="#">CS+ Update Manager window</a>	This window displays the status of and controls the update function.
<a href="#">Software License Agreement Dialog Box</a>	This dialog box displays the license agreements for selected updates.
<a href="#">Update in progress dialog box</a>	This dialog box displays the progress of update download and installation.
<a href="#">Update Manager Options dialog box</a>	This dialog box displays and changes the Update Manager options.

## CS+ Update Manager window

This window displays the status of and controls the update function.


Figure A.1 CS+ Update Manager Window

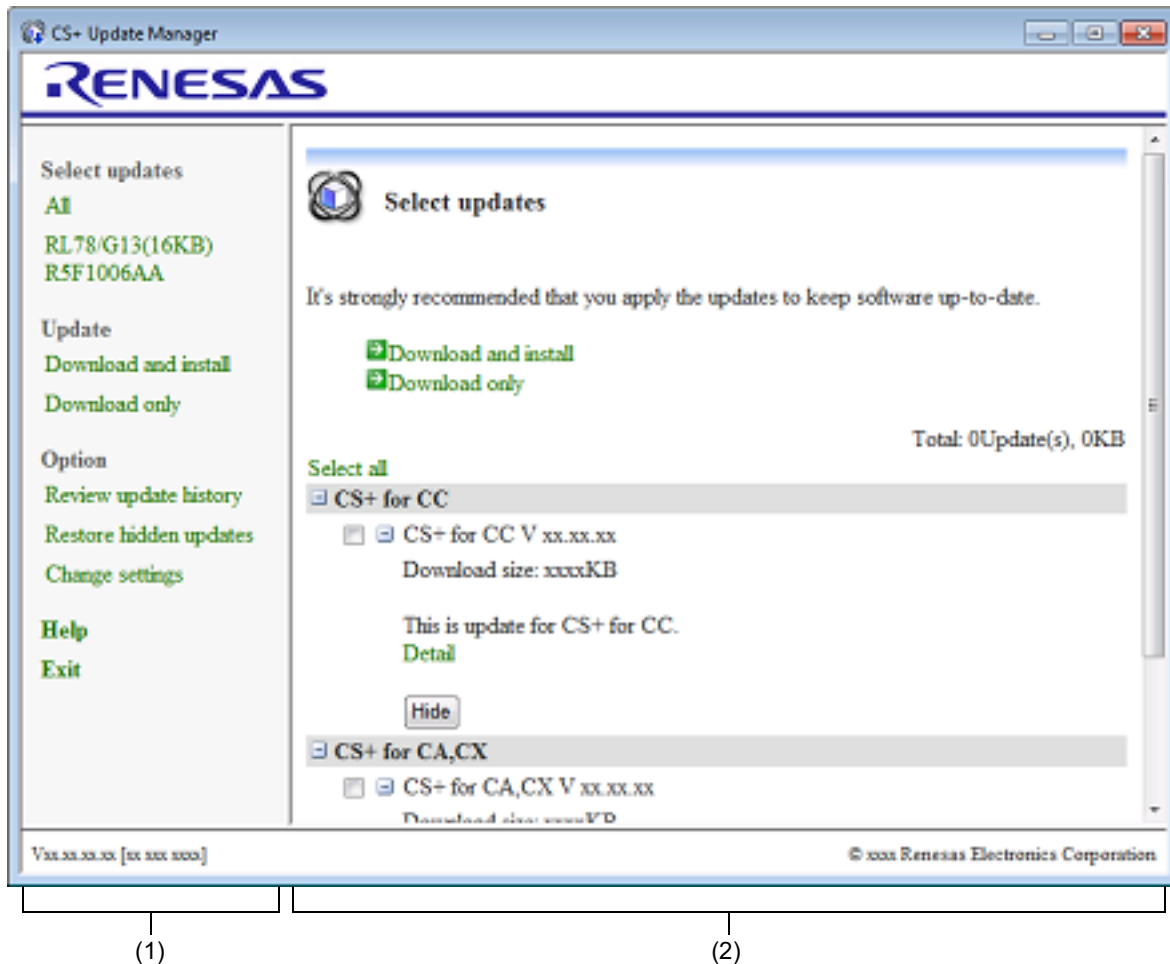

The following items are explained here.

- [\[How to open\]](#)
- [\[Description of each area\]](#)

### [How to open]

- From the Windows [Start] menu, select [Programs] >> [Renesas Electronics CS+] >> [Update Manager].  
 Remark In Windows 8.1, click on [Update Manager] on the start screen.
- In the Windows task tray, click the  or balloon help (i).
- From the CS+ [Help] menu, select [Check for Updates...].
- From the Create Project dialog box of the CS+, click the [Update...] button.

## [Description of each area]

## (1) Menu area

This area displays a menu for changing the appearance and settings of the main area. Select an item to perform the corresponding action.

All	Displays the updates.
<i>Microcontroller Name</i>	Displays the updates corresponding to that microcontroller. (Displays up to five microcontrollers for which the specify microcontroller function was used, most recent first.)
Download and install	Downloads the selected updates, and after the downloads are complete, install them.
Download only	Downloads the selected updates only.
Review update history	Displays the update history.
Restore hidden updates	Displays the Restore hidden updates page.
Change settings	Displays the <a href="#">Update Manager Options dialog box</a> .
Help	Displays help.
Exit	Exits Update Manager.

## (2) Main area


Switch the display to one of the following pages, in accordance with the active function.

- [Select updates page](#)
- [Download and install page](#)
- [Download only page](#)
- [Finish page](#)
- [History page](#)
- [Restore hidden updates page](#)
- [Error page](#)

## Select updates page

This page displays a list of available updates. Select updates to download and install.

Figure A.2 Select updates Page

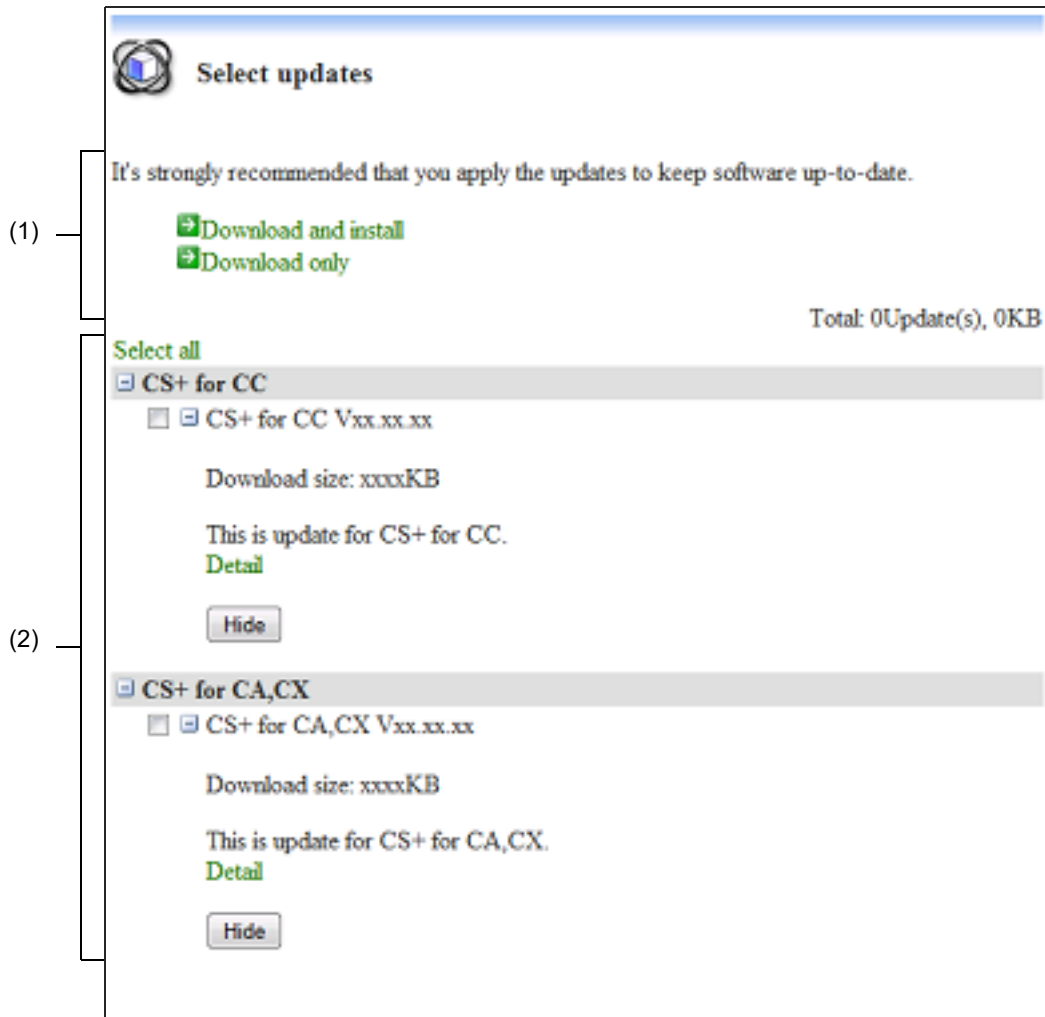

The following items are explained here.

- [\[How to open\]](#)
- [\[Description of each area\]](#)

### [How to open]

- From the [CS+ Update Manager window](#) menu area, click [\[All\]](#).
- From the [CS+ Update Manager window](#) menu area, click [\[Microcontroller Name\]](#).

### [Description of each area]

- (1) Select updates area  
If a microcontroller was specified, the microcontroller name appears.

Download and install	Downloads the selected updates, and after the downloads are complete, install them.
Download only	Downloads the selected updates only.

- (2) Update selection area  
Displays a list of items to update.  
Click [Select all] to select the check boxes of all updates.  
The following information is displayed for each update.


Category	Displays the category of the update. Available updates are listed under each category.
Title	Displays the title of the update.
Download size	Displays the download size of the update.
Summary	Displays a summary of the update information.
Detail	This appears if there is detailed information about the update. Selecting it will display details in a browser.

- (a) Button [Hide]  
If an update is selected in the Update Selection area, it is completely hidden.

## Download and install page

This page displays a list of selected updates, and starts the download and installation process.

Figure A.3 Download and install Page

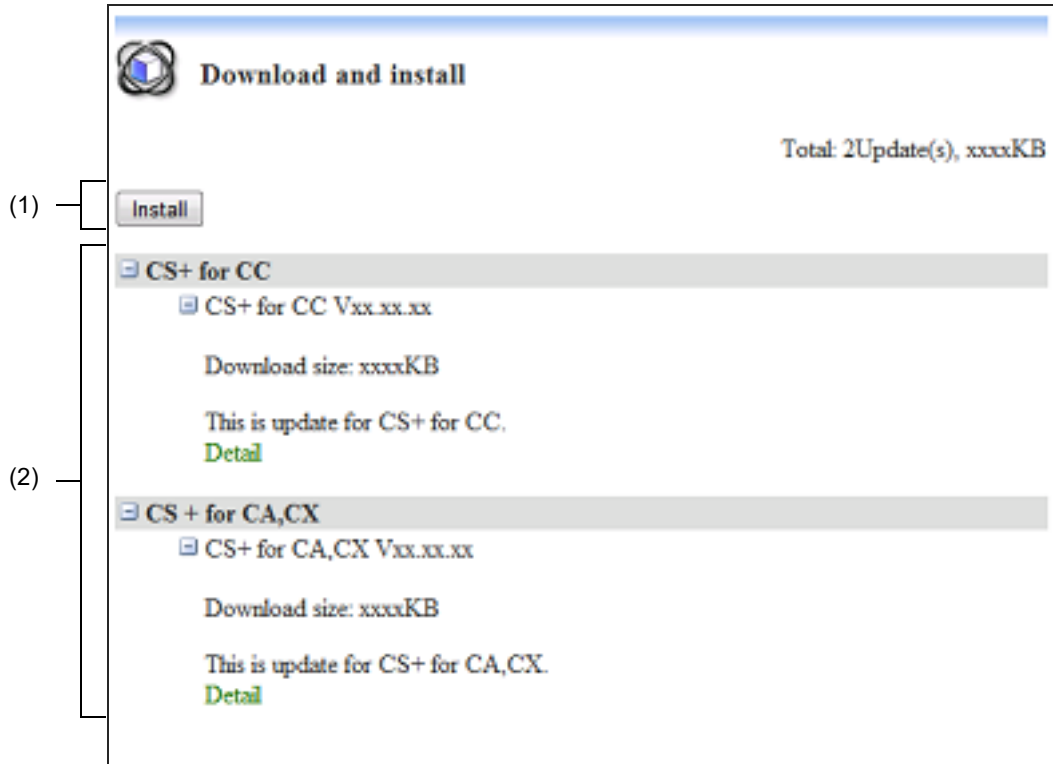

The following items are explained here.

- [\[How to open\]](#)
- [\[Description of each area\]](#)

### [How to open]

- From the [CS+ Update Manager window](#) menu area, click [Download and install].
- From the [Select updates page](#) main area, click [Download and install].

### [Description of each area]

- (1) Button [Install]  
 Begins the download and installation process.  
 This button is disabled if no updates are selected.

**Caution** If there are licenses you must accept in order to install, the [Software License Agreement Dialog Box](#) appears.

**Caution** If an emulator USB driver is installed, the confirmation dialog box may appear.

- (2) Update Selection area  
 Displays a list of items to update.  
 The following information is displayed for each update.


Category	Displays the category of the update. Updates with the same category are displayed together.
Title	Displays the title of the update.

Download size	Displays the download size of the update.
Summary	Displays a summary of the update information.
Detail	This appears if there is detailed information about the update. Selecting it will display details in a browser.

## Download only page

This page displays a list of selected updates, and starts the download process.

Figure A.4 Download only Page

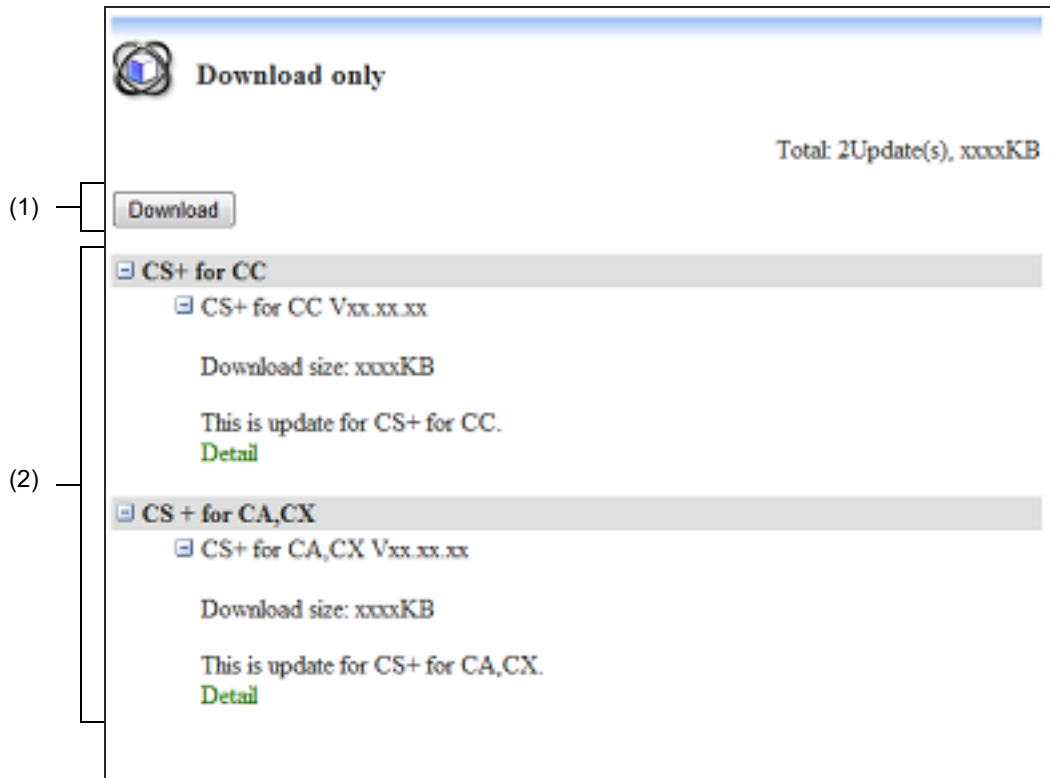

The following items are explained here.

- [\[How to open\]](#)
- [\[Description of each area\]](#)

### [How to open]

- From the [CS+ Update Manager window](#) menu area, click [Download only].
- From the [Select updates page](#) main area, click [Download only].

### [Description of each area]

- (1) Button [Download]  
Begins the download.  
This button is disabled if no updates are selected.
- (2) Update Selection area  
Displays a list of items to update.  
The following information is displayed for each update.


Category	Displays the category of the update. Updates with the same category are displayed together.
Title	Displays the title of the update.
Download size	Displays the download size of the update.
Summary	Displays a summary of the update information.

Detail	This appears if there is detailed information about the update. Selecting it will display details in a browser.
--------	---

## Finish page

This page displays lists of successful, canceled, and failed updates.

Figure A.5 Finish Page

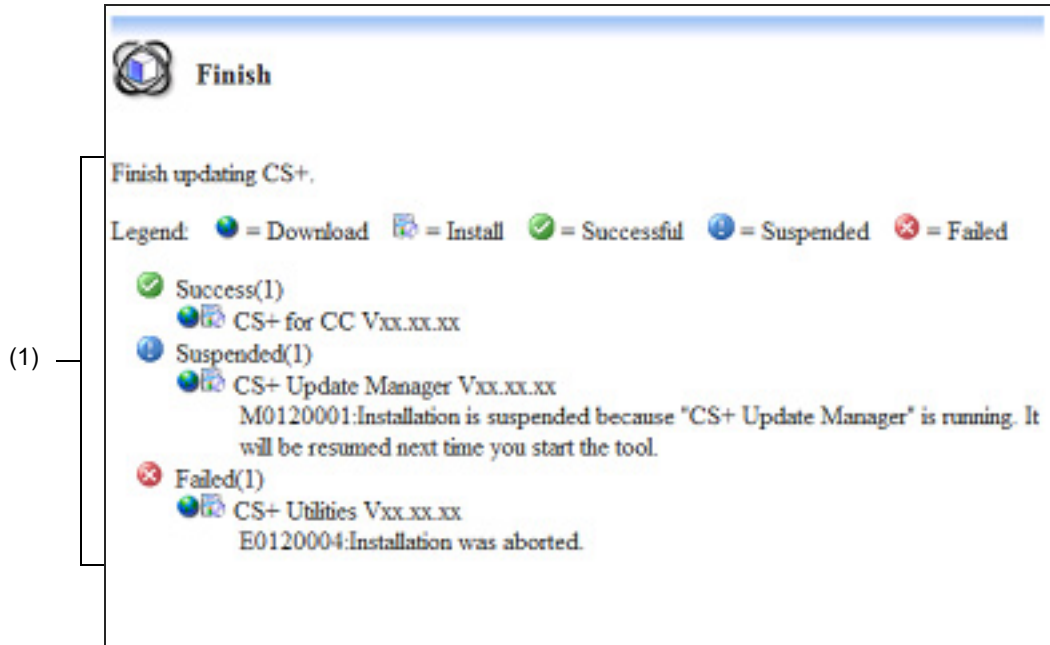

The following items are explained here.

- [\[How to open\]](#)
- [\[Description of each area\]](#)

### [How to open]

- Opens automatically when the update completes.

### [Description of each area]


- (1) Update Results area  
Displays a list of update results.

	Displays number of successful updates and update titles.
	Displays number of canceled updates, update titles, and messages.
	Displays number of failed updates, update titles, and messages.

## History page

Use this page to display the history of updates performed, and to copy or delete update files.

Figure A.6 History Page

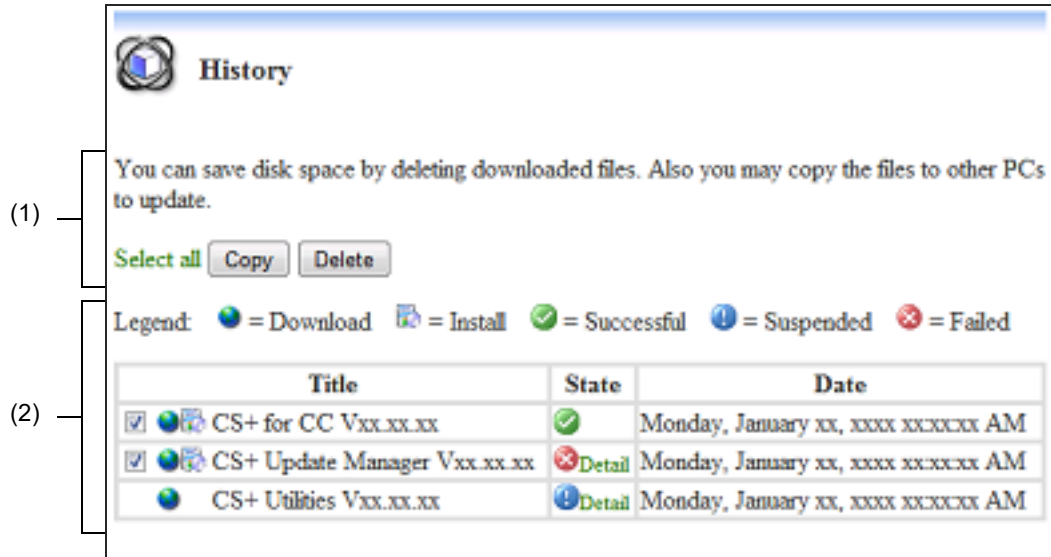

The following items are explained here.

- [\[How to open\]](#)
- [\[Description of each area\]](#)

### [How to open]

- From the [CS+ Update Manager window](#) menu area, click [\[Review update history\]](#).

### [Description of each area]

(1) Behavior Selection area

Select all	Selects all the check boxes in the Update History Display area.
Copy	Copies the selected updates to the specified folder.
Delete	Deletes the selected updates.

(2) Update History Display area


Displays a history of updates performed.

In the status column of the list, click [\[Detail\]](#) to display a message dialog box with a message corresponding to the results of the selected update.

## Restore hidden updates page

Use this page to display a list of updates hidden in the [Select updates page](#), restore the visibility of the selected updates, and enable that update to be checked and installed again.

Figure A.7 Restore hidden updates Page

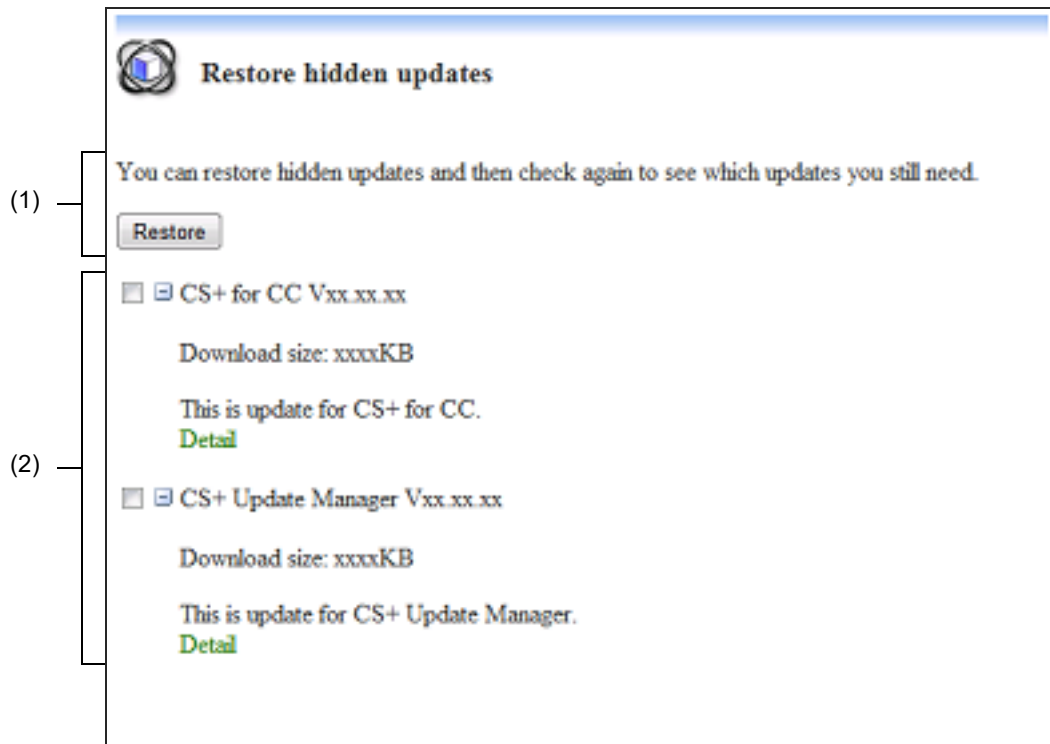

The following items are explained here.

- [\[How to open\]](#)
- [\[Description of each area\]](#)

### [How to open]

- From the [CS+ Update Manager window](#) menu area, click [\[Restore hidden updates\]](#).

### [Description of each area]

- (1) Button [\[Restore\]](#)  
The selected updates become visible, enabling them to be re-checked and installed.
- (2) Hidden Updates Display area  
Displays a list of updates that were hidden via the [Select updates page](#).

---

## Error page

---

This page appears when acquisition of update information fails.

Figure A.8 Error Page



The following items are explained here.

- [\[How to open\]](#)
- [\[Description of each area\]](#)

### [How to open]

- Opens automatically when acquisition of update information fails.


### [Description of each area]

- (1) Message area  
Displays a message that the acquisition of update information fails.
- (2) Button [Retry]  
Re-acquires update information.

## Software License Agreement Dialog Box

This dialog box displays the license agreements for selected updates.

Figure A.9 Software License Agreement Dialog Box

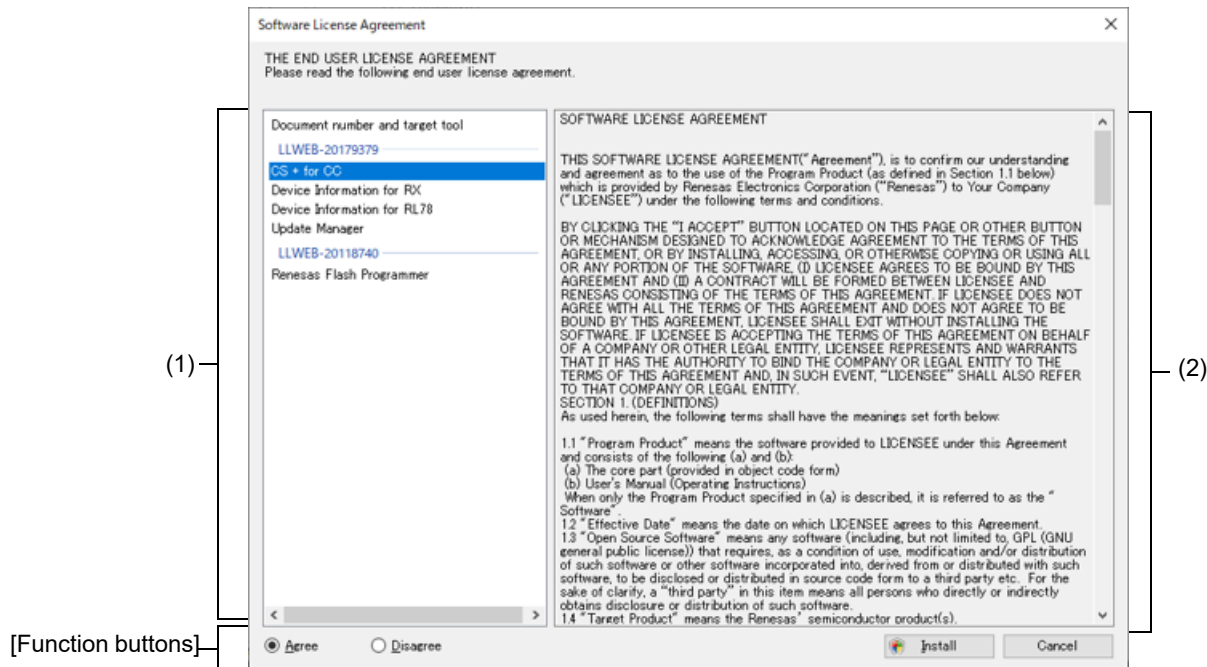

The following items are explained here.

- [How to open]
- [Description of each area]
- [Function buttons]

### [How to open]

- Click on the [Install] button on the [Download and install page](#).

### [Description of each area]

- (1) [List of license agreements] area  
This area displays a list of document numbers and tool names for license agreements which have been selected from among updates on the [Select updates page](#) and require agreement before installation.
- (2) [Text of license agreement] area  
This area displays the text of a license agreement that corresponds to a tool name which has been selected in the [List of license agreements] area.

### [Function buttons]


Radio button	Function
Agree	Agrees with a license agreement displayed in the [List of license agreements] area and enables the [Install] button.
Disagree	Disables the [Install] button.

Button	Function
Install	Starts installation after agreement with a license agreement.
Cancel	Cancels updating.

**Update in progress dialog box**

This dialog box displays the progress of update download and installation.

Figure A.10 Update in progress Dialog Box

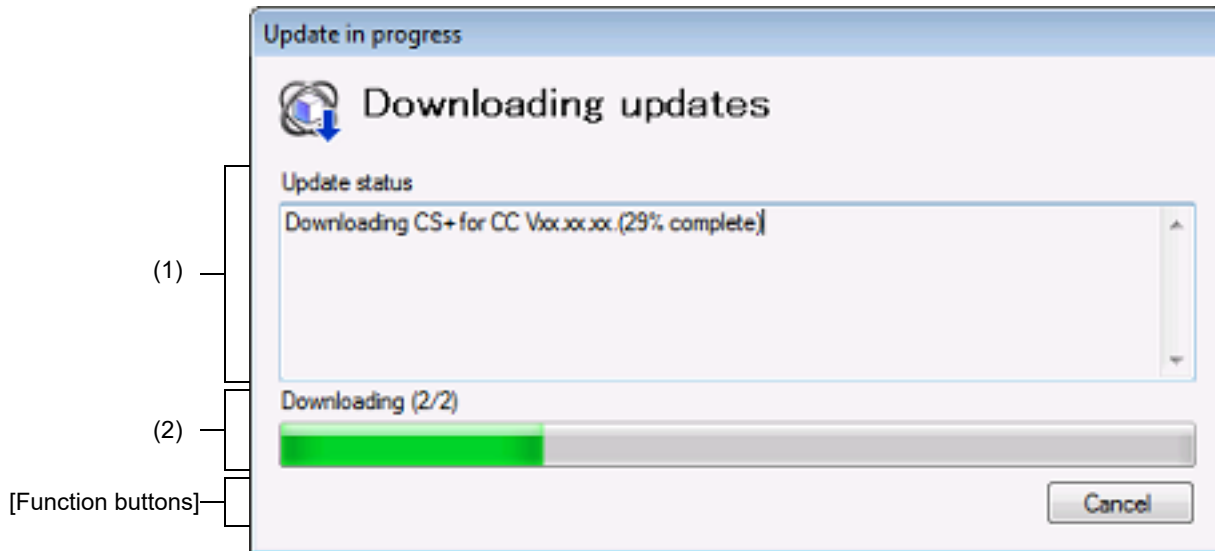

The following items are explained here.

- [How to open]
- [Description of each area]
- [Function buttons]

**[How to open]**

- Opens automatically while downloading and installing updates.

**[Description of each area]**

- (1) [Update status] area  
This area displays the current status of downloads and installs.  
It automatically closes when the updates are downloaded and installed.
- (2) [Downloading/Installing] area  
Displays the proportion of the size of target downloads that is complete.  
Displays the proportion of the number of target updates installed that is complete.


**[Function buttons]**

Button	Function
Cancel	Cancels the update.

## Update Manager Options dialog box

This dialog box displays and changes the Update Manager options.

Figure A.11 Update Manager Options Dialog Box

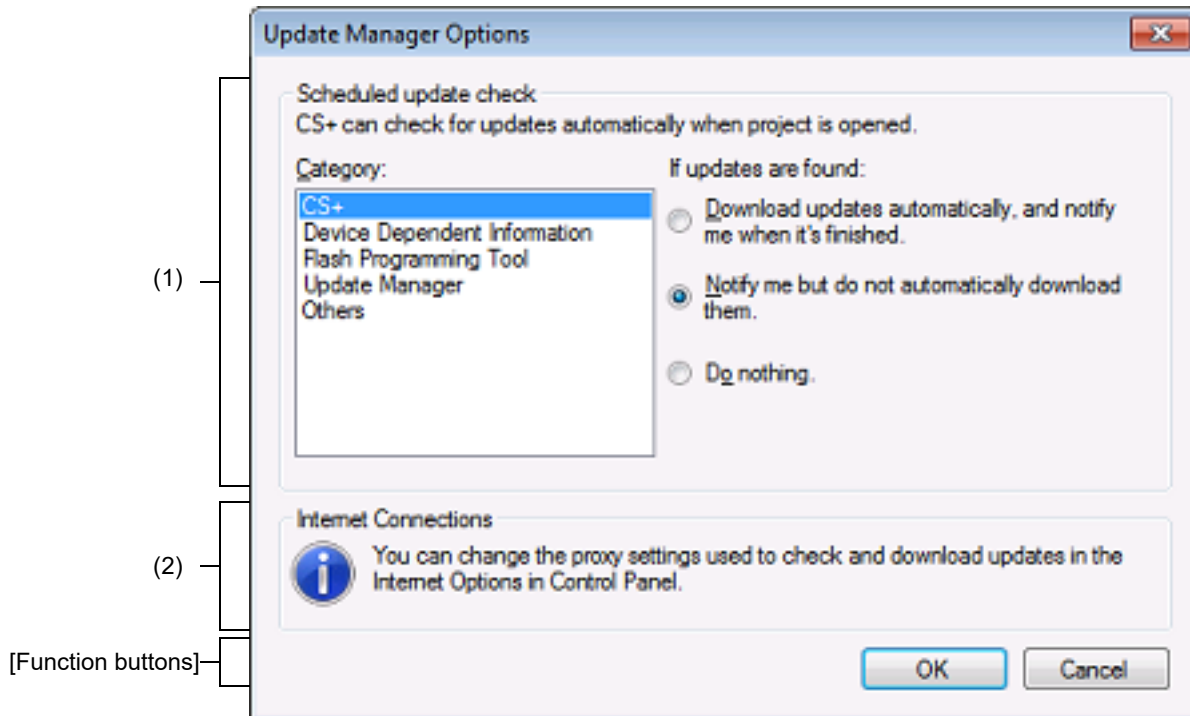

The following items are explained here.

- [How to open]
- [Description of each area]
- [Function buttons]

### [How to open]

- From the [CS+ Update Manager window](#) menu area, click [Change settings].

### [Description of each area]

(1) [Scheduled update check] area

(a) [Category]

Select the category of for which to configure the behavior for found updates.

(b) [If updates are found]

Set the behavior for found updates.

Select the action to perform for the selected category.

- [Download updates automatically, and notify me when it's finished.]  
If corresponding updates are found during periodic checks for updates, download them without asking for confirmation, and notify the user when the download is complete.
- [Notify me but do not automatically download them.]  
If corresponding updates are found during periodic checks for updates, notify the user.
- [Do nothing.]  
If corresponding updates are found during periodic checks for updates, do not notify the user.

- (2) [Internet Connections] area  
Describes the Internet connection.

[Function buttons]

Button	Function
OK	Finalizes the settings, reflects them, and closes the dialog box.
Cancel	Cancels any changes made to the settings, and closes the dialog box.

## Revision Record

Rev.	Date	Description	
		Page	Summary
1.00	Jun 01, 2025	-	First Edition issued

---

CS+ V8.14.00 User's Manual:  
Updater

Publication Date: Rev.1.00 Jun 01, 2025  
Published by: Renesas Electronics Corporation

---

CS+ V8.14.00