



Future Communications Integrated circuit Inc.

Product Data Sheet

FC9000

Brief Version of Datasheet

Date of Release: November 14, 2018

Version 1.3L

Contact information

For more information, please visit: <http://www.fci.co.kr>

For sales office addresses, please send an email to: fc_sales@fci.co.kr

All information provided in this document is subject to legal disclaimer. © FCI 2018. All rights reserved.

1. Device Overview

1.1. Introduction

The FC9000 is a highly integrated ultra-low power Wi-Fi system on a chip (SoC), which contains an 802.11b/g/n radio (PHY), a baseband processor, a media access controller (MAC), on-chip memory, and a host networking application processor, all on a single silicon die.

The SoC enables full offload capabilities, running the entire networking stack on chip so that no external network processor, CPU, or microcontroller is required, while many other SoCs optionally use a microcontroller.

FC9000 is a synthesis of breakthrough ultra low power technologies which enables extremely low power operation in the SoC. FC9000 shuts down every micro element of the chip that is not in use, which allows a near zero level of power consumption when not actively transmitting or receiving data. Such low power operation can extend the battery life as long as a year or more depending on the application. FC9000 also enables ultra low power transmitting and receiving modes when the SoC needs to be awake to exchange information with other devices. Advanced algorithms enable staying asleep until the exact moment required to wake up to transmit or receive.

The SoC is built from the ground up for the “Internet of Things” and is ideal for wearables, door locks, home appliances, sprinkler systems, thermostats, connected lighting, drop in video cameras and other devices that comprise the ConnectedHome.

1.2. Features

- Highly Integrated Ultra Low Power Wi-Fi® System On Chip
- Full Offload : SoC runs full Networking OS & TCP/IP Stack
- Wi-Fi Processor
 - IEEE 802.11b/g/n, 1x1 MIMO, 20MHz channel bandwidth, 2.4GHz
 - On-chip PA, LNA, and RF Switch
 - Wi-Fi Security (802.11i): WPA-Enterprise, WPA-Personal, WPA2-Enterprise, WPA2-Personal
 - Vendor EAP Types: EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1, EAP-FAST, EAP-TLS
 - Operating Modes: Station, SoftAP, and Wi-Fi Direct® Modes
 - WPS2 for Easy Wi-Fi Provisioning
 - Connection Manager for Autonomous and Fast Wi-Fi Connections
- CPU Core Subsystem
 - ARM Cortex-M0+ Core w/ Clock Frequency of 40~200MHz
 - Embedded Memory

All information provided in this document is subject to legal disclaimer © FCI 2018. All rights reserved.

- ROM : 192KBytes
- SRAM : 1664KBytes
- OTP : 16KBytes
- Hardware accelerators
 - General HW CRC Engine
 - HW Zeroing Function for Fast Booting
 - HW TCP Checksum
- Complete Software Stack
 - Comprehensive Networking Software Stack
 - Provides TCP/IP Stack : In the Form of Network Socket APIs(Application Programming Interfaces)
- Built-in Hardware Crypto Engines for Advanced Security
 - TLS/DTLS Security Protocol Functions
 - RSA Engine for Key Deliberate Generic Security Functions
- Built-in 4/2 Channel Auxiliary ADCs for Sensor Interfaces
 - 16-bit Sigma-Delta ADC : Differential 2 Channels
 - 12-bit SAR ADC : Single-Ended 4 Channels
 - Provides Dynamic Auto Switching Function
- Built-in Audio DAC
 - 16~22-bit Data Conversion
 - SNR : Min +95dB (A-Weighted, Line Out)
 - Supported Audio Sampling Rate : 8k/12k/16k/24k/32k/44.1k/48kHz
- Supports Various Interfaces
 - eMMC/SD Expanded Memory
 - SDIO Host/Slave Function
 - Quad-lane SPI for External Flash Control
 - 2 Universal Asynchronous Receivers and Transmitters(UARTs)
 - Serial Peripheral Interface(SPI) Master/Slave Interface
 - Inter-Integrated Circuit(I2C) Master/Slave Interface
 - I2S for Digital Audio Streaming
 - Pulse-Width Modulation(PWM)
 - Individually Programmable, Multiplexed GPIO Pins
 - JTAG
- Power Management Unit
 - On-Chip RTC (Real-time Clock)
 - Wake-up Control of Fast Booting or Full Booting with Minimal Initialization Time


All information provided in this document is subject to legal disclaimer © FCI 2018. All rights reserved.

- Integrated DCDCs and LDOs
- Supports Three Ultra Low Power Sleep Modes
- Clock Source
 - 40MHz Crystal (+/- 20ppm) for Master Clock (Initial + temp + aging)
 - 32.768kHz Crystal (+/- 250ppm) for RTC Clock
 - Integrated 32kHz RC Oscillator
- Supply
 - Single Operating Voltage : 3.0 ~ 3.6V(typical: 3.3V)
 - Digital I/O Supply Voltage : 1.8V / 3.3V
- Package
 - 7mm × 7mm, 0.4mm Pitch, 60-Pin, QFN
- Operating Temperature Range: –40°C to 85°C
- Wi-Fi Alliance certifications:
 - Wi-Fi CERTIFIED n
 - Wi-Fi Direct®
 - Wi-Fi Protected Setup™

1.3. Applications

Full Offload System-on-Chip for IoT Applications, such as:

- Security Systems
- Door Locks
- Thermostats
- Garage Door Openers
- Blinds
- Lighting Control
- Sprinkler Systems
- Video Camera Security Systems
- Smart Appliances

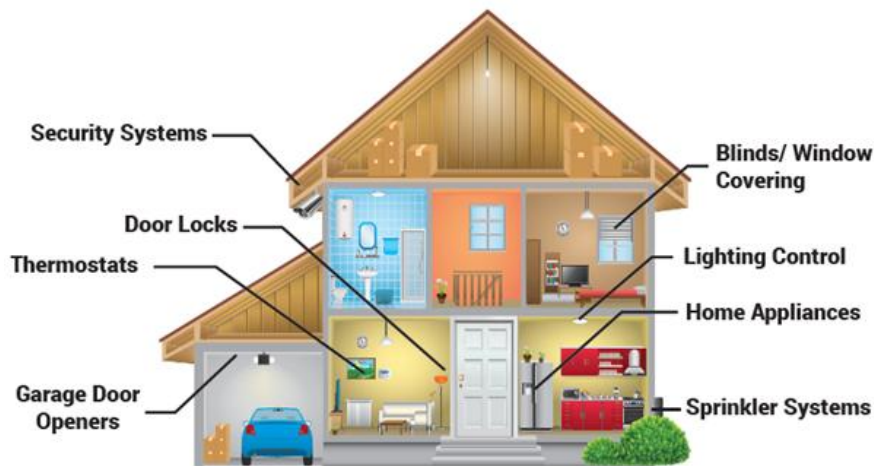

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01 Jan 2024)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.