

**OBSOLETE PRODUCT
NO RECOMMENDED REPLACEMENT**
contact our Technical Support Center at
1-888-INTERSIL or www.intersil.com/tsc

Wideband, High Impedance Operational Amplifier

October 2004

Features

- This Circuit is Processed in Accordance to MIL-STD-883 and is Fully Conformant Under the Provisions of Paragraph 1.2.1.
- High Input Impedance **40M Ω (Min)**
500M Ω (Typ)
- High Slew Rate..... **4V/ μ s (Min)**
7V/ μ s (Typ)
- Low Input Bias Current **25nA (Max)**
1nA (Typ)
- Low Input Offset Current..... **5mV (Max)**
- Wide Unity Gain Bandwidth **12MHz (Typ)**
- Output Short Circuit Protection

Applications

- Video Amplifier
- Pulse Amplifier
- High-Q Active Filters
- High Speed Comparators
- Low Distortion Oscillators


Description

The HA-2602/883 is an internally compensated bipolar operational amplifier that features very high input impedance coupled with wideband AC performance. The high resistance of the input stage is complemented by low offset voltage (5mV max at +25°C) and low bias and offset current (25nA max at +25°C) to facilitate accurate signal processing. Offset voltage can be reduced further by means of an external nulling potentiometer. The 4V/ μ s minimum slew rate at +25°C and the minimum open loop gain of 80kV/V at +25°C enables the HA-2602/883 to perform high gain amplification of fast, wideband signals. These dynamic characteristics, coupled with fast settling times, make these amplifiers ideally suited to pulse amplification designs as well as high frequency or video applications. The frequency response of the amplifier can be tailored to exact design requirements by means of an external bandwidth control capacitor. Other high performance designs such as high gain, low distortion audio amplifiers, high-Q and wideband active filters and high speed comparators, are excellent uses of this part.

Part Number Information

PART NUMBER	TEMPERATURE RANGE	PACKAGE
HA2-2602/883	-55°C to +125°C	8 Pin Can

Pinout

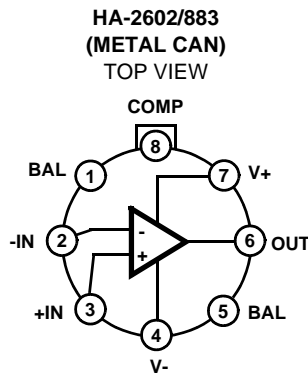

Absolute Maximum Ratings

Voltage Between V+ and V- Terminals 40V
 Differential Input Voltage 12V
 Voltage at Either Input Terminal V+ to V-
 Peak Output Current Full Short Circuit Protection
 Junction Temperature (T_J) +175°C
 Storage Temperature Range -65°C to +150°C
 ESD Rating <2000V
 Lead Temperature (Soldering 10s) +300°C

Thermal Information

Thermal Resistance θ_{JA} θ_{JC}
 Metal Can Package 160°C/W 75°C/W
 Package Power Dissipation Limit at +75°C for T_J ≤ +175°C
 Metal Can Package 625mW
 Package Power Dissipation Derating Factor Above +75°C
 Metal Can Package 6.3mW/°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

1. θ_{JA} is measured with the component mounted on a low effective thermal conductivity test board in free air. See Tech Brief TB379 for details.

Operating Conditions

Operating Temperature Range -55°C to +125°C $V_{INCM} \leq 1/2 (V+ - V-)$
 Operating Supply Voltage ±15V $R_L \geq 2k\Omega$

TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Tested at: V_{SUPPLY} = ±15V, R_{SOURCE} = 100Ω, R_{LOAD} = 500kΩ, V_{OUT} = 0V, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	HA-2602/883		UNITS
					MIN	MAX	
Input Offset Voltage	V _{IO}	V _{CM} = 0V	1	+25°C	-5	5	mV
			2, 3	+125°C, -55°C	-7	7	mV
Input Bias Current	+I _B	V _{CM} = 0V, +R _S = 100kΩ, -R _S = 100Ω	1	+25°C	-25	25	nA
			2, 3	+125°C, -55°C	-60	60	nA
	-I _B	V _{CM} = 0V, +R _S = 100Ω, -R _S = 100kΩ	1	+25°C	-25	25	nA
			2, 3	+125°C, -55°C	-60	60	nA
Input Offset Current	I _{IO}	V _{CM} = 0V, +R _S = 100kΩ, -R _S = 100kΩ	1	+25°C	-25	25	nA
			2, 3	+125°C, -55°C	-60	60	nA
Common Mode Range	+CMR	V+ = +4V, V- = -26V	1	+25°C	11	-	V
			2, 3	+125°C, -55°C	11	-	V
	-CMR	V+ = +26V, V- = -4V	1	+25°C	-	-11	V
			2, 3	+125°C, -55°C	-	-11	V
Large Signal Voltage Gain	+A _{VOL}	V _{OUT} = 0V and +10V, R _L = 2kΩ	4	+25°C	80	-	kV/V
			5, 6	+125°C, -55°C	60	-	kV/V
	-A _{VOL}	V _{OUT} = 0V and -10V, R _L = 2kΩ	4	+25°C	80	-	kV/V
			5, 6	+125°C, -55°C	60	-	kV/V
Common Mode Rejection Ratio	+CMRR	ΔV _{CM} = +10V, V+ = +5V, V- = -25V, V _{OUT} = -10V	1	+25°C	74	-	dB
			2, 3	+125°C, -55°C	74	-	dB
	-CMRR	ΔV _{CM} = -10V, V+ = +25V, V- = -5V, V _{OUT} = +10V	1	+25°C	74	-	dB
			2, 3	+125°C, -55°C	74	-	dB
Output Voltage Swing	+V _{OUT}	R _L = 2kΩ	4	+25°C	10	-	V
			5, 6	+125°C, -55°C	10	-	V
	-V _{OUT}	R _L = 2kΩ	4	+25°C	-	-10	V
			5, 6	+125°C, -55°C	-	-10	V

HA-2602/883

TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS (Continued)

Device Tested at: $V_{SUPPLY} = \pm 15V$, $R_{SOURCE} = 100\Omega$, $R_{LOAD} = 500k\Omega$, $V_{OUT} = 0V$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	HA-2602/883		UNITS
					MIN	MAX	
Output Current	+I _{OUT}	V _{OUT} = -10V	4	+25°C	10	-	mA
			5, 6	+125°C, -55°C	7.5	-	mA
	-I _{OUT}	V _{OUT} = +10V	4	+25°C	-	-10	mA
			5, 6	+125°C, -55°C	-	-7.5	mA
Quiescent Power Supply Current	+I _{CC}	V _{OUT} = 0V, I _{OUT} = 0mA	1	+25°C	-	3.7	mA
			2, 3	+125°C, -55°C	-	4.0	mA
	-I _{CC}	V _{OUT} = 0V, I _{OUT} = 0mA	1	+25°C	-3.7	-	mA
			2, 3	+125°C, -55°C	-4.0	-	mA
Power Supply Rejection Ratio	+PSRR	$\Delta V_{SUP} = \pm 5V$, V+ = +10V, V- = -15V, V+ = +20V, V- = -15V	1	+25°C	74	-	dB
			2, 3	+125°C, -55°C	74	-	dB
	-PSRR	$\Delta V_{SUP} = \pm 5V$, V+ = +15V, V- = -10V, V+ = +15V, V- = -20V	1	+25°C	74	-	dB
			2, 3	+125°C, -55°C	74	-	dB
Offset Voltage Adjustment	+V _{IOAdj}	Note 1	1	+25°C	V _{IO} -1	-	mV
			2, 3	+125°C, -55°C	V _{IO} -1	-	mV
	-V _{IOAdj}	Note 1	1	+25°C	V _{IO} +1	-	mV
			2, 3	+125°C, -55°C	V _{IO} +1	-	mV

NOTE:

- Offset adjustment range is [V_{IO}(Measured) ±1mV] minimum referred to output. This test is for functionality only to assure adjustment through 0V.

TABLE 2. AC ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Tested at: $V_{SUPPLY} = \pm 15V$, $R_{SOURCE} = 50\Omega$, $R_{LOAD} = 2k\Omega$, $C_{LOAD} = 50pF$, $A_{VCL} = +1V/V$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	HA-2602/883		UNITS
					MIN	MAX	
Slew Rate	+SR	V _{OUT} = -5V to +5V	7	+25°C	4	-	V/μs
			8A, 8B	+125°C, -55°C	3	-	V/μs
	-SR	V _{OUT} = +5V to -5V	7	+25°C	4	-	V/μs
			8A, 8B	+125°C, -55°C	3	-	V/μs
Rise and Fall Time	T _R	V _{OUT} = 0 to +200mV, 10% ≤ T _R ≤ 90%	7	+25°C	-	60	ns
			8A, 8B	+125°C, -55°C	-	70	ns
	T _F	V _{OUT} = 0 to -200mV, 10% ≤ T _F ≤ 90%	7	+25°C	-	60	ns
			8A, 8B	+125°C, -55°C	-	70	ns

HA-2602/883

TABLE 2. AC ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Tested at: $V_{SUPPLY} = \pm 15V$, $R_{SOURCE} = 50\Omega$, $R_{LOAD} = 2k\Omega$, $C_{LOAD} = 50pF$, $A_{VCL} = +1V/V$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	HA-2602/883		UNITS
					MIN	MAX	
Overshoot	+OS	$V_{OUT} = 0$ to $+200mV$	7	$+25^{\circ}C$	-	40	%
			8A, 8B	$+125^{\circ}C, -55^{\circ}C$	-	50	%
	-OS	$V_{OUT} = 0$ to $-200mV$	7	$+25^{\circ}C$	-	40	%
			8A, 8B	$+125^{\circ}C, -55^{\circ}C$	-	50	%

TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Characterized at: $V_{SUPPLY} = \pm 15V$, $R_{LOAD} = 2k\Omega$, $C_{LOAD} = 50pF$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	NOTES	TEMPERATURE	HA-2602/883		UNITS
					MIN	MAX	
Differential Input Resistance	R_{IN}	$V_{CM} = 0V$	1	$+25^{\circ}C$	40	-	$M\Omega$
Full Power Bandwidth	FPBW	$V_{PEAK} = 10V$	1, 2	$+25^{\circ}C$	50	-	kHz
Minimum Closed Loop Stable Gain	CLSG	$R_L = 2k\Omega, C_L = 50pF$	1	$-55^{\circ}C$ to $+125^{\circ}C$	1	-	V/V
Output Short Circuit Current	+ I_{SC}	$V_{OUT} = 1V, R_L = 10\Omega$	1	$+25^{\circ}C$	-	50	mA
			1	$+125^{\circ}C$	-	45	mA
			1	$-55^{\circ}C$	-	60	mA
	- I_{SC}	$V_{OUT} = -1V, R_L = 10\Omega$	1	$+25^{\circ}C$	-50	-	mA
			1	$+125^{\circ}C$	-45	-	mA
			1	$-55^{\circ}C$	-60	-	mA

NOTES:

- Parameters listed in Table 3 are controlled via design or process parameters and are not directly tested at final production. These parameters are lab characterized upon initial design release, or upon design changes. These parameters are guaranteed by characterization based upon data from multiple production runs which reflect lot to lot and within lot variation.
- Full Power Bandwidth guarantee based on Slew Rate measurement using $FPBW = \text{Slew Rate}/(2\pi V_{PEAK})$.
- Quiescent Power Consumption based upon Quiescent Supply Current test maximum. (No load on outputs.)

TABLE 4. ELECTRICAL TEST REQUIREMENTS

MIL-STD-883 TEST REQUIREMENTS	SUBGROUPS (SEE TABLES 1 AND 2)
Interim Electrical Parameters (Pre Burn-In)	1
Final Electrical Test Parameters	1 (Note 1), 2, 3, 4, 5, 6, 7, 8A, 8B
Group A Test Requirements	1, 2, 3, 4, 5, 6, 7, 8A, 8B
Groups C and D Endpoints	1

NOTE:

- PDA applies to Subgroup 1 only.

HA-2602/883

Die Characteristics

DIE DIMENSIONS:

69 x 56 x 19 mils \pm 1 mils
1750 x 1420 x 483 μ m \pm 25.4 μ m

METALLIZATION:

Type: Al, 1% Cu
Thickness: 16k \AA \pm 2k \AA

GLASSIVATION:

Type: Nitride (Si₃N₄) over Silox (SiO₂, 5% Phos.)

Silox Thickness: 12k \AA \pm 2k \AA
Nitride Thickness: 3.5k \AA \pm 1.5k \AA

WORST CASE CURRENT DENSITY:


3.9 x 10⁴ A/cm²

SUBSTRATE POTENTIAL (Powered Up): Unbiased

TRANSISTOR COUNT:

HA-2602/883: 140

Metallization Mask Layout

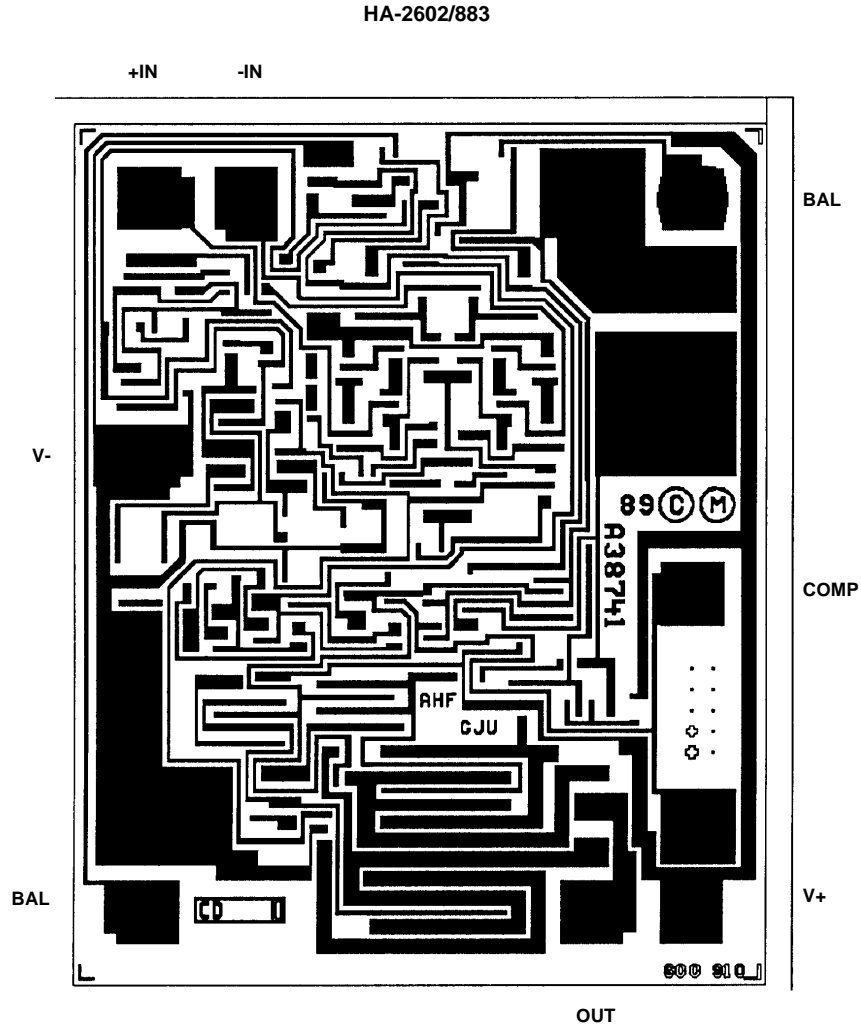

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.
Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com