

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

NPN SILICON RF TRANSISTOR 2SC5433

Phase-out/Discontinued

NPN EPITAXIAL SILICON TRANSISTOR FOR HIGH-FREQUENCY LOW-NOISE AMPLIFICATION FLAT-LEAD 3-PIN THIN-TYPE ULTRA SUPER MINIMOLD

FEATURES

- Contains same chip as 2SC5007
- Flat-lead 3-pin thin-type ultra super minimold package

★ ORDERING INFORMATION

Part Number	Quantity	Supplying Form
2SC5433	50 pcs (Non reel)	• 8 mm wide embossed taping
2SC5433-T1	3 kpcs/reel	• Pin 3 (collector) face the perforation side of the tape

Remark To order evaluation samples, contact your nearby sales office.
The unit sample quantity is 50 pcs.

ABSOLUTE MAXIMUM RATINGS (T_A = +25°C)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	V _{CBO}	20	V
Collector to Emitter Voltage	V _{CEO}	10	V
Emitter to Base Voltage	V _{EBO}	1.5	V
Collector Current	I _C	65	mA
Total Power Dissipation	P _{tot} ^{Note}	125	mW
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-65 to +150	°C

Note Free air

Because this product uses high-frequency technology, avoid excessive static electricity, etc.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local NEC Compound Semiconductor Devices representative for availability and additional information.

ELECTRICAL CHARACTERISTICS (T_A = +25°C)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Collector Cut-off Current	I _{CBO}	V _{CB} = 10 V, I _E = 0 mA	–	–	800	nA
Emitter Cut-off Current	I _{EBO}	V _{EB} = 1 V, I _C = 0 mA	–	–	800	nA
DC Current Gain	h _{FE} ^{Note 1}	V _{CE} = 3 V, I _C = 7 mA	80	–	145	–
Gain Bandwidth Product	f _T	V _{CE} = 3 V, I _C = 7 mA, f = 1 GHz	4.5	7.0	–	GHz
Insertion Power Gain	S _{21e} ²	V _{CE} = 3 V, I _C = 7 mA, f = 1 GHz	10.0	12.0	–	dB
Noise Figure	NF	V _{CE} = 3 V, I _C = 7 mA, f = 1 GHz	–	1.4	2.7	dB
Reverse Transfer Capacitance	C _{re} ^{Note 2}	V _{CB} = 3 V, I _E = 0 mA, f = 1 MHz	–	–	0.9	pF


- Notes** 1. Pulse measurement: PW ≤ 350 μs, Duty Cycle ≤ 2%
 2. Collector to base capacitance when the emitter grounded

h_{FE} CLASSIFICATION


Rank	EB	FB
Marking	TE	TF
h _{FE} Value	80 to 110	100 to 145

TYPICAL CHARACTERISTICS (Unless otherwise specified, $T_A = +25^\circ\text{C}$)


TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

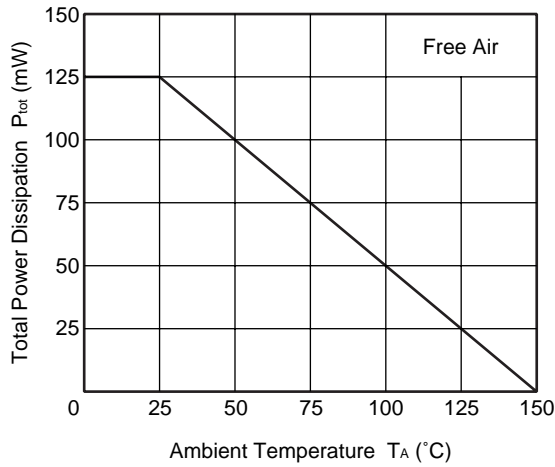


REVERSE TRANSFER CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

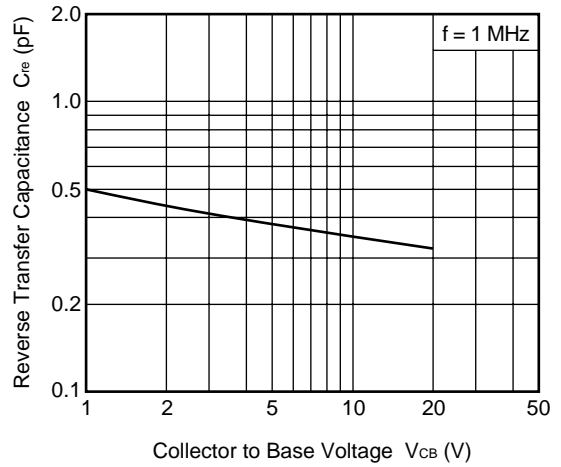


COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

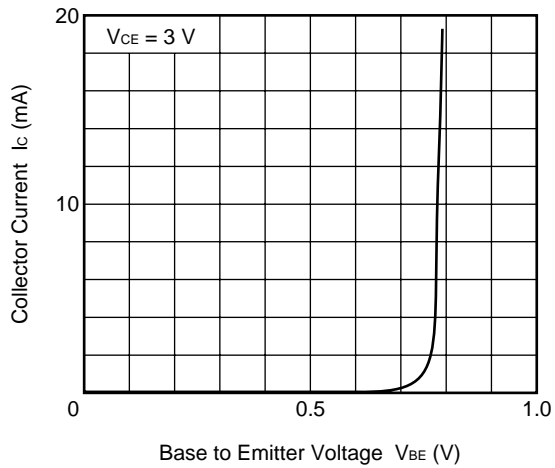


COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

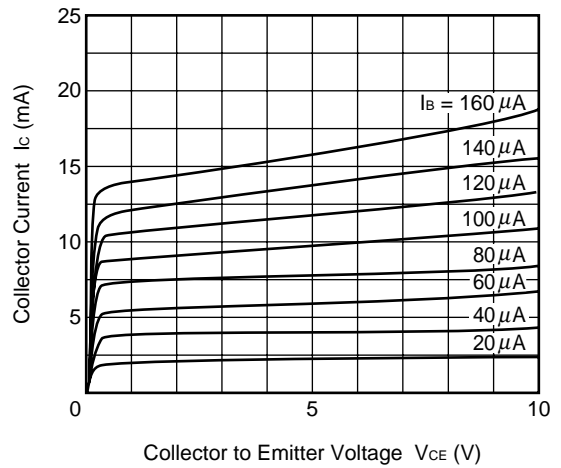


DC CURRENT GAIN vs. COLLECTOR CURRENT

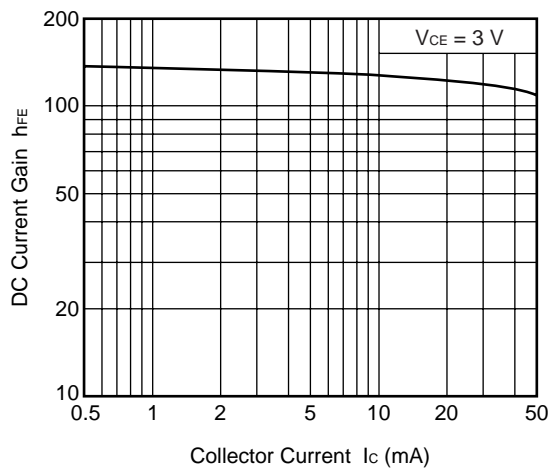


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

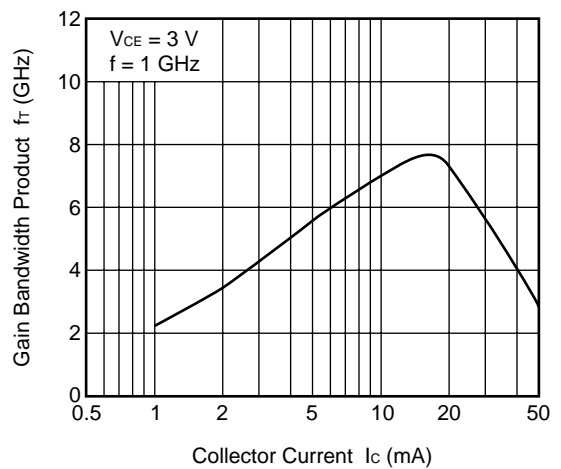


INSERTION POWER GAIN, MAG vs. FREQUENCY

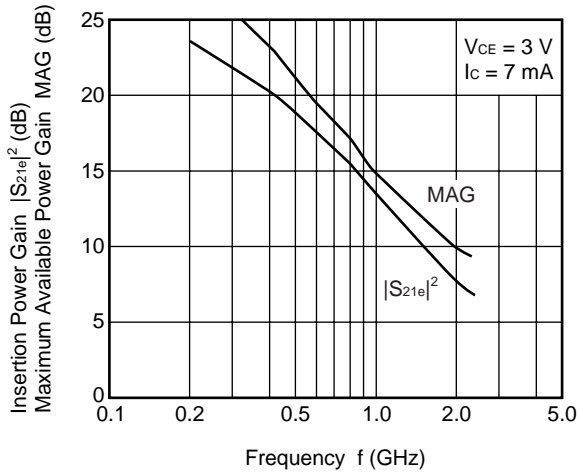

INSERTION POWER GAIN vs. COLLECTOR CURRENT

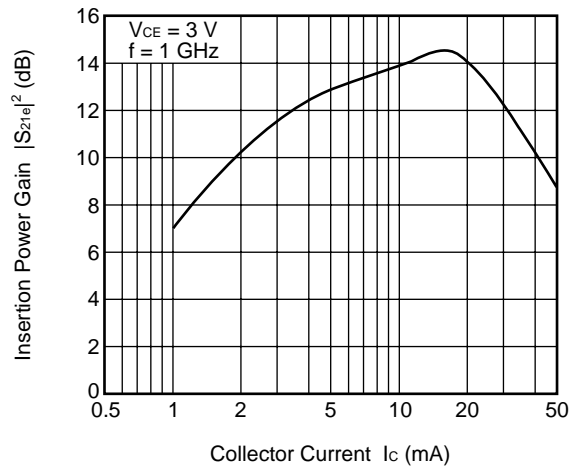

NOISE FIGURE vs. COLLECTOR CURRENT

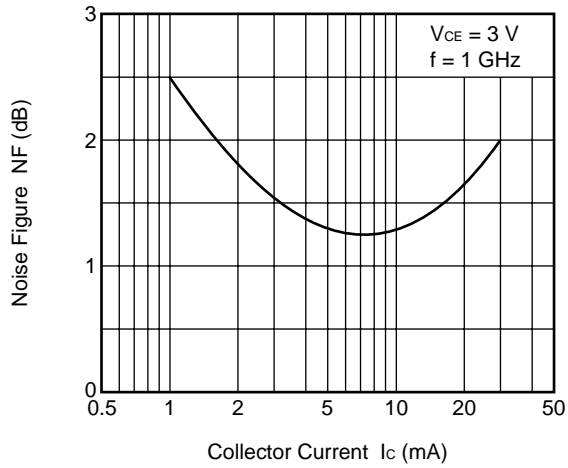

Remark The graphs indicate nominal characteristics.

S-PARAMETERS

V_{CE} = 1 V, I_c = 1 mA, Z_o = 50 Ω

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.2	0.947	-26.7	3.453	158.0	0.068	72.9	0.967	-11.9
0.4	0.835	-52.6	2.996	138.7	0.123	57.4	0.863	-22.3
0.6	0.787	-77.5	2.609	121.6	0.161	45.7	0.757	-32.9
0.8	0.738	-95.9	2.363	108.5	0.178	36.8	0.699	-40.9
1.0	0.692	-112.1	2.118	98.6	0.192	29.0	0.654	-44.9
1.2	0.656	-126.6	1.853	89.4	0.200	24.3	0.602	-47.4
1.4	0.648	-138.2	1.663	79.7	0.201	22.9	0.554	-50.7
1.6	0.629	-148.0	1.528	72.7	0.194	21.7	0.513	-55.0
1.8	0.603	-158.4	1.385	66.6	0.182	20.6	0.490	-59.6
2.0	0.606	-169.1	1.247	60.9	0.173	18.5	0.472	-64.2
2.2	0.629	-176.8	1.156	53.8	0.169	19.6	0.448	-69.6
2.4	0.643	177.7	1.100	48.3	0.163	22.6	0.437	-77.1
2.6	0.649	172.8	1.039	45.1	0.159	26.0	0.445	-84.3
2.8	0.656	167.8	0.945	41.3	0.153	31.0	0.452	-89.8
3.0	0.672	163.6	0.886	35.9	0.151	35.5	0.444	-95.4

V_{CE} = 1 V, I_c = 3 mA, Z_o = 50 Ω

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.2	0.829	-45.4	8.382	146.5	0.061	64.5	0.878	-23.6
0.4	0.673	-82.9	6.392	123.5	0.097	49.0	0.662	-39.2
0.6	0.619	-109.4	5.005	106.9	0.115	41.6	0.521	-50.1
0.8	0.568	-127.9	4.115	96.8	0.122	38.0	0.444	-56.0
1.0	0.542	-143.0	3.493	89.2	0.130	36.2	0.387	-58.3
1.2	0.540	-154.9	3.029	82.2	0.138	36.4	0.340	-59.8
1.4	0.543	-162.7	2.607	75.3	0.146	38.7	0.301	-63.0
1.6	0.529	-170.3	2.338	70.4	0.149	41.4	0.271	-67.1
1.8	0.522	-179.2	2.072	65.8	0.153	43.4	0.251	-71.8
2.0	0.540	173.2	1.850	61.3	0.156	43.6	0.234	-76.9
2.2	0.563	168.2	1.692	55.5	0.165	44.5	0.215	-84.6
2.4	0.577	164.4	1.598	51.0	0.176	45.8	0.209	-93.4
2.6	0.586	160.6	1.511	48.4	0.188	47.7	0.213	-101.4
2.8	0.600	157.1	1.382	45.4	0.195	49.7	0.216	-108.0
3.0	0.616	154.4	1.288	40.7	0.199	50.6	0.217	-114.8

V_{CE} = 1 V, I_c = 5 mA, Z_o = 50 Ω

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.2	0.732	-59.6	11.569	138.4	0.055	60.0	0.790	-31.6
0.4	0.588	-101.6	8.006	115.1	0.081	47.5	0.536	-48.4
0.6	0.543	-126.5	5.948	100.2	0.094	44.0	0.403	-58.2
0.8	0.511	-143.6	4.748	91.7	0.102	43.7	0.334	-63.0
1.0	0.501	-156.8	3.960	85.6	0.112	44.2	0.283	-64.7
1.2	0.511	-166.4	3.400	79.2	0.123	45.5	0.243	-66.6
1.4	0.516	-172.5	2.936	73.0	0.135	47.9	0.213	-70.5
1.6	0.505	-179.0	2.602	69.1	0.145	50.7	0.189	-75.6
1.8	0.506	173.1	2.296	65.0	0.153	52.4	0.170	-81.5
2.0	0.527	166.8	2.047	61.0	0.161	52.3	0.157	-88.6
2.2	0.548	162.8	1.865	55.7	0.173	52.1	0.144	-99.3
2.4	0.564	159.5	1.761	51.5	0.186	52.1	0.144	-110.9
2.6	0.574	156.2	1.661	49.1	0.202	53.0	0.150	-119.7
2.8	0.588	153.1	1.521	46.6	0.210	54.2	0.156	-127.5
3.0	0.605	151.0	1.415	42.1	0.217	54.2	0.163	-134.9

V_{CE} = 3 V, I_c = 1 mA, Z_o = 50 Ω

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.2	0.955	-23.9	3.465	160.1	0.053	73.5	0.977	-9.3
0.4	0.852	-47.2	3.060	142.4	0.097	60.6	0.894	-17.6
0.6	0.803	-71.0	2.702	126.3	0.130	49.7	0.802	-26.5
0.8	0.759	-88.9	2.480	113.4	0.147	41.4	0.754	-33.8
1.0	0.710	-104.8	2.263	103.8	0.159	34.0	0.723	-37.4
1.2	0.667	-119.3	1.995	95.1	0.167	29.3	0.677	-39.2
1.4	0.653	-131.7	1.791	85.4	0.169	27.8	0.630	-41.7
1.6	0.632	-141.9	1.654	78.2	0.164	27.1	0.589	-45.0
1.8	0.602	-152.6	1.508	72.1	0.154	26.6	0.565	-49.1
2.0	0.599	-163.9	1.359	66.4	0.147	25.0	0.549	-53.3
2.2	0.621	-172.4	1.256	59.2	0.143	26.8	0.529	-57.3
2.4	0.635	-178.4	1.200	53.7	0.139	30.1	0.511	-63.4
2.6	0.639	176.3	1.137	50.5	0.138	34.9	0.513	-70.0
2.8	0.645	171.0	1.038	46.5	0.136	41.1	0.522	-75.1
3.0	0.659	166.4	0.976	41.4	0.135	46.7	0.512	-79.8

V_{CE} = 3 V, I_c = 3 mA, Z_o = 50 Ω

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.2	0.849	-39.1	8.593	149.9	0.049	67.9	0.910	-18.1
0.4	0.690	-72.9	6.799	128.1	0.078	53.3	0.728	-30.3
0.6	0.626	-99.3	5.461	111.5	0.096	46.0	0.595	-39.2
0.8	0.565	-117.8	4.546	101.0	0.104	42.3	0.525	-44.2
1.0	0.528	-133.4	3.893	93.5	0.111	40.7	0.478	-45.5
1.2	0.515	-146.4	3.387	86.5	0.118	40.9	0.433	-45.6
1.4	0.515	-155.4	2.949	79.2	0.126	43.1	0.394	-47.1
1.6	0.500	-163.5	2.631	74.4	0.130	46.1	0.360	-49.6
1.8	0.490	-172.8	2.342	69.8	0.134	48.8	0.339	-53.2
2.0	0.505	178.7	2.095	65.4	0.137	49.3	0.322	-56.7
2.2	0.528	173.1	1.910	59.7	0.146	50.5	0.302	-60.7
2.4	0.543	168.9	1.808	54.9	0.156	51.9	0.287	-66.9
2.6	0.553	164.9	1.713	52.3	0.169	53.8	0.283	-73.6
2.8	0.566	161.0	1.571	49.3	0.177	56.6	0.284	-79.0
3.0	0.583	158.0	1.464	44.8	0.182	57.8	0.276	-84.0

V_{CE} = 3 V, I_c = 5 mA, Z_o = 50 Ω

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.2	0.759	-50.6	12.082	142.5	0.045	62.8	0.844	-24.2
0.4	0.593	-89.5	8.740	119.7	0.067	51.4	0.615	-36.8
0.6	0.533	-115.2	6.641	104.4	0.080	47.9	0.483	-44.2
0.8	0.487	-132.9	5.367	95.5	0.088	47.5	0.418	-47.3
1.0	0.467	-147.3	4.496	89.2	0.097	48.2	0.376	-47.5
1.2	0.468	-158.3	3.871	83.0	0.107	49.6	0.338	-46.9
1.4	0.473	-165.5	3.337	76.7	0.118	52.2	0.306	-48.2
1.6	0.462	-172.6	2.925	72.2	0.127	55.0	0.277	-50.6
1.8	0.460	179.1	2.585	68.2	0.135	57.1	0.258	-54.1
2.0	0.479	171.9	2.349	64.7	0.142	57.2	0.241	-57.8
2.2	0.502	167.4	2.139	59.5	0.154	57.4	0.224	-62.4
2.4	0.518	163.9	2.017	55.1	0.166	57.3	0.209	-69.5
2.6	0.529	160.4	1.908	52.8	0.182	58.6	0.204	-76.9
2.8	0.544	157.1	1.752	50.1	0.192	60.3	0.202	-83.4
3.0	0.562	154.8	1.631	45.8	0.198	60.5	0.195	-89.3

$V_{CE} = 3\text{ V}$, $I_C = 7\text{ mA}$, $Z_o = 50\ \Omega$


Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.2	0.673	-61.7	14.941	136.5	0.040	61.6	0.773	-29.2
0.4	0.523	-103.4	10.008	113.4	0.058	51.9	0.527	-41.0
0.6	0.474	-127.5	7.335	99.6	0.070	51.2	0.406	-46.4
0.8	0.444	-144.1	5.814	91.9	0.080	52.6	0.349	-48.3
1.0	0.435	-157.2	4.839	86.4	0.091	54.3	0.313	-47.9
1.2	0.444	-166.4	4.135	80.8	0.102	56.2	0.281	-47.0
1.4	0.450	-172.3	3.562	75.0	0.116	58.0	0.254	-47.9
1.6	0.442	-178.6	3.109	71.0	0.128	60.2	0.228	-50.6
1.8	0.445	173.9	2.741	67.5	0.137	62.2	0.211	-54.4
2.0	0.466	167.7	2.474	63.9	0.146	61.8	0.195	-58.5
2.2	0.489	163.8	2.266	59.2	0.159	61.1	0.178	-63.8
2.4	0.505	160.7	2.136	55.1	0.173	60.3	0.164	-72.0
2.6	0.518	157.7	2.021	53.0	0.190	61.0	0.159	-80.7
2.8	0.534	154.6	1.855	50.6	0.201	62.2	0.157	-88.3
3.0	0.551	152.6	1.722	46.5	0.207	61.9	0.153	-95.5

$V_{CE} = 3\text{ V}$, $I_C = 10\text{ mA}$, $Z_o = 50\ \Omega$

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
0.2	0.593	-73.5	17.349	130.6	0.036	58.5	0.701	-33.6
0.4	0.470	-115.9	10.897	108.5	0.051	53.7	0.454	-43.4
0.6	0.435	-138.3	7.822	95.9	0.063	55.3	0.348	-47.0
0.8	0.418	-153.3	6.134	89.3	0.075	57.9	0.300	-48.0
1.0	0.418	-165.0	5.060	84.4	0.087	59.6	0.270	-46.9
1.2	0.431	-172.7	4.321	79.2	0.100	61.1	0.243	-45.7
1.4	0.438	-177.4	3.713	73.9	0.115	62.5	0.219	-46.7
1.6	0.432	176.8	3.234	70.3	0.129	63.8	0.196	-49.6
1.8	0.438	170.0	2.853	66.8	0.139	65.3	0.179	-53.7
2.0	0.461	164.5	2.564	63.4	0.150	64.6	0.164	-58.5
2.2	0.483	161.1	2.350	59.0	0.162	63.6	0.148	-64.3
2.4	0.499	158.4	2.213	55.1	0.178	62.5	0.134	-73.7
2.6	0.512	155.5	2.095	52.9	0.195	62.6	0.130	-83.7
2.8	0.529	152.8	1.922	50.8	0.207	63.5	0.127	-92.6
3.0	0.547	151.0	1.785	46.8	0.213	63.1	0.125	-101.2

★ PACKAGE DIMENSIONS

FLAT-LEAD 3-PIN THIN-TYPE ULTRA SUPER MINIMOLD (UNIT: mm)

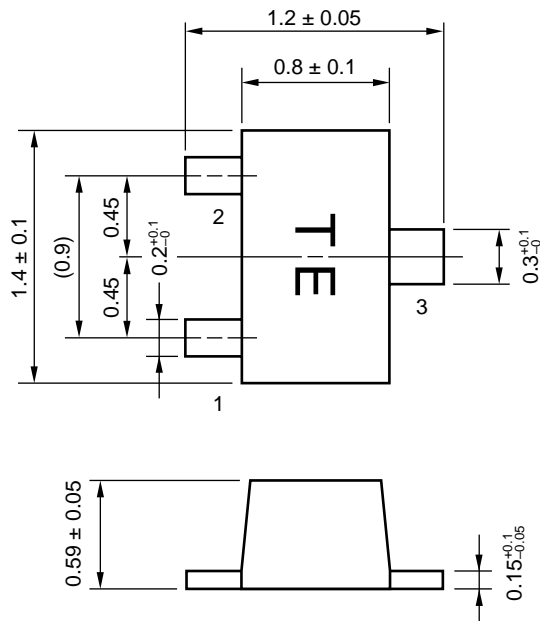

PIN CONNECTIONS

- 1. Emitter
- 2. Base
- 3. Collector

- **The information in this document is current as of February, 2002. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
 - No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
 - NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
 - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
 - While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
 - NEC semiconductor products are classified into the following three quality grades:
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
- (Note)
- (1) "NEC" as used in this statement means NEC Corporation, NEC Compound Semiconductor Devices, Ltd. and also includes its majority-owned subsidiaries.
 - (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4-0110

► **Business issue**

NEC Compound Semiconductor Devices, Ltd.

5th Sales Group, Sales Division TEL: +81-3-3798-6372 FAX: +81-3-3798-6783 E-mail: salesinfo@csd-nec.com

NEC Compound Semiconductor Devices Hong Kong Limited

Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309

Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859

Korea Branch Office TEL: +82-2-528-0301 FAX: +82-2-528-0302

NEC Electron Devices European Operations <http://www.nec.de/>

TEL: +49-211-6503-101 FAX: +49-211-6503-487

California Eastern Laboratories, Inc. <http://www.cel.com/>

TEL: +1-408-988-3500 FAX: +1-408-988-0279

► **Technical issue**

NEC Compound Semiconductor Devices, Ltd. <http://www.csd-nec.com/>

Sales Engineering Group, Sales Division

E-mail: techinfo@csd-nec.com FAX: +81-44-435-1918