

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

GaAs HETEROJUNCTION BIPOLAR TRANSISTOR

Phase-out/Discontinued

NE52418

**L to S BAND LOW NOISE AND HIGH GAIN AMPLIFIER
NPN GaAs HBT**

DESCRIPTION

The NE52418 is an NPN GaAs HBT (Heterojunction Bipolar Transistor) developed for L to S band mobile communication equipment.

FEATURES

- Ideal for low noise and high gain amplifiers
 $NF = 0.95 \text{ dB TYP.}$, $G_a = 17 \text{ dB TYP.}$ (@ $V_{CE} = 2 \text{ V}$, $I_c = 3 \text{ mA}$, $f = 2 \text{ GHz}$, $Z_s = Z_L = 50 \Omega$)
 $IIP_3 = +8 \text{ dBm TYP.}$ (@ $V_{CE} = 2.5 \text{ V}$, $I_c = 8 \text{ mA}$, $f = 2 \text{ GHz}$, 1 tone, $Z_s = Z_L = Z_{opt}$)
- 4-pin super minimold package employed (SOT-343 style)
- Grounded emitter transistor

APPLICATIONS

- Mobile communication terminals and other L to S band microwave communication applications

ORDERING INFORMATION

Part Number	Package	Marking	Supplying Form
NE52418-T1	4-pin super minimold	V45	<ul style="list-style-type: none"> • 8 mm wide embossed taping • Pin 3 (Emitter), Pin 4 (Collector) face the perforation side of the tape • Qty 3 kpcs/reel

Remark To order evaluation samples, consult your NEC sales representative.
 Part number for sample order: NE52418

Because this product uses high-frequency technology, avoid excessive static electricity, etc.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
 Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

ABSOLUTE MAXIMUM RATINGS (T_A = +25°C)

Parameter	Symbol	Ratings	Unit
Collector to Emitter Voltage	V _{CEO}	5.0	V
Collector to Base Voltage	V _{CBO}	3.0	V
Emitter to Base Voltage	V _{EBO}	3.0	V
Collector Current	I _c	40	mA
Base Current	I _B	0.3	mA
Total Power Dissipation	P _{tot}	150	mW
Junction Temperature	T _j	+125	°C
Storage Temperature	T _{stg}	-65 to +125	°C

RECOMMENDED OPERATING CONDITIONS (T_A = +25°C)





Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Collector to Emitter Voltage	V _{CE}	1.5	2.0	3.0	V
Collector Current	I _c	-	3	10	mA
Input Power	P _{in}	-	-	0	dBm

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, T_A = +25°C)


Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Emitter to Base Leak Current	I _{EBO}	V _{EBO} = 3 V	-	0.2	1.0	μA
Collector to Base Leak Current	I _{CBO}	V _{CBO} = 3 V	-	0.2	1.0	μA
DC Current Gain	h _{FE}	V _{CE} = 2 V, I _c = 3 mA	110	150	190	-
Noise Figure	NF	V _{CE} = 2 V, I _c = 3 mA, f = 2 GHz,	-	0.95	1.35	dB
Associated Gain	G _a	Z _S = Z _L = 50 Ω	15	17	-	dB
3rd Order Intermodulation Distortion Input Intercept Point	IIP ₃	V _{CE} = 2.5 V, I _c = 8 mA, f = 2 GHz, 1 tone, Z _S = Z _L = Z _{opt}	-	+8	-	dBm

TYPICAL CHARACTERISTICS (Unless otherwise specified, $T_A = +25^\circ\text{C}$)

DC CHARACTERISTICS

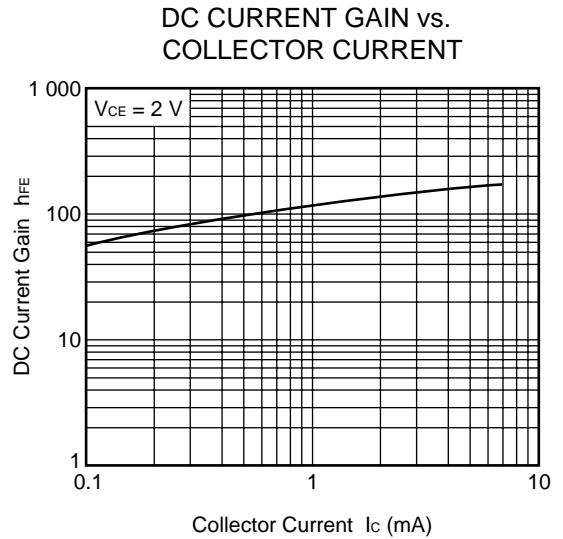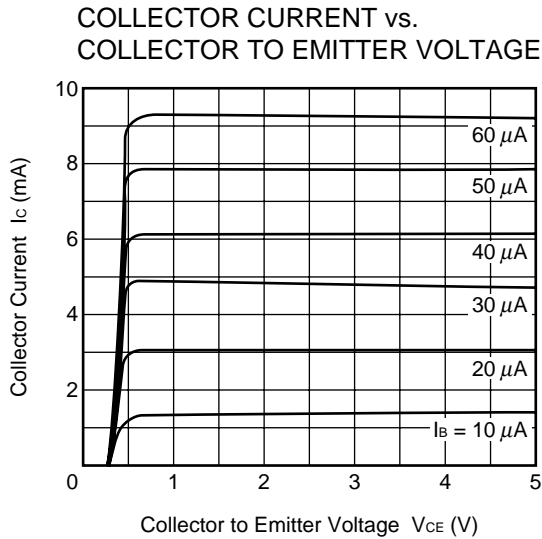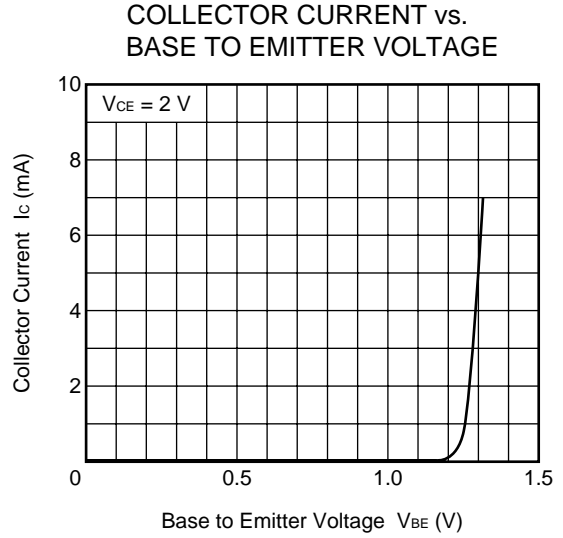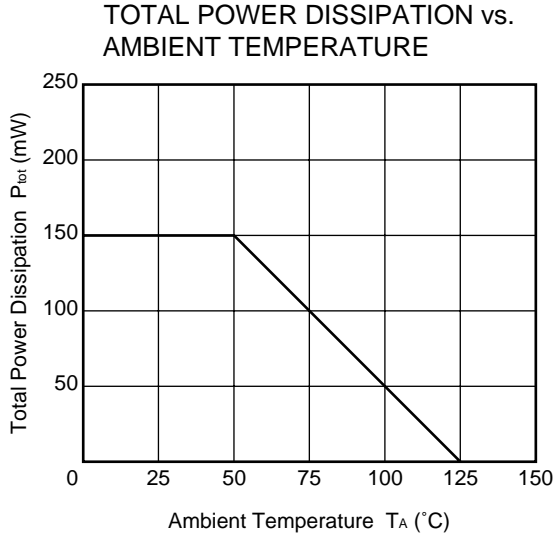


NOISE CHARACTERISTICS

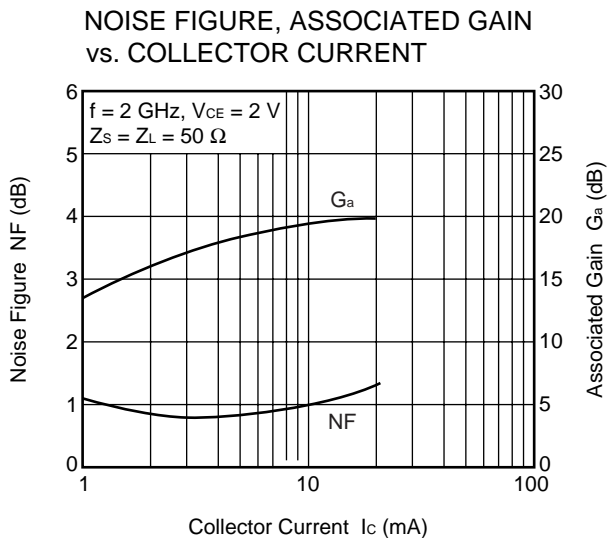

GAIN CHARACTERISTICS

INSERTION POWER GAIN, MAXIMUM
AVAILABLE POWER GAIN, MAXIMUM
STABLE POWER GAIN vs. FREQUENCY

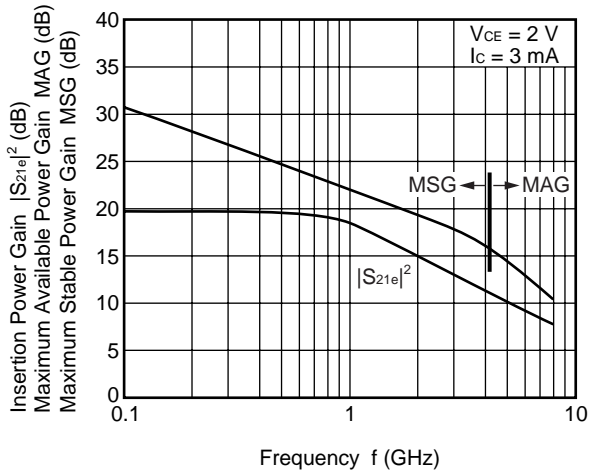

Remark The graphs indicate nominal characteristics.

S-PARAMETERS

V_{CE} = 2 V, I_c = 3 mA

Frequency MHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂		S ₂₁ ² dB	S ₁₂ ² dB	K
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.			
2000	0.607	-78.4	5.550	108.2	0.066	48.4	0.743	-37.2	14.89	-23.55	0.55
2100	0.581	-80.8	5.392	105.7	0.068	47.4	0.729	-37.8	14.64	-23.30	0.59
2200	0.556	-84.4	5.291	103.4	0.067	46.3	0.712	-39.1	14.47	-23.42	0.63
2300	0.540	-87.3	5.133	100.7	0.069	46.8	0.702	-40.3	14.21	-23.16	0.65
2400	0.529	-90.6	5.043	98.4	0.072	45.2	0.695	-41.4	14.05	-22.88	0.66
2500	0.521	-92.0	4.923	96.8	0.073	45.0	0.690	-41.8	13.84	-22.70	0.67
2600	0.495	-96.6	4.837	93.8	0.071	45.6	0.668	-43.0	13.69	-22.94	0.73
2700	0.480	-98.4	4.713	91.9	0.075	43.4	0.663	-43.7	13.47	-22.45	0.74
2800	0.453	-102.8	4.618	89.3	0.074	44.0	0.646	-44.5	13.29	-22.56	0.79
2900	0.449	-106.2	4.508	87.5	0.078	42.7	0.647	-45.9	13.08	-22.21	0.78
3000	0.432	-108.3	4.376	85.4	0.076	42.6	0.629	-47.0	12.82	-22.37	0.84
3100	0.408	-112.4	4.309	83.3	0.079	41.3	0.621	-47.5	12.69	-22.09	0.86
3200	0.406	-115.8	4.231	81.0	0.078	42.2	0.614	-48.5	12.53	-22.10	0.87
3300	0.400	-119.1	4.171	79.3	0.081	42.4	0.608	-49.5	12.41	-21.82	0.87
3400	0.387	-122.5	4.081	77.0	0.078	40.7	0.598	-50.5	12.22	-22.18	0.94
3500	0.373	-124.4	4.012	75.6	0.081	40.2	0.587	-51.3	12.07	-21.87	0.95
3600	0.368	-129.9	3.946	73.2	0.083	40.8	0.582	-52.1	11.92	-21.61	0.94
3700	0.361	-132.4	3.867	71.5	0.082	40.8	0.575	-53.0	11.75	-21.74	0.98
3800	0.348	-136.2	3.797	69.7	0.083	40.7	0.565	-54.4	11.59	-21.65	1.01
3900	0.335	-138.6	3.720	68.0	0.085	40.1	0.564	-55.1	11.41	-21.40	1.01
4000	0.329	-141.3	3.658	66.4	0.084	40.0	0.561	-56.0	11.27	-21.53	1.05
4500	0.310	-159.4	3.415	57.3	0.089	40.8	0.534	-60.3	10.67	-21.03	1.09
5000	0.299	-176.4	3.158	49.0	0.097	41.2	0.524	-67.1	9.99	-20.28	1.09
5500	0.298	170.1	2.944	41.3	0.106	42.3	0.501	-72.6	9.38	-19.51	1.11
6000	0.314	157.1	2.761	33.5	0.108	42.0	0.492	-78.1	8.82	-19.37	1.14
6500	0.327	144.8	2.629	25.8	0.120	41.7	0.477	-84.3	8.40	-18.44	1.10
7000	0.344	133.1	2.482	18.2	0.134	40.2	0.454	-90.3	7.89	-17.44	1.07
7500	0.366	122.7	2.363	10.2	0.145	37.6	0.429	-97.1	7.47	-16.78	1.06
8000	0.398	113.0	2.276	3.1	0.159	36.1	0.399	-106.2	7.14	-15.97	1.02
8500	0.440	104.8	2.184	-5.3	0.176	33.0	0.374	-119.0	6.79	-15.09	0.97
9000	0.485	97.8	2.098	-13.7	0.194	27.5	0.359	-136.5	6.44	-14.26	0.92
9500	0.542	89.5	1.985	-22.8	0.206	23.0	0.367	-155.6	5.95	-13.72	0.87
10000	0.600	82.4	1.877	-31.9	0.225	16.4	0.398	-174.3	5.47	-12.97	0.79
10500	0.650	76.1	1.762	-41.2	0.234	10.2	0.440	167.8	4.92	-12.60	0.75
11000	0.697	70.7	1.629	-49.6	0.242	3.6	0.484	152.9	4.24	-12.32	0.70
11500	0.739	65.2	1.516	-58.7	0.252	-3.2	0.522	137.8	3.62	-11.97	0.66
12000	0.772	60.3	1.401	-67.4	0.255	-9.6	0.556	123.6	2.93	-11.88	0.64
12500	0.797	54.3	1.282	-76.4	0.255	-17.0	0.600	109.7	2.16	-11.86	0.62
13000	0.815	48.8	1.152	-85.1	0.252	-24.5	0.643	96.5	1.23	-11.98	0.62
13500	0.827	42.5	1.019	-94.3	0.242	-31.4	0.705	85.4	0.16	-12.32	0.61
14000	0.832	35.9	0.895	-102.7	0.229	-38.8	0.742	75.6	-0.97	-12.81	0.62
14500	0.837	30.6	0.787	-110.1	0.216	-43.2	0.808	69.7	-2.08	-13.33	0.58
15000	0.831	26.2	0.678	-118.6	0.209	-50.8	0.838	62.6	-3.38	-13.58	0.54
15500	0.837	23.3	0.589	-126.0	0.196	-54.5	0.881	58.0	-4.60	-14.15	0.45
16000	0.818	21.7	0.498	-133.5	0.186	-59.7	0.897	52.8	-6.05	-14.61	0.42

V_{CE} = 2 V, I_c = 5 mA

Frequency MHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂		S ₂₁ ² dB	S ₁₂ ² dB	K
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.			
2000	0.471	-86.1	6.989	100.2	0.058	54.3	0.661	-37.8	16.89	-24.74	0.70
2100	0.444	-88.2	6.726	98.1	0.059	51.9	0.648	-38.3	16.55	-24.52	0.75
2200	0.420	-91.6	6.521	95.9	0.060	51.0	0.630	-39.0	16.29	-24.37	0.79
2300	0.403	-94.8	6.310	93.5	0.063	50.9	0.620	-40.1	16.00	-24.02	0.81
2400	0.397	-97.8	6.156	91.4	0.063	50.8	0.614	-40.9	15.79	-23.96	0.82
2500	0.385	-99.0	5.971	89.8	0.066	50.8	0.611	-40.9	15.52	-23.67	0.83
2600	0.366	-103.5	5.839	87.3	0.067	49.4	0.592	-42.1	15.33	-23.50	0.87
2700	0.354	-105.2	5.675	85.7	0.069	50.1	0.584	-42.8	15.08	-23.28	0.89
2800	0.329	-109.9	5.516	83.4	0.070	49.7	0.573	-43.4	14.83	-23.08	0.91
2900	0.327	-113.2	5.366	81.6	0.070	50.1	0.571	-44.8	14.59	-23.11	0.93
3000	0.315	-115.8	5.191	80.0	0.072	49.5	0.555	-45.3	14.31	-22.90	0.96
3100	0.293	-119.0	5.088	77.8	0.071	50.1	0.549	-45.8	14.13	-22.95	1.00
3200	0.291	-123.3	4.981	76.0	0.077	49.3	0.543	-46.7	13.95	-22.33	0.97
3300	0.287	-126.2	4.894	74.5	0.077	49.9	0.537	-47.7	13.79	-22.22	0.98
3400	0.276	-129.9	4.759	72.4	0.079	50.0	0.532	-48.3	13.55	-22.05	0.99
3500	0.266	-132.0	4.661	71.3	0.080	50.9	0.525	-49.1	13.37	-21.98	1.02
3600	0.266	-138.9	4.580	69.0	0.081	50.3	0.519	-49.7	13.22	-21.86	1.02
3700	0.261	-140.5	4.483	67.7	0.081	50.1	0.513	-50.1	13.03	-21.86	1.05
3800	0.248	-144.3	4.392	66.0	0.082	48.5	0.508	-52.1	12.85	-21.73	1.06
3900	0.238	-147.6	4.292	64.4	0.086	49.6	0.502	-52.3	12.65	-21.26	1.05
4000	0.236	-150.1	4.212	62.9	0.087	50.1	0.498	-53.5	12.49	-21.25	1.07
4500	0.225	-169.6	3.899	54.8	0.096	48.4	0.478	-57.3	11.82	-20.36	1.07
5000	0.229	173.0	3.591	47.3	0.102	48.5	0.468	-63.5	11.10	-19.86	1.09
5500	0.231	160.1	3.332	40.2	0.112	47.3	0.449	-69.4	10.45	-19.01	1.09
6000	0.254	147.7	3.135	33.0	0.122	45.2	0.438	-74.9	9.92	-18.31	1.07
6500	0.273	137.6	2.960	25.8	0.133	43.3	0.423	-80.8	9.43	-17.50	1.05
7000	0.295	125.9	2.800	18.7	0.145	39.5	0.401	-86.2	8.94	-16.75	1.03
7500	0.321	117.5	2.666	11.3	0.158	36.7	0.377	-92.5	8.52	-16.01	1.01
8000	0.355	108.9	2.563	4.3	0.168	33.4	0.342	-101.5	8.17	-15.49	1.01
8500	0.399	101.6	2.462	-3.6	0.186	30.6	0.315	-114.3	7.82	-14.63	0.96
9000	0.445	94.7	2.359	-11.4	0.200	26.0	0.294	-133.4	7.45	-13.97	0.93
9500	0.507	87.6	2.251	-19.8	0.212	19.6	0.300	-153.2	7.05	-13.47	0.88
10000	0.564	81.6	2.149	-28.6	0.229	14.6	0.333	-174.3	6.65	-12.80	0.83
10500	0.620	74.9	2.031	-37.5	0.235	8.7	0.371	167.3	6.15	-12.56	0.79
11000	0.671	70.2	1.898	-46.0	0.242	1.5	0.418	151.8	5.57	-12.32	0.74
11500	0.709	64.9	1.776	-54.5	0.253	-4.2	0.453	137.4	4.99	-11.95	0.71
12000	0.748	60.4	1.651	-63.2	0.252	-10.1	0.489	122.3	4.35	-11.97	0.70
12500	0.779	54.3	1.530	-72.1	0.254	-17.7	0.541	109.1	3.69	-11.89	0.67
13000	0.799	48.2	1.385	-81.5	0.251	-25.4	0.591	96.1	2.83	-12.00	0.66
13500	0.812	42.7	1.252	-90.5	0.243	-33.0	0.658	85.0	1.95	-12.29	0.64
14000	0.821	35.9	1.106	-100.2	0.233	-40.1	0.698	75.4	0.87	-12.65	0.63
14500	0.821	29.9	0.987	-108.3	0.218	-44.8	0.773	69.6	-0.12	-13.25	0.60
15000	0.814	25.6	0.848	-117.4	0.207	-50.4	0.811	63.8	-1.44	-13.66	0.56
15500	0.810	22.8	0.748	-125.6	0.188	-55.8	0.847	58.4	-2.53	-14.53	0.50
16000	0.786	21.1	0.631	-134.7	0.182	-61.0	0.881	53.9	-4.00	-14.82	0.42

V_{CE} = 2 V, I_c = 8 mA

Frequency MHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂		S ₂₁ ² dB	S ₁₂ ² dB	K
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.			
2000	0.358	-89.7	8.123	94.6	0.055	57.1	0.596	-37.0	18.19	-25.22	0.82
2100	0.334	-91.4	7.762	92.5	0.055	57.4	0.585	-37.0	17.80	-25.12	0.87
2200	0.316	-94.4	7.496	90.7	0.057	55.9	0.568	-37.3	17.50	-24.95	0.90
2300	0.303	-97.2	7.214	88.5	0.058	57.8	0.560	-38.5	17.16	-24.67	0.92
2400	0.293	-100.4	7.013	86.6	0.060	57.0	0.555	-39.4	16.92	-24.42	0.92
2500	0.286	-100.5	6.781	85.1	0.062	57.5	0.551	-39.7	16.63	-24.11	0.93
2600	0.273	-105.4	6.606	83.1	0.062	55.5	0.538	-39.9	16.40	-24.09	0.97
2700	0.260	-106.3	6.393	81.4	0.065	57.7	0.532	-40.6	16.11	-23.74	0.97
2800	0.237	-111.4	6.201	79.5	0.068	57.6	0.521	-41.6	15.85	-23.38	0.99
2900	0.236	-116.0	6.046	77.8	0.069	58.3	0.520	-42.5	15.63	-23.22	0.98
3000	0.225	-116.9	5.828	76.3	0.069	58.8	0.505	-42.9	15.31	-23.28	1.04
3100	0.212	-121.4	5.687	74.6	0.073	57.6	0.501	-43.6	15.10	-22.74	1.02
3200	0.209	-125.7	5.567	72.8	0.075	57.2	0.496	-44.2	14.91	-22.46	1.02
3300	0.206	-129.4	5.444	71.5	0.074	56.4	0.491	-45.0	14.72	-22.58	1.05
3400	0.196	-133.1	5.289	69.6	0.078	54.9	0.486	-46.0	14.47	-22.19	1.05
3500	0.184	-134.9	5.187	68.5	0.080	56.7	0.479	-46.5	14.30	-21.94	1.05
3600	0.186	-142.0	5.084	66.5	0.082	55.3	0.477	-46.9	14.12	-21.72	1.05
3700	0.184	-144.7	4.963	65.4	0.084	54.8	0.471	-48.2	13.92	-21.48	1.05
3800	0.174	-149.0	4.857	63.8	0.085	53.2	0.464	-49.2	13.73	-21.45	1.07
3900	0.170	-152.4	4.744	62.3	0.089	53.7	0.462	-49.6	13.52	-21.00	1.06
4000	0.167	-154.4	4.665	61.1	0.088	53.5	0.457	-50.5	13.38	-21.08	1.08
4500	0.164	-176.7	4.296	53.5	0.099	52.0	0.440	-54.6	12.66	-20.06	1.07
5000	0.174	165.3	3.947	46.7	0.108	49.9	0.426	-61.2	11.93	-19.32	1.07
5500	0.182	151.5	3.657	40.1	0.121	49.5	0.409	-66.7	11.26	-18.37	1.06
6000	0.207	139.9	3.430	33.3	0.130	45.9	0.401	-72.1	10.71	-17.70	1.04
6500	0.228	132.4	3.243	26.5	0.141	44.2	0.384	-77.6	10.22	-17.02	1.03
7000	0.255	121.5	3.061	19.6	0.156	40.6	0.361	-83.0	9.72	-16.13	1.00
7500	0.281	112.9	2.911	12.6	0.164	36.9	0.331	-88.2	9.28	-15.73	1.02
8000	0.316	105.3	2.794	6.2	0.178	32.2	0.301	-97.0	8.93	-15.01	0.99
8500	0.360	99.0	2.690	-1.6	0.188	29.9	0.269	-109.7	8.59	-14.51	0.98
9000	0.410	93.6	2.589	-8.9	0.208	25.1	0.245	-129.5	8.26	-13.63	0.93
9500	0.469	86.6	2.476	-17.2	0.222	19.9	0.249	-152.1	7.88	-13.09	0.90
10000	0.533	80.9	2.371	-25.4	0.229	14.4	0.277	-174.2	7.50	-12.79	0.86
10500	0.590	75.0	2.256	-34.1	0.243	7.9	0.318	165.0	7.07	-12.29	0.82
11000	0.640	70.2	2.108	-42.3	0.244	1.3	0.367	149.7	6.48	-12.26	0.79
11500	0.684	64.8	1.991	-50.8	0.254	-5.9	0.403	135.1	5.98	-11.90	0.76
12000	0.725	60.4	1.869	-59.5	0.256	-12.1	0.439	120.6	5.43	-11.83	0.73
12500	0.755	54.9	1.738	-68.1	0.253	-18.5	0.492	107.3	4.80	-11.92	0.72
13000	0.787	48.8	1.596	-77.5	0.254	-26.5	0.543	95.1	4.06	-11.90	0.70
13500	0.796	42.3	1.458	-86.7	0.240	-32.4	0.613	84.4	3.27	-12.41	0.70
14000	0.806	35.5	1.300	-96.8	0.232	-39.1	0.664	76.0	2.28	-12.68	0.68
14500	0.808	29.3	1.166	-105.3	0.218	-44.7	0.741	70.0	1.33	-13.22	0.65
15000	0.795	25.0	1.021	-115.2	0.203	-51.2	0.790	63.8	0.18	-13.86	0.60
15500	0.789	22.4	0.889	-124.5	0.190	-55.4	0.829	59.2	-1.02	-14.43	0.53
16000	0.753	21.4	0.759	-135.0	0.181	-61.5	0.868	54.6	-2.39	-14.84	0.43

NOISE PARAMETERS

$V_{CE} = 2\text{ V}$, $I_C = 3\text{ mA}$


Frequency (GHz)	NF _{min.} (dB)	G _a (dB)	Γ _{opt}		Rn/50
			MAG.	ANG. (deg.)	
0.8	0.24	25.2	0.39	6.0	0.20
1.0	0.43	24.4	0.42	13.0	0.21
1.2	0.44	21.6	0.44	17.0	0.22
1.4	0.56	18.9	0.54	16.6	0.20
1.6	0.60	19.0	0.45	21.6	0.21
1.8	0.67	18.3	0.43	26.0	0.21
2.0	0.75	17.2	0.43	31.4	0.21
2.2	0.83	16.2	0.42	35.1	0.21
2.4	0.91	16.0	0.41	37.0	0.20
2.6	0.99	15.3	0.35	44.0	0.20

$V_{CE} = 2\text{ V}$, $I_C = 5\text{ mA}$

Frequency (GHz)	NF _{min.} (dB)	G _a (dB)	Γ _{opt}		Rn/50
			MAG.	ANG. (deg.)	
0.8	0.51	26.2	0.40	8.3	0.19
1.0	0.54	24.2	0.38	10.0	0.20
1.2	0.59	22.7	0.39	11.9	0.20
1.4	0.69	21.3	0.38	13.2	0.20
1.6	0.73	19.8	0.38	14.4	0.19
1.8	0.84	18.9	0.38	17.2	0.19
2.0	0.84	18.1	0.35	21.1	0.19
2.2	0.89	17.6	0.32	28.0	0.18
2.4	0.95	17.1	0.30	33.4	0.18
2.6	0.95	16.6	0.26	42.8	0.18

PACKAGE DIMENSIONS

4-PIN SUPER MINIMOLD (UNIT: mm)

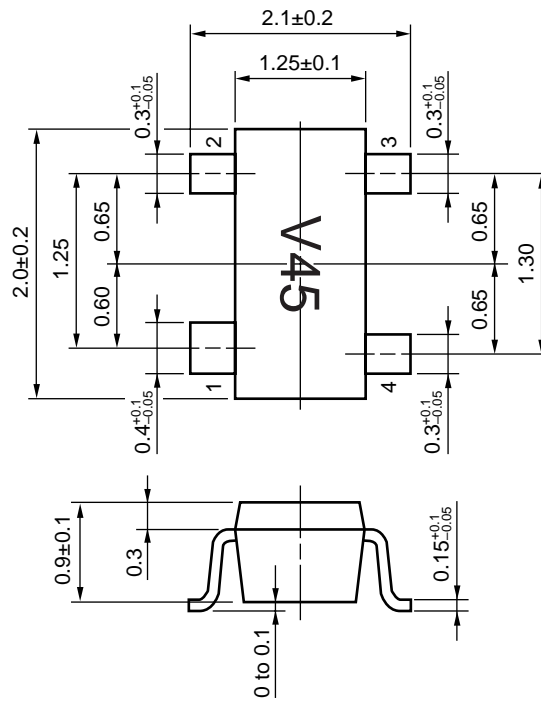

PIN CONNECTIONS

1. Emitter
2. Base
3. Emitter
4. Collector

PRECAUTION

Because this product uses high-frequency technology, sufficient care must be taken regarding static electricity and strong electric fields.

Take measures against static electricity and make sure the body is earthed when mounting the device.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your NEC sales representative.

Soldering Method	Soldering Conditions	Recommended Condition Symbol
Infrared Reflow	Package peak temperature: 240°C or below, Time: 30 seconds or less (at 210°C or higher), Count: 3 times or less, Exposure limit: None ^{Note}	IR40-00-3
Partial Heating	Pin temperature: 300°C or below, Time: 3 seconds or less (per side of device), Exposure limit: None ^{Note}	—

Note After opening the dry pack, store it at 25°C or less and 65% RH or less for the allowable storage period.

Caution Do not use different soldering methods together (except for partial heating).

For the details the recommended soldering conditions, refer to the document **SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL (C10535E)**.

[MEMO]

SAFETY INFORMATION ON THIS PRODUCT

<p>Caution</p>	<p>GaAs Products</p>	<p>The product contains gallium arsenide, GaAs. GaAs vapor and powder are hazardous to human health if inhaled or ingested.</p> <ul style="list-style-type: none"> • Do not destroy or burn the product. • Do not cut or cleave off any part of the product. • Do not crush or chemically dissolve the product. • Do not put the product in the mouth. <p>Follow related laws and ordinances for disposal. The product should be excluded from general industrial waste or household garbage.</p>
-----------------------	----------------------	---

- **The information in this document is current as of July, 2001. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

(1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
 (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4