

RX671 Group

Renesas Starter Kit+ for RX671
Smart Configurator Tutorial Manual
For e² studio

RENESAS 32-Bit MCU
RX Family / RX600 Series

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corp. without notice. Please review the latest information published by Renesas Electronics Corp. through various means, including the Renesas Electronics Corp. website (<http://www.renesas.com>).

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan

www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/.

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Disclaimer

By using this Renesas Starter Kit+ (RSK+), the user accepts the following terms:

The RSK+ is not guaranteed to be error free, and the entire risk as to the results and performance of the RSK+ is assumed by the User. The RSK+ is provided by Renesas on an "as is" basis without warranty of any kind whether express or implied, including but not limited to the implied warranties of satisfactory quality, fitness for a particular purpose, title and non-infringement of intellectual property rights with regard to the RSK+. Renesas expressly disclaims all such warranties. Renesas or its affiliates shall in no event be liable for any loss of profit, loss of data, loss of contract, loss of business, damage to reputation or goodwill, any economic loss, any reprogramming or recall costs (whether the foregoing losses are direct or indirect) nor shall Renesas or its affiliates be liable for any other direct or indirect special, incidental or consequential damages arising out of or in relation to the use of this RSK+, even if Renesas or its affiliates have been advised of the possibility of such damages.

Precautions

The following precautions should be observed when operating any RSK+ product:

This Renesas Starter Kit+ is only intended for use in a laboratory environment under ambient temperature and humidity conditions. A safe separation distance should be used between this and any sensitive equipment. Its use outside the laboratory, classroom, study area or similar such area invalidates conformity with the protection requirements of the Electromagnetic Compatibility Directive and could lead to prosecution.

The product generates, uses, and can radiate radio frequency energy and may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off or on, you are encouraged to try to correct the interference by one or more of the following measures;

- ensure attached cables do not lie across the equipment
- reorient the receiving antenna
- increase the distance between the equipment and the receiver
- connect the equipment into an outlet on a circuit different from that which the receiver is connected
- power down the equipment when not in use
- consult the dealer or an experienced radio/TV technician for help NOTE: It is recommended that wherever possible shielded interface cables are used.

The product is potentially susceptible to certain EMC phenomena. To mitigate against them it is recommended that the following measures be undertaken;

- The user is advised that mobile phones should not be used within 10m of the product when in use.
- The user is advised to take ESD precautions when handling the equipment.

The Renesas Starter Kit+ does not represent an ideal reference design for an end product and does not fulfil the regulatory standards for an end product.

How to Use This Manual

1. Purpose and Target Readers

This manual is designed to provide the user with an understanding of how to use Smart Configurator for RX together with the e² studio IDE to create a working project for the RSK+ platform. It is intended for users designing sample code on the RSK+ platform, using the many different incorporated peripheral devices.

The manual comprises of step-by-step instructions to generate code and import it into e² studio, but does not intend to be a complete guide to software development on the RSK+ platform. Further details regarding operating the RX671 microcontroller may be found in 'RX671 Group User's Manual: Hardware' and within the provided sample code. The setup procedure for the RSK+ Web installer is described in the Quick Start Guide.

Particular attention should be paid to the precautionary notes when using the manual. These notes occur within the body of the text, at the end of each section, and in the Usage Notes section.

In this manual, the display may differ slightly from screen shots. There is no problem in reading this manual.

The revision history summarizes the locations of revisions and additions. It does not list all revisions. Refer to the text of the manual for details.

The following documents apply to the RX671 Group. Make sure to refer to the latest versions of these documents. The newest versions of the documents listed may be obtained from the Renesas Electronics Web site.

Document Type	Description	Document Title	Document No.
User's Manual	Describes the technical details of the RSK+ hardware.	Renesas Starter Kit+ for RX671 User's Manual	R20UT4879EG
Tutorial Manual	Provides a guide to setting up RSK+ environment, running sample code and debugging programs.	Renesas Starter Kit+ for RX671 Tutorial Manual	R20UT4883EG
Quick Start Guide	Provides simple instructions to setup the RSK+ and run the first sample.	Renesas Starter Kit+ for RX671 Quick Start Guide	R20UT4884EG
Smart Configurator Tutorial	Provides a guide to code generation and importing into the e ² studio IDE.	Renesas Starter Kit+ for RX671 Smart Configurator Tutorial Manual	R20UT4885EG
Schematics	Full detail circuit schematics of the RSK+.	Renesas Starter Kit+ for RX671 Schematics	R20UT4878EG
Hardware Manual	Provides technical details of the RX671 microcontroller.	RX671 Group User's Manual: Hardware	R01UH0899EJ

2. List of Abbreviations and Acronyms

Abbreviation	Full Form
ADC	Analog-to-Digital Converter
API	Application Programming Interface
bps	bits per second
CMT	Compare Match Timer
COM	COMmunications port referring to PC serial port
CPU	Central Processing Unit
E1 / E2 Lite	Renesas On-chip Debugging Emulator
GUI	Graphical User Interface
IDE	Integrated Development Environment
IRQ	Interrupt Request
LCD	Liquid Crystal Display
LED	Light Emitting Diode
LSB	Least Significant Bit
LVD	Low Voltage Detect
MCU	Micro-controller Unit
MSB	Most Significant Bit
PC	Personal Computer
PLL	Phase-locked Loop
Pmod™	This is a Digilent Pmod™ Compatible connector. Pmod™ is registered to Digilent Inc. Digilent-Pmod_Interface_Specification
PSU	Power Supply Unit
RAM	Random Access Memory
ROM	Read Only Memory
RSK+	Renesas Starter Kit+
RTC	Real Time Clock
SCI	Serial Communications Interface
SPI	Serial Peripheral Interface
TFT	Thin Film Transistor
UART	Universal Asynchronous Receiver/Transmitter
USB	Universal Serial Bus
WDT	Watchdog Timer

All trademarks and registered trademarks are the property of their respective owners.

Table of Contents

1. Overview.....	8
1.1 Purpose.....	8
1.2 Features.....	8
2. Introduction.....	9
3. Project Creation with e ² studio.....	10
3.1 Introduction	10
3.2 Creating the Project	10
4. Smart Configurator Using the e ² studio	13
4.1 Introduction	13
4.2 Project Configuration using Smart Configurator	14
4.3 The 'Board' tabbed page.....	15
4.3.1 Board configuration page	15
4.4 The 'Clocks' tabbed page	16
4.4.1 Clocks configuration	16
4.5 The 'System' tabbed page	17
4.5.1 On-chip debug.....	17
4.6 The 'Components' tabbed page.....	18
4.6.1 Add a software component into the project.....	18
4.6.2 Compare Match Timer.....	19
4.6.3 Interrupt Controller	23
4.6.4 Ports	25
4.6.5 SCI/SCIF Asynchronous Mode	29
4.6.6 SPI Clock Synchronous Mode	32
4.6.7 Single Scan Mode S12AD.....	35
4.7 The 'Pins' tabbed page	38
4.7.1 Change pin assignment of a software component.....	38
4.8 Building the Project.....	41
5. User Code Integration.....	42
5.1 Project Settings.....	42
5.2 LCD Code Integration	43
5.2.1 SPI Code	44
5.2.2 CMT Code	45
5.3 Additional include paths	46
5.4 Switch Code Integration.....	47
5.4.1 Interrupt Code	47
5.4.2 De-bounce Timer Code	49
5.4.3 Main Switch and ADC Code.....	50
5.5 Debug Code Integration.....	55
5.6 UART Code Integration.....	55
5.6.1 SCI Code.....	55
5.6.2 Main UART code	56
5.7 LED Code Integration	59
6. Debugging the Project	61
7. Additional Information	63

1. Overview

1.1 Purpose

This RSK+ is an evaluation tool for Renesas microcontrollers. This manual describes how to use the e² studio IDE Smart Configurator plug-in to create a working project for the RSK+ platform.

1.2 Features

This RSK+ provides an evaluation of the following features:

- Project Creation with e² studio.
- Code generation using the Smart Configurator plug-in.
- User circuitry such as switches, LEDs and a potentiometer.

The RSK+ board contains all the circuitry required for microcontroller operation.

2. Introduction

This manual is designed to answer, in tutorial form, how to use the Smart Configurator plug-in for the RX family together with the e² studio IDE to create a working project for the RSK+ platform. The tutorials help explain the following:

- Project generation using e² studio
- Detailed use of the Smart Configurator plug-in for e² studio
- Integration with custom code
- Building the project in e² studio

The project generator will create a tutorial project with two selectable build configurations:

- 'HardwareDebug' is a project built with the debugger support included. Optimisation is set to zero.
- 'Release' is a project with optimised compile options (level two) and 'Outputs debugging information' option not selected, producing code suitable for release in a product.

The tutorial examples in this manual assume that installation procedures described in the RSK+ Quick Start Guide have been completed. Please refer to the Quick Start Guide for details of preparing the configuration.




These tutorials are designed to show you how to use the RSK+ and are not intended as a comprehensive introduction to the e² studio debugger, compiler toolchains or the E2 emulator Lite. Please refer to the relevant user manuals for more in-depth information.

3. Project Creation with e² studio


3.1 Introduction

In this section, the user will be guided through the steps required to create a new C project for the RX671 MCU, ready to generate peripheral driver code using Smart Configurator. This project generation step is necessary to create the MCU-specific source, project and debug files.


3.2 Creating the Project

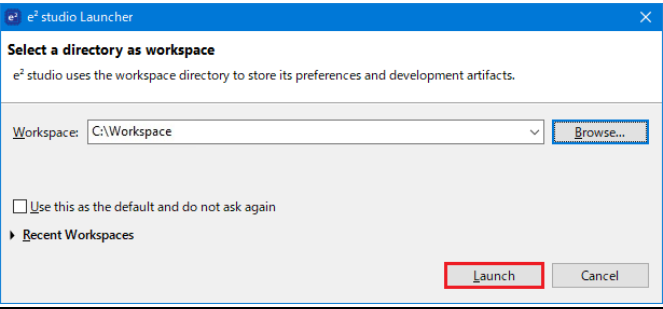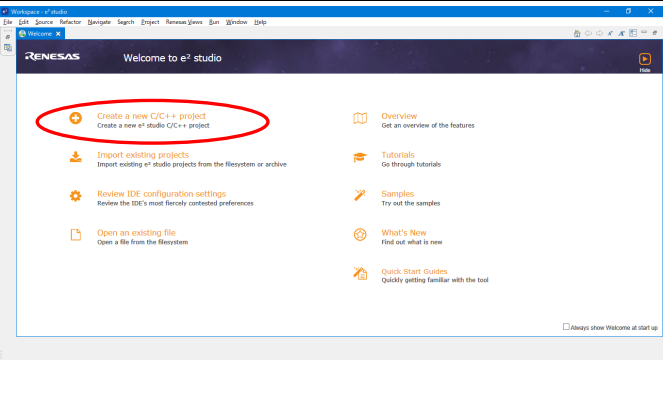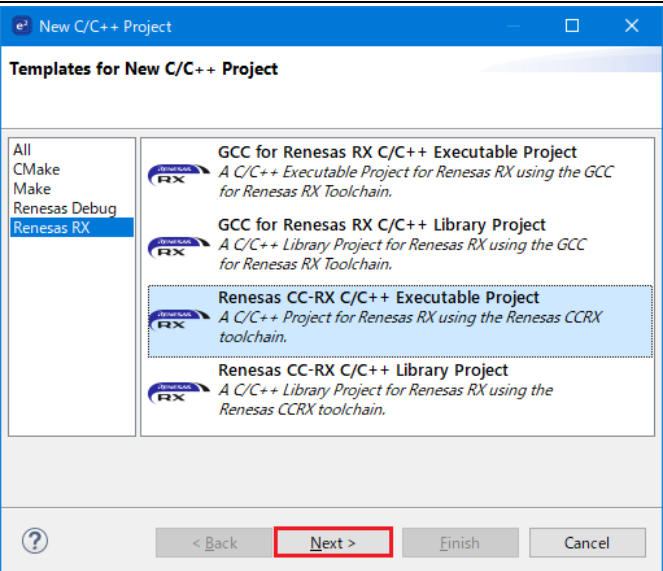Start e² studio and select a suitable location for the project workspace.	
In the Welcome page, click 'Create a new C/C++ project'. (The Welcome page can also be opened from 'Help'-'>' 'Welcome'.)	
- In the 'Templates for New C/C++ Project' dialog, selecting 'Renesas RX' -> 'Renesas CC-RX C/C++ Executable Project'. - Click 'Next'.	


- Enter the project name 'SC_Tutorial'. Click 'Next'.





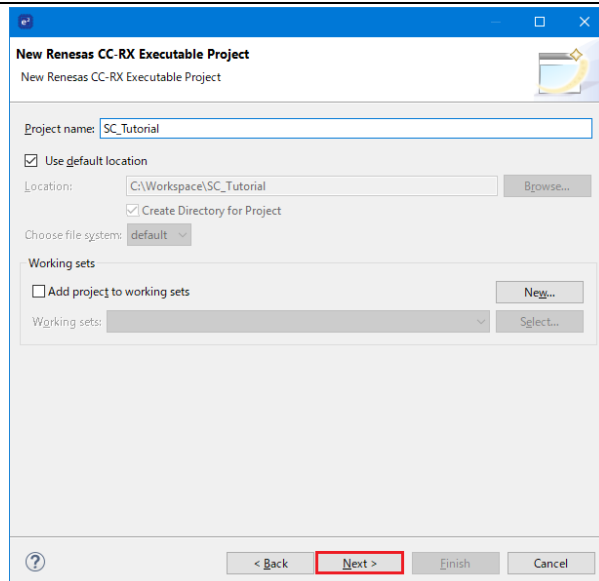


- In the 'Select toolchain, device & debug settings' dialog, select the options as shown in the screenshot opposite.
- In 'Toolchains' choose 'Renesas CCRX'.
- The R5F5671EHxFB MCU is found under RX600 -> RX671 -> RX671 - 144 pin.
- Select 'E2 Lite (RX)' from the pulldown and check 'Create Release Configuration' check box.
- Click 'Next'.

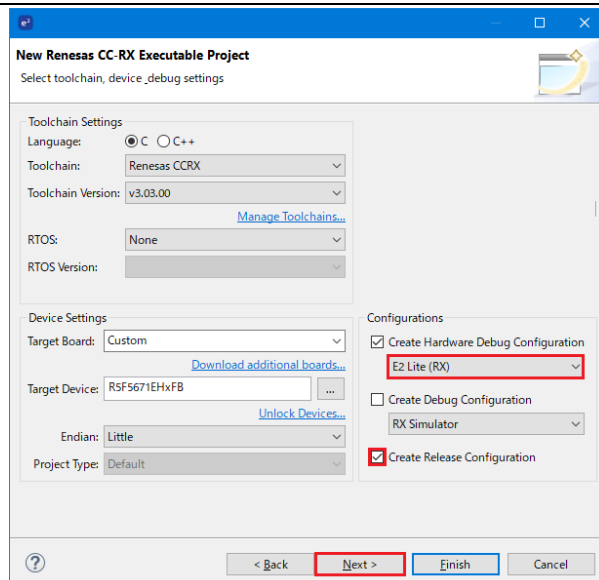

- In the 'Select Coding Assistant settings' dialog, select 'Smart Configurator'.
- Click 'Next'.

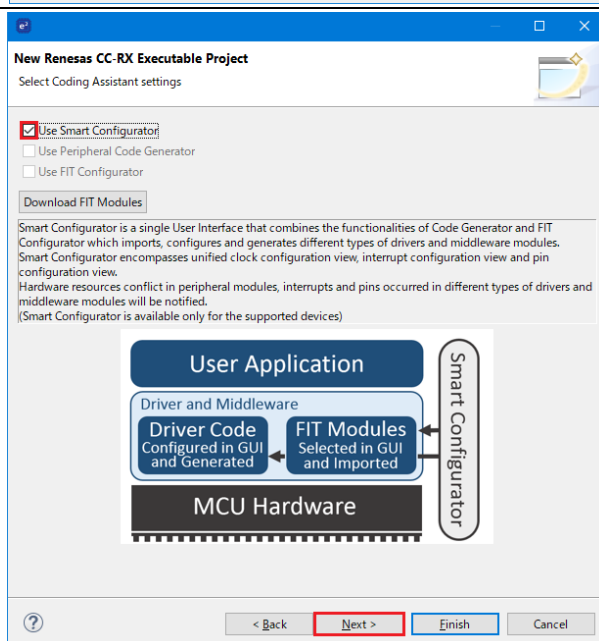

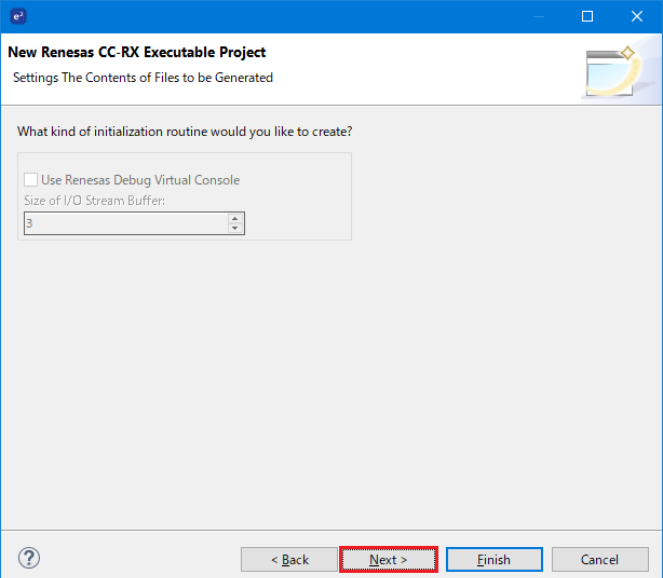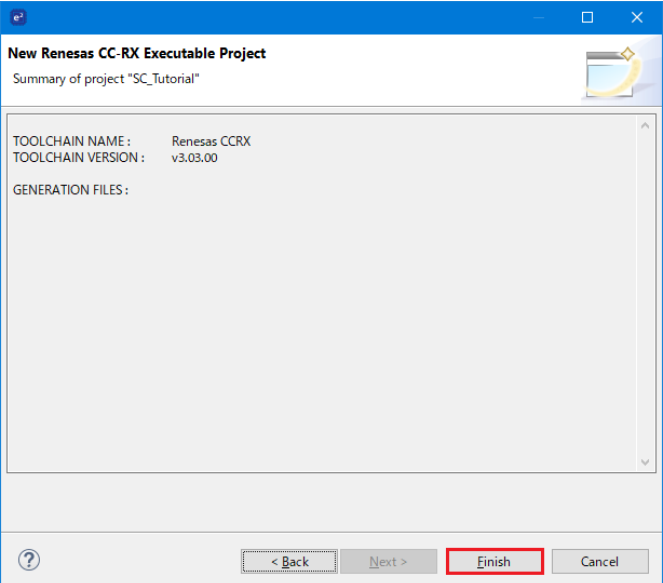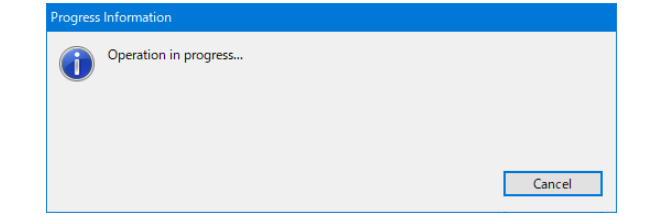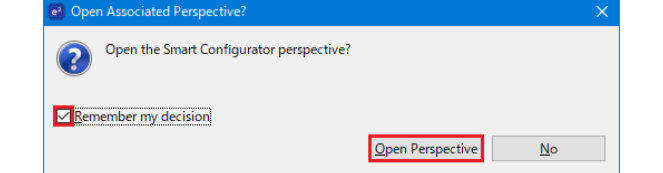Click 'Next'.	 The screenshot shows the 'New Renesas CC-RX Executable Project' dialog box. The title bar says 'New Renesas CC-RX Executable Project'. Below the title bar, it says 'Settings The Contents of Files to be Generated'. The main area has a question 'What kind of initialization routine would you like to create?' and a checkbox 'Use Renesas Debug Virtual Console'. Below that is a 'Size of I/O Stream Buffer:' label and a spinner box set to '3'. At the bottom, there are buttons: '< Back', 'Next >' (highlighted with a red rectangle), 'Finish', and 'Cancel'.
A summary dialog will appear, click 'Finish' to complete the project generation.	 The screenshot shows the 'New Renesas CC-RX Executable Project' dialog box in the 'Summary' tab. The title bar says 'New Renesas CC-RX Executable Project'. Below the title bar, it says 'Summary of project "SC_Tutorial"'. The main area shows 'TOOLCHAIN NAME: Renesas CCRX' and 'TOOLCHAIN VERSION: v3.03.00'. Below that is a section for 'GENERATION FILES:'. At the bottom, there are buttons: '< Back', 'Next >', 'Finish' (highlighted with a red rectangle), and 'Cancel'.
Wait for file generation to start.	 The screenshot shows a 'Progress Information' dialog box. It has a blue header bar with the text 'Progress Information'. Below the header bar, there is an information icon and the text 'Operation in progress...'. At the bottom right, there is a 'Cancel' button.
In future, to skip the pop-up message on the right, check the 'Remember my decision' check box and click on 'Open Perspective'.	 The screenshot shows an 'Open Associated Perspective?' dialog box. It has a blue header bar with the text 'Open Associated Perspective?'. Below the header bar, there is a question mark icon and the text 'Open the Smart Configurator perspective?'. Below that is a checkbox labeled 'Remember my decision' which is checked. At the bottom right, there are buttons: 'Open Perspective' (highlighted with a red rectangle) and 'No'.
The perspective changes automatically when the Smart Configurator starts up.	 The screenshot shows the e2 studio IDE interface. The top bar has icons for 'C/C++', 'Debug', and 'Smart Configurator'. The 'Smart Configurator' icon is highlighted. Below the top bar, there is a toolbar with icons for 'SC_Tutorial.scfg' and a close button 'X'.

4. Smart Configurator Using the e² studio

4.1 Introduction

The Smart Configurator plug-in for the RX671 has been used to generate the sample code discussed in this document. Smart Configurator for e² studio is a plug-in tool for generating template 'C' source code and project settings for the RX671. When using Smart Configurator, it provides the user with a visual way of configuring the target device, clocks, software components, hardware resources and interrupts for the project; thereby bypassing the need, in most cases, to refer to sections of the Hardware Manual.

Once the user has configured the project, the 'Generate Code' function is used to generate three code modules for each specific MCU feature selected. These code modules are named 'Config_xxx.h', 'Config_xxx.c', and 'Config_xxx_user.c', where 'xxx' is an acronym for the relevant MCU feature, for example 'S12AD'. Within these code modules, the user is then free to add custom code to meet their specific requirement. However, these files require custom code to be added between the following comment delimiters:

```
/* Start user code for adding. Do not edit comment generated here */
/* End user code. Do not edit comment generated here */
```

Smart Configurator will locate these comment delimiters, and preserve any custom code inside the delimiters on subsequent code generation operations. This is useful if, after adding custom code, the user needs to re-visit Smart Configurator to change any MCU operating parameters.

Note: If code is added outside the above user code area, it will be lost if code generation is executed again with Smart Configurator.

By following the steps detailed in this Tutorial, the user will generate an e² studio project called SC_Tutorial. The fully completed Tutorial project is contained in the RSK+ Web Installer (<https://www.renesas.com/rskrx671/install/e2>) and may be imported into e² studio by following the steps in the Quick Start Guide. This Tutorial is intended as a learning exercise for users who wish to use the Smart Configurator to generate their own custom projects for e² studio.

The SC_Tutorial project uses interrupts for switch inputs, the ADC module, the Compare Match Timer (CMT), the Serial Communications Interface (SCI) and uses these modules to perform A/D conversion. Results are displayed via the virtual COM port in a terminal program and also on the PMOD display connected to the RSK+.

Following a tour of the key user interface features of Smart Configurator in the tabbed pages (board, clocks, components and pins), as well as a demonstration of building a project, the reader is guided through each of the peripheral function configuration pages and familiarised with the structure of the template code, including the process of adding their own code to the user code areas provided by the Smart Configurator

4.2 Project Configuration using Smart Configurator

In this section, a brief tour of Smart Configurator is presented. For further details of the Smart Configurator paradigm and reference, refer to the RX Smart Configurator User's Guide: e² studio.

You can download the latest document from: <https://www.renesas.com/smart-configurator>.

The Smart Configurator initial view is displayed as illustrated in **Figure 4-1**.

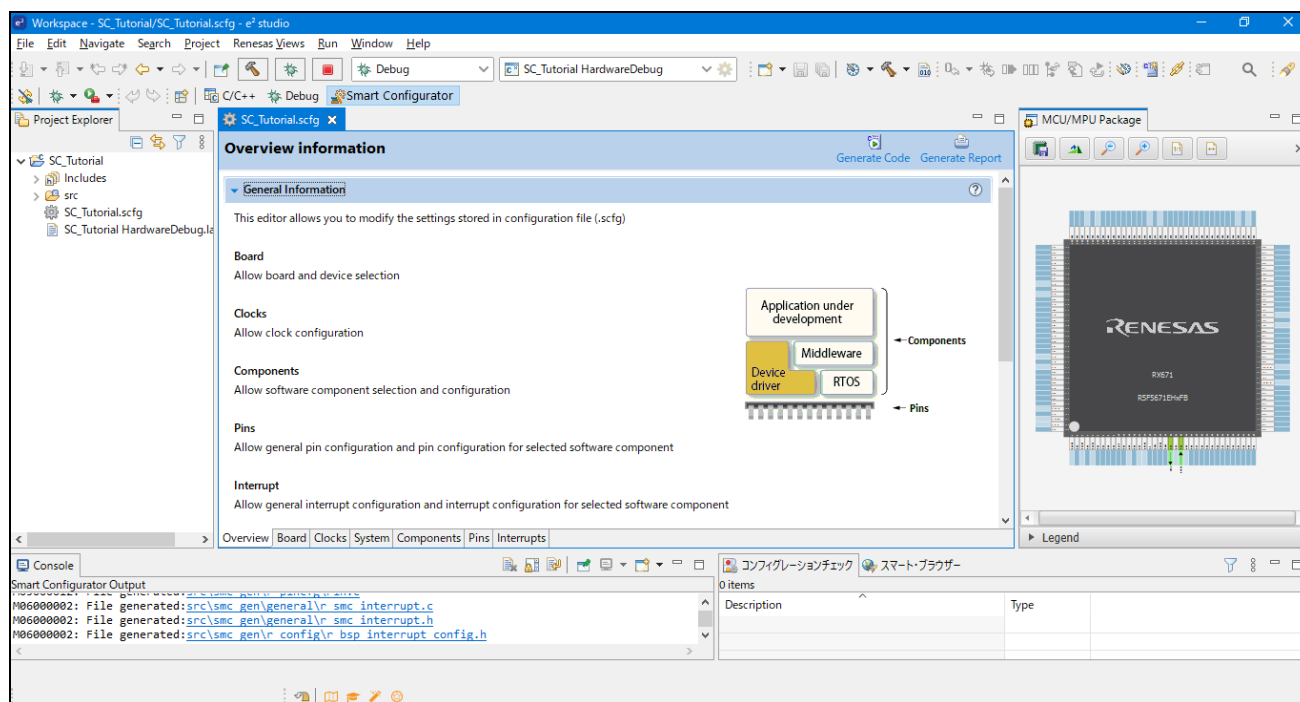


Figure 4-1 Overview page

Smart Configurator provides GUI features for configuration of MCU sub systems. Once the user has configured all required MCU sub systems and peripherals, the user can click the 'Generate Code' button, resulting in a fully configured e² studio project that builds and runs without error.

4.3 The 'Board' tabbed page

On the 'Board' tabbed page, set the board type and device type.
Click the 'Board' tab and it will be displayed as shown in **Figure 4-2**.

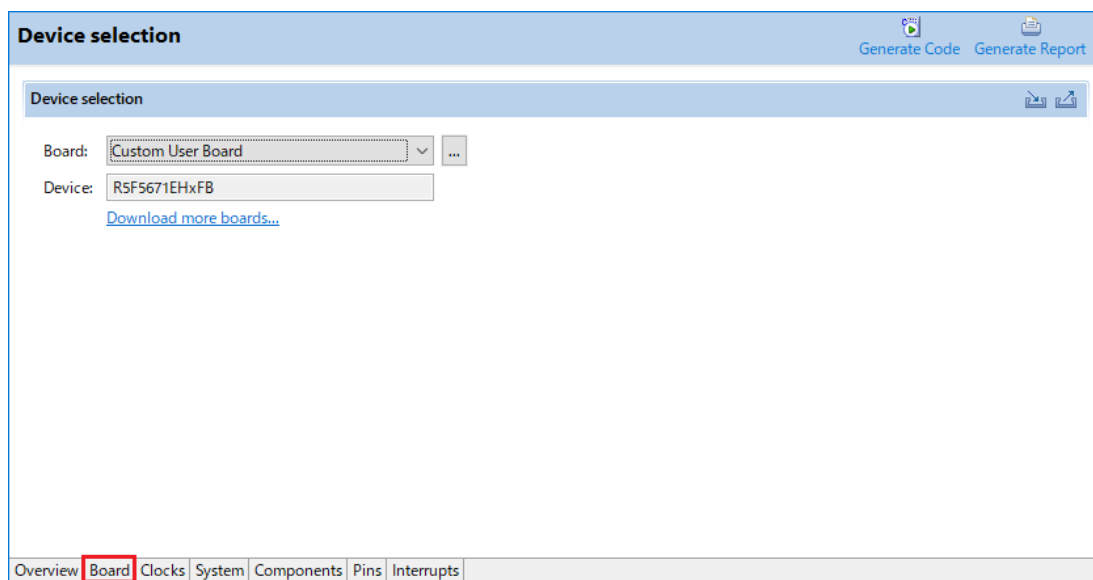


Figure 4-2 Board configuration page

4.3.1 Board configuration page

Make sure that 'Custom User Board' is selected for the 'board:'.

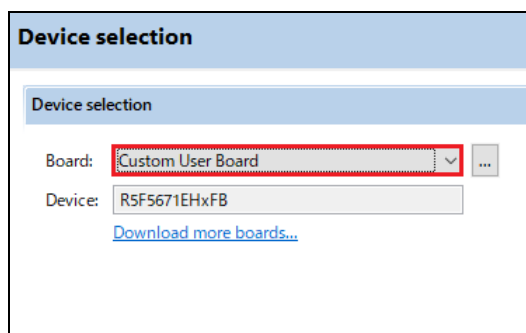


Figure 4-3 Select board

4.4 The 'Clocks' tabbed page

The 'Clocks' tabbed page configures clocks of the device selected. Clock source, frequency, PLL settings and clock divider settings can be configured for the output clocks. Clock configurations will be reflected in the `r_bsp_config.h` file in `\src\smc_gen\r_config`.

4.4.1 Clocks configuration

Figure 4-4 shows a screenshot of Smart Configurator with the Clocks configurations. Click on the 'Clocks' tab. Configure the system clocks as shown in the figure. In this tutorial, we are using the on board 24 MHz crystal resonator for our main clock oscillation source and the PLL circuit is in operation. The PLL output is used as the main system clock and the divisors should be set as shown in **Figure 4-4**.

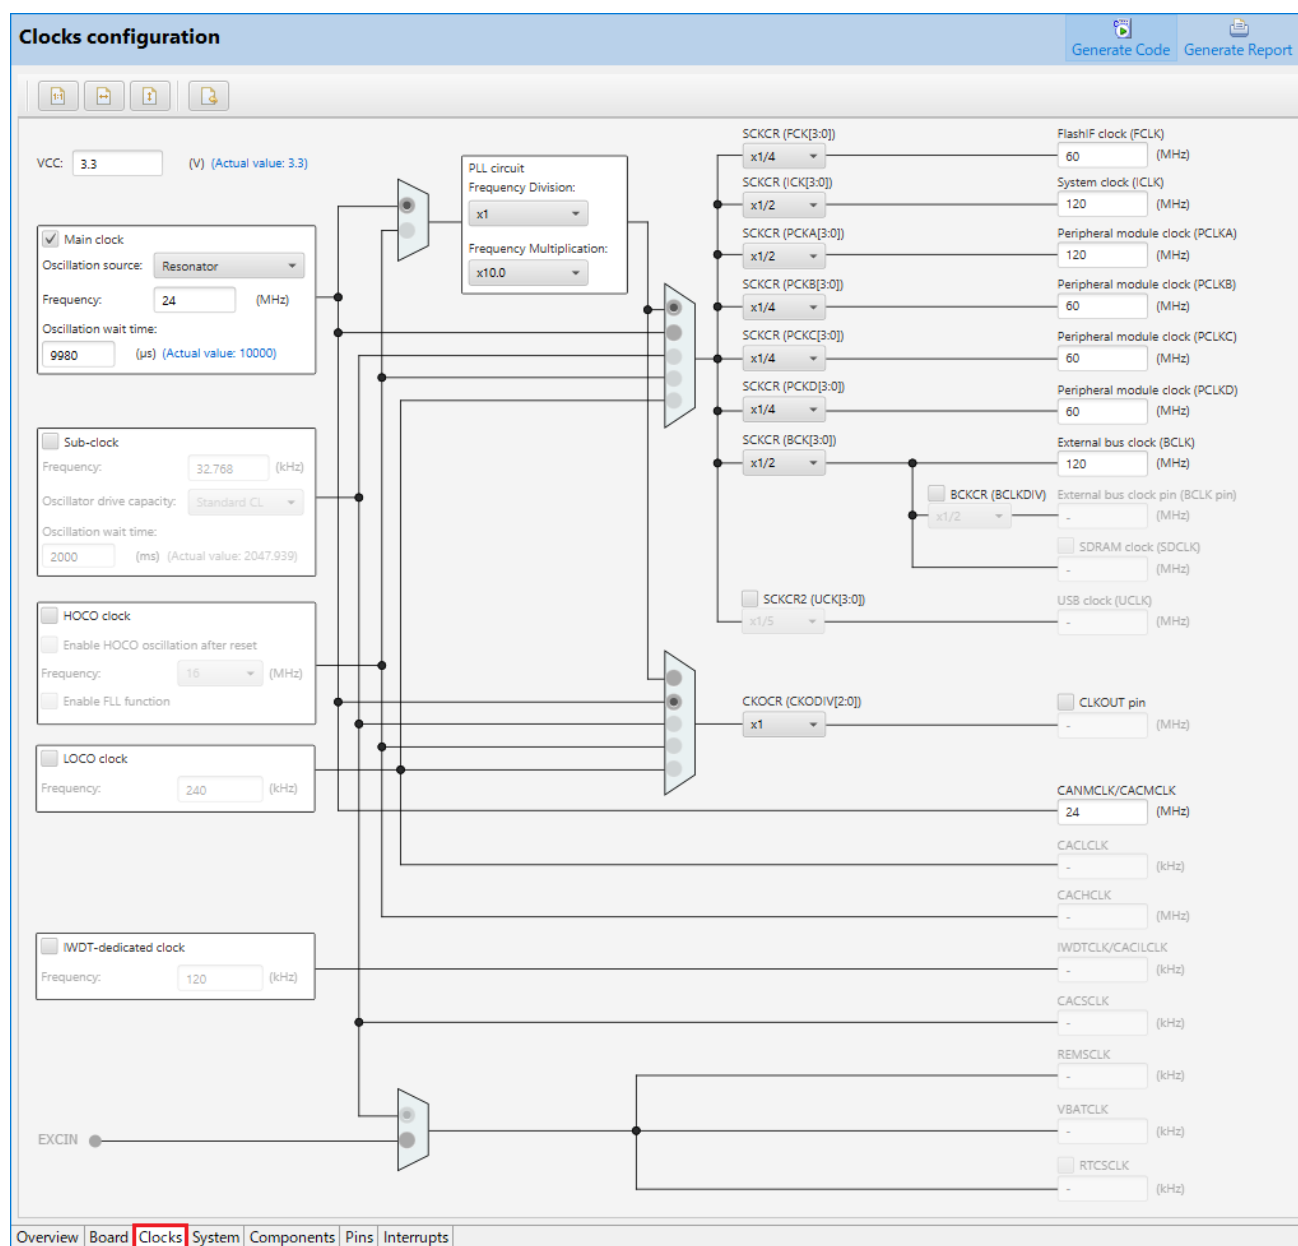


Figure 4-4 The 'Clocks' tabbed page

4.5 The 'System' tabbed page

Set the On-chip debug setting mode on the 'System' tabbed page.

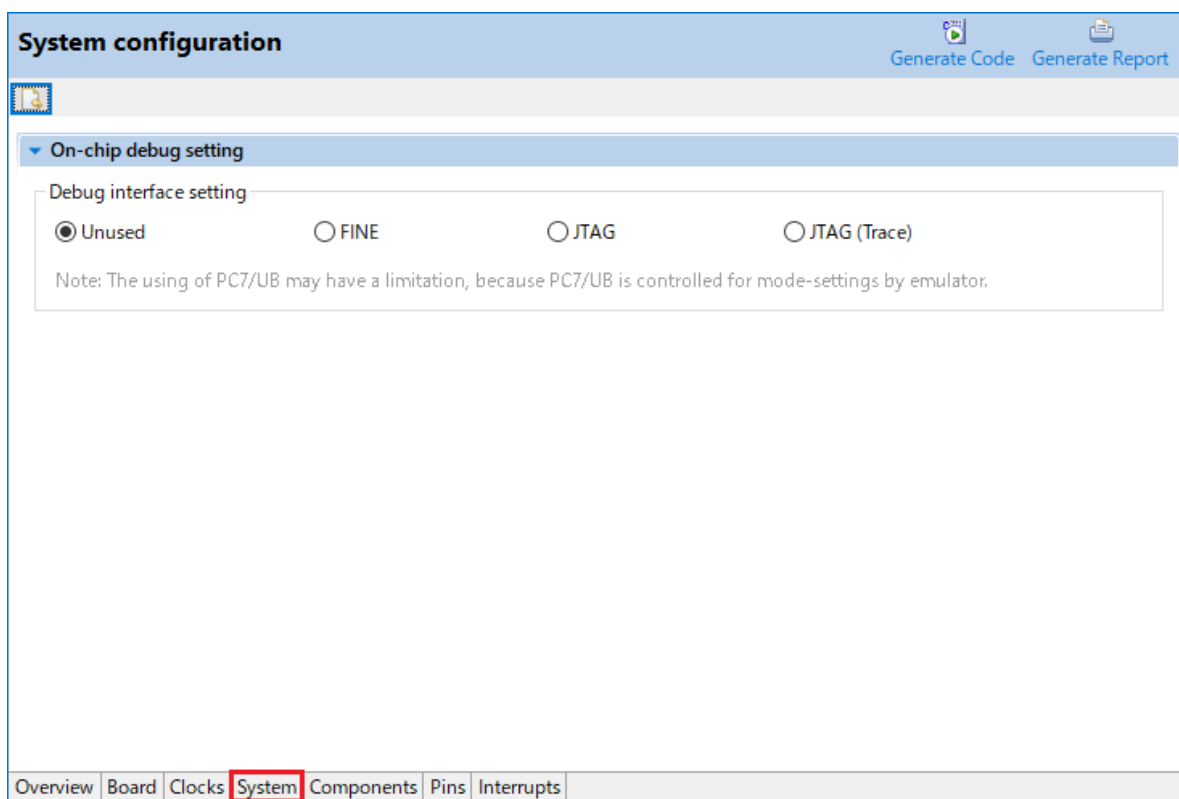


Figure 4-5 The 'System' tabbed page

4.5.1 On-chip debug

The On-chip debug settings set the interface used for debugging. For the RSK+RX671 CPU board, select JTAG as shown in **Figure 4-6**.



Figure 4-6 Debug interface setting

4.6 The 'Components' tabbed page

Drivers and middleware are handled as software components in Smart Configurator. The 'Components' page allows the user to select and configure software components.

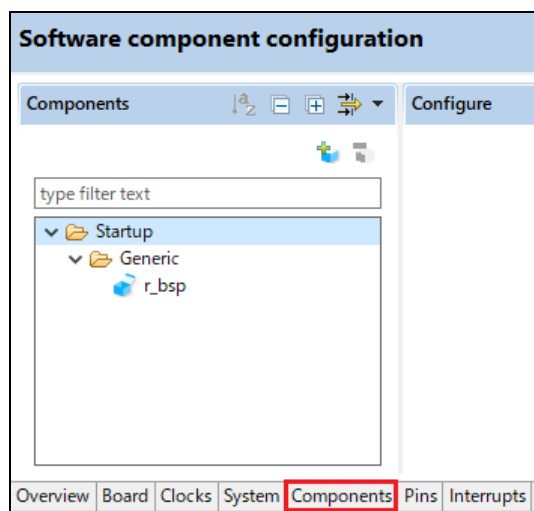


Figure 4-7 Components page

4.6.1 Add a software component into the project

Smart Configurator supports five types of software components: Startup, Drivers, Middleware, Application and RTOS. In the following sub-sections, the reader is guided through the steps to configure the MCU for a simple project containing interrupts for switch inputs, timers, ADC and a SCI by component of Drivers.

Click the 'Add component'  icon.

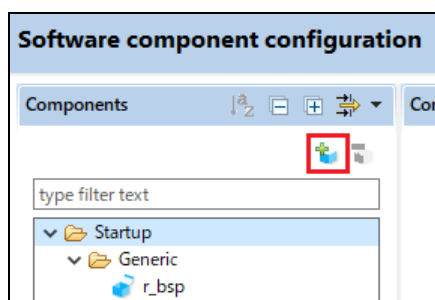


Figure 4-8 Add a Software component (1)

In 'Software Component Selection' dialog -> Type, select 'Drivers'.

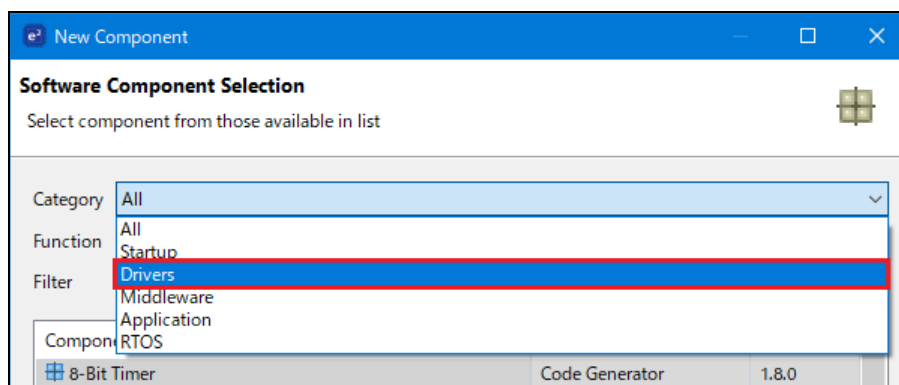


Figure 4-9 Add a Software component (2)

4.6.2 Compare Match Timer

CMT0 will be used as an interval timer for generation of accurate delays. CMT1 and CMT2 will be used as timers in de-bouncing of switch interrupts.

Select 'Compare Match Timer' as shown in **Figure 4-10** below then click 'Next'.

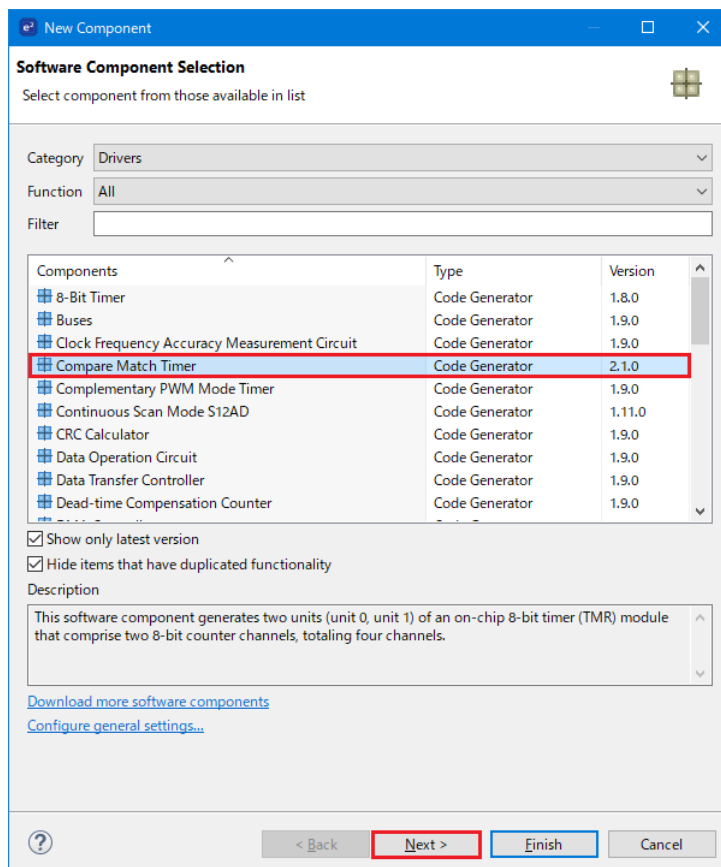


Figure 4-10 Select Compare Match Timer

In 'Add new configuration for selected component' dialog -> Resource, select 'CMT0' as shown in **Figure 4-11** below.

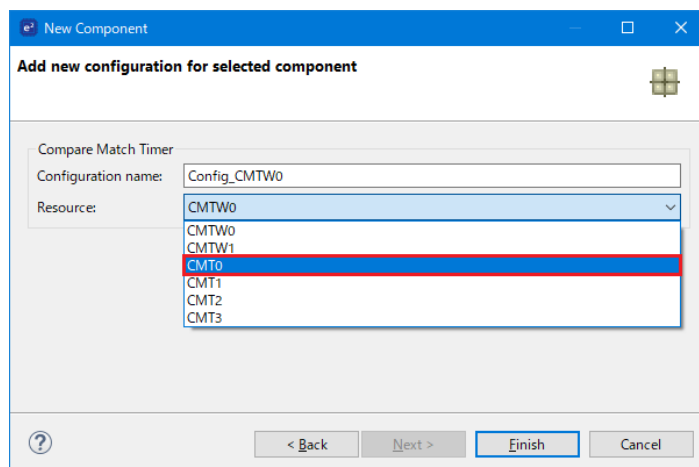


Figure 4-11 Select Resource - CMT0

Ensure that the 'Configuration name' updates to 'Config_CMT0' as shown in **Figure 4-12** below then click 'Finish'.

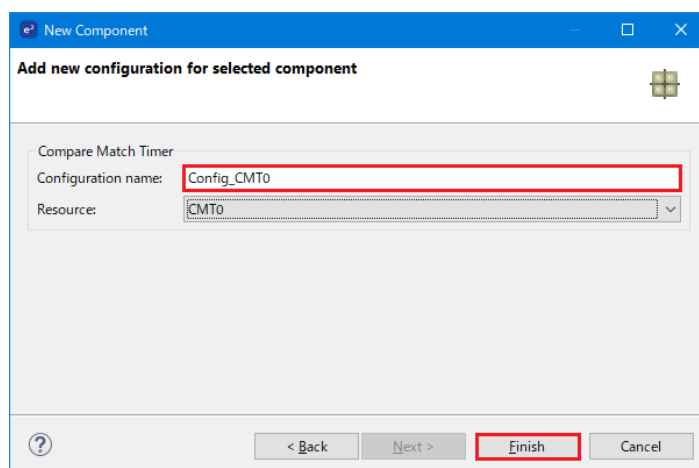


Figure 4-12 Ensure Configuration name - CMT0

In 'Config_CMT0', configure CMT0 as shown in **Figure 4-13**. This timer is configured to generate a high priority interrupt every 1ms. We will use this interrupt later in the tutorial to provide an API for generating high accuracy delays required in our application.

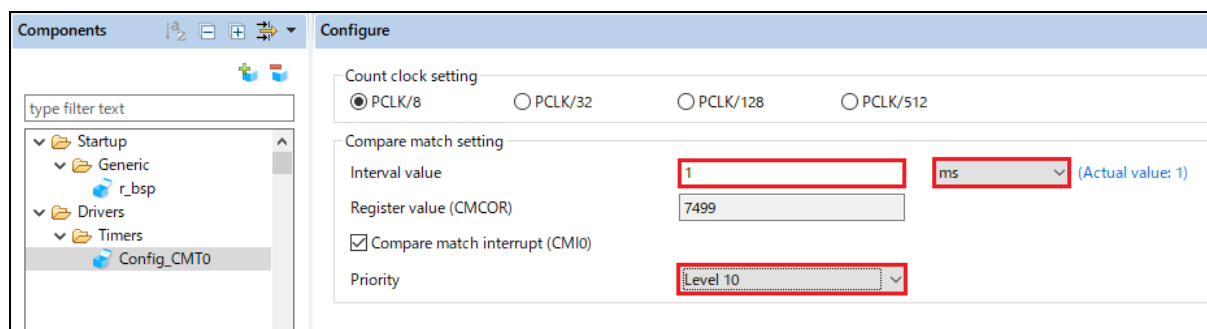


Figure 4-13 Config_CMT0 setting

Click the 'Add component'  icon. In 'Software Component Selection' dialog -> Type, select 'Drivers'. Select 'Compare Match Timer' then click 'Next'. In 'Add new configuration for selected component' dialog -> Resource, select 'CMT1' as shown in **Figure 4-14** below.

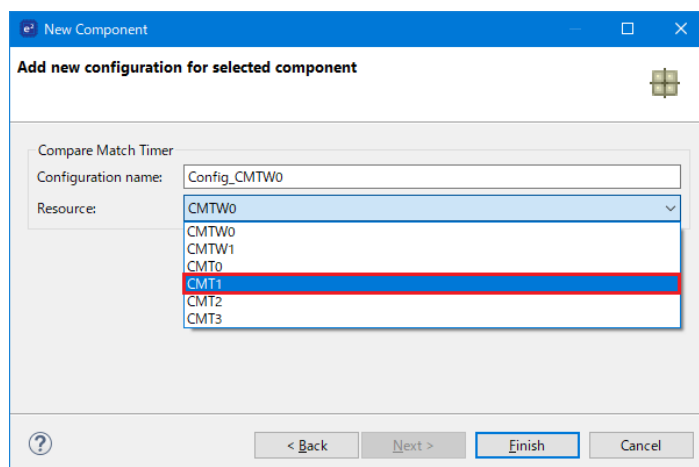


Figure 4-14 Select Resource – CMT1

Ensure that the 'Configuration name' updates to 'Config_CMT1' as shown in **Figure 4-15** below then click 'Finish'.

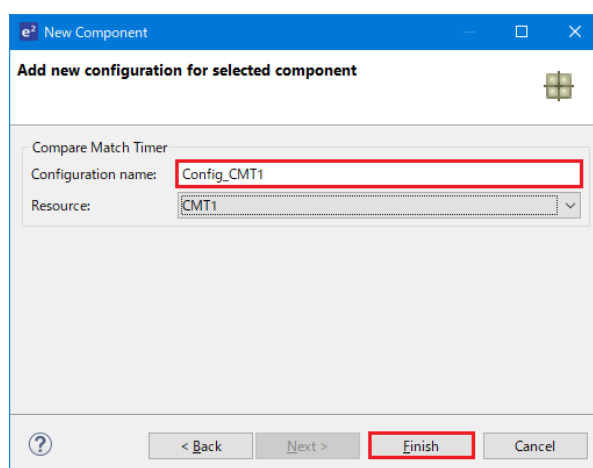


Figure 4-15 Ensure Configuration name – CMT1

Navigate to the 'Config_CMT1' and configure CMT1 as shown in **Figure 4-16**. This timer is configured to generate a high priority interrupt after 20ms. This timer is used as our short switch de-bounce timer later in this tutorial.

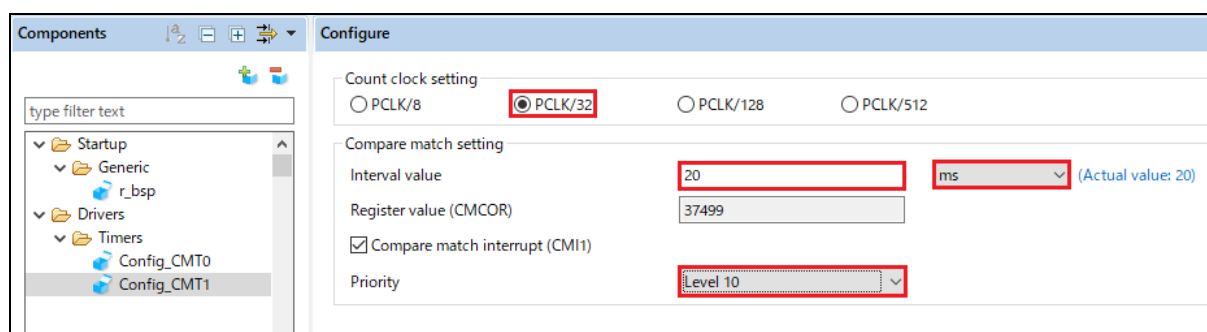


Figure 4-16 Config_CMT1 setting

Click the 'Add component'  icon. In 'Software Component Selection' dialog -> Type, select 'Drivers'. Select 'Compare Match Timer' then click 'Next'. In 'Add new configuration for selected component' dialog -> Resource, select 'CMT2' as shown in **Figure 4-17** below.

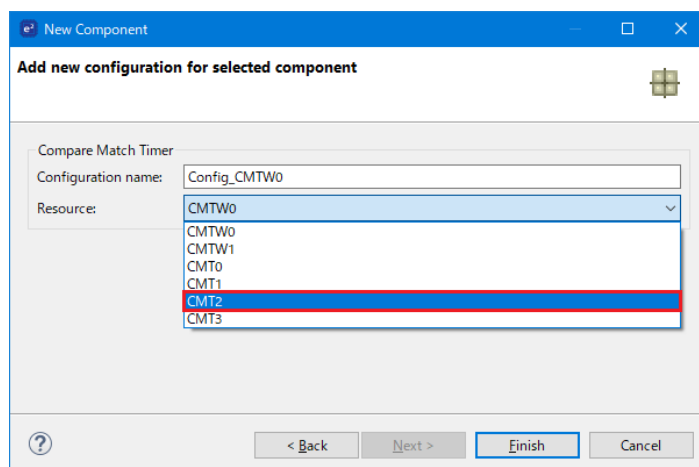


Figure 4-17 Select Resource – CMT2

Ensure that the 'Configuration name' updates to 'Config_CMT2' as shown in **Figure 4-18** below then click 'Finish'.

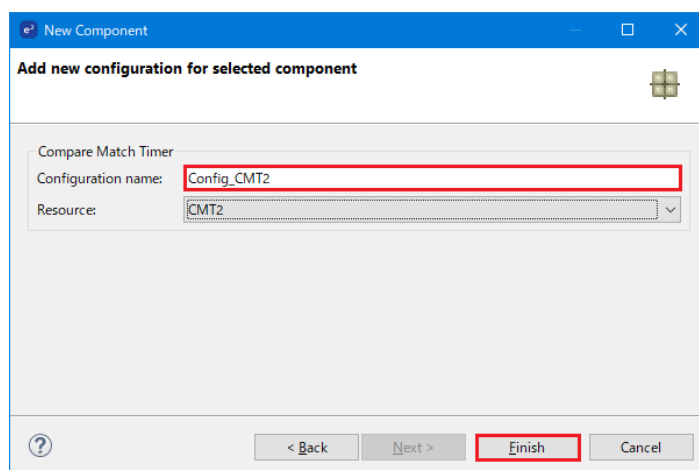


Figure 4-18 Ensure Configuration name – CMT2

Navigate to the 'Config_CMT2' and configure CMT2 as shown in **Figure 4-19**. This timer is configured to generate a high priority interrupt after 200ms. This timer is used as our long switch de-bounce timer later in this tutorial.

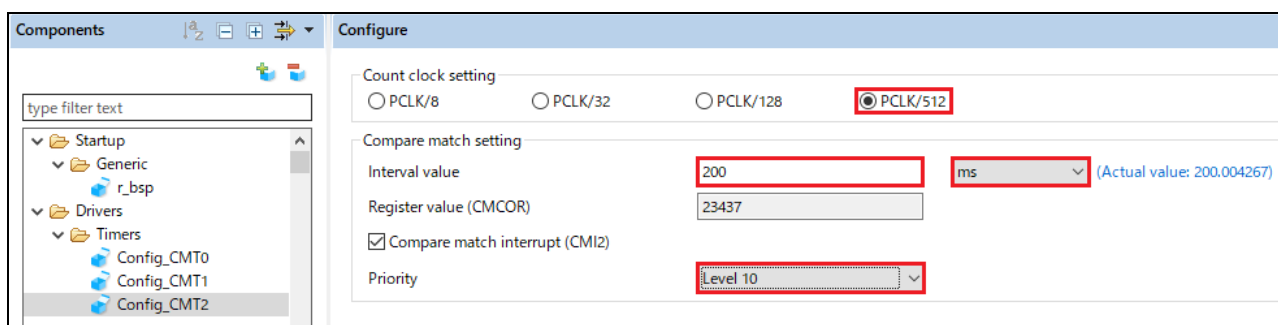


Figure 4-19 Config_CMT2 setting

4.6.3 Interrupt Controller

Referring to the RSK+ schematic, SW1 is connected to IRQ9(P91) and SW2 is connected to IRQ10(P92). SW3 is connected to IRQ15(P07) and ADTRG0n. This tutorial uses ADTRG0n, which will be configured later in §4.6.7.

Click the 'Add component'  icon. In 'Software Component Selection' dialog -> Type, select 'Drivers'. Select 'Interrupt Controller' as shown in **Figure 4-20** then click 'Next'.

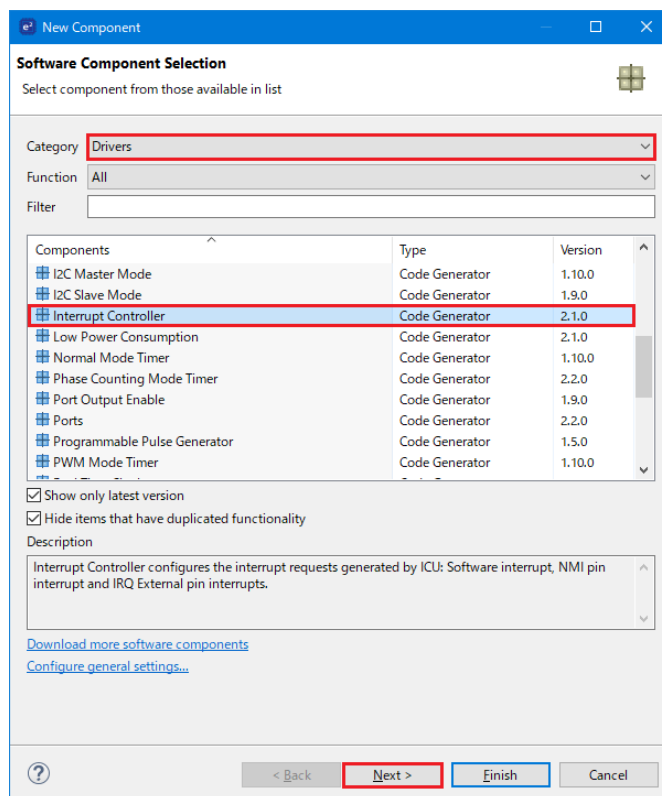


Figure 4-20 Select Interrupt Controller

In 'Add new configuration for selected component' dialog -> Resource, select 'ICU' as shown in **Figure 4-21** below then click 'Finish'.

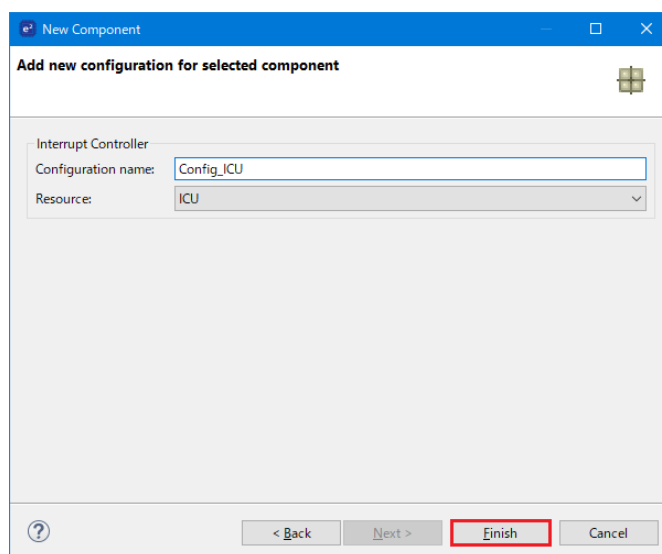


Figure 4-21 Select Resource – ICU

Navigate to the 'Config_ICU', configure these two interrupts as falling edge triggered as shown in **Figure 4-22** below.

The screenshot displays the Smart Configurator interface for the RX671. On the left, the 'Components' pane shows a tree structure with 'Config_ICU' selected under the 'Interrupt' category. The main 'Configure' pane on the right shows settings for various interrupts. The 'Software interrupt setting' section is at the top, followed by 'NMI pin interrupt setting'. Below these are sections for IRQ0 through IRQ15. IRQ9 and IRQ10 are checked, and their 'Detection type' is set to 'Falling edge' (highlighted with a red box). Their 'Priority' is set to 'Level 15 (highest)'. All other interrupts (IRQ0-8, IRQ11-15) are unchecked and have a 'Detection type' of 'Low level'.

Interrupt	Enabled	Detection type	Digital filter	Priority
Software interrupt	☐			Level 15 (highest)
Software interrupt 2	☐			
NMI pin interrupt	☐	Falling edge	No filter	Level 15 (highest)
IRQ0	☐	Low level	No filter	Level 15 (highest)
IRQ1	☐	Low level	No filter	Level 15 (highest)
IRQ2	☐	Low level	No filter	Level 15 (highest)
IRQ3	☐	Low level	No filter	Level 15 (highest)
IRQ4	☐	Low level	No filter	Level 15 (highest)
IRQ5	☐	Low level	No filter	Level 15 (highest)
IRQ6	☐	Low level	No filter	Level 15 (highest)
IRQ7	☐	Low level	No filter	Level 15 (highest)
IRQ8	☐	Low level	No filter	Level 15 (highest)
IRQ9	☒	Falling edge	No filter	Level 15 (highest)
IRQ10	☒	Falling edge	No filter	Level 15 (highest)
IRQ11	☐	Low level	No filter	Level 15 (highest)
IRQ12	☐	Low level	No filter	Level 15 (highest)
IRQ13	☐	Low level	No filter	Level 15 (highest)
IRQ14	☐	Low level	No filter	Level 15 (highest)
IRQ15	☐	Low level	No filter	Level 15 (highest)

Figure 4-22 Config_ICU setting

4.6.4 Ports

Referring to the RSK+ schematic, LED0 is connected to P17, LED1 is connected to PF5, LED2 is connected to P03 and LED3 is connected to P05. PJ3 is used as one of the LCD control lines, together with P74, P71 and P72.

Click the 'Add component'  icon. In 'Software Component Selection' dialog -> Type, select 'Drivers'. Select 'Ports' as shown in **Figure 4-23** then click 'Next'.

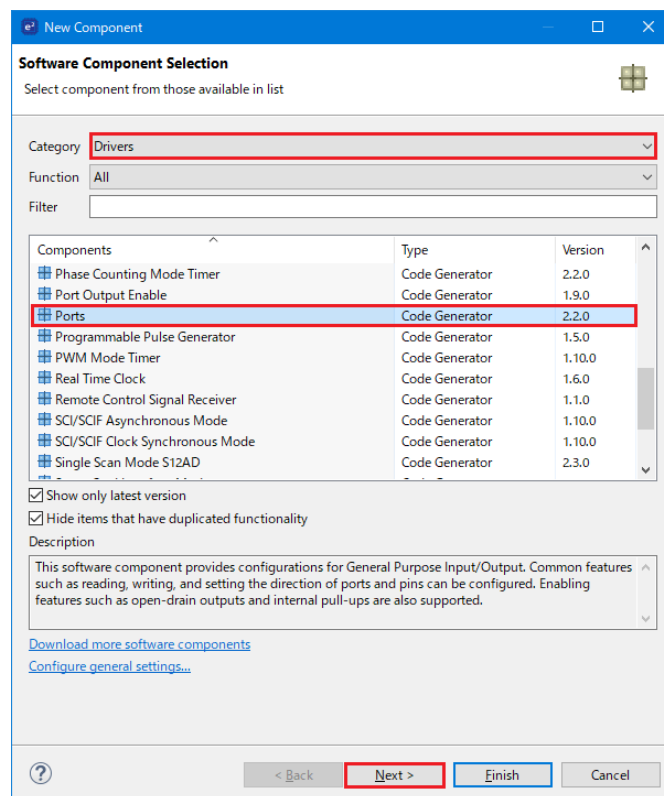


Figure 4-23 Select Ports

In 'Add new configuration for selected component' dialog -> Resource, select 'PORT' as shown in **Figure 4-24** below then click 'Finish'.

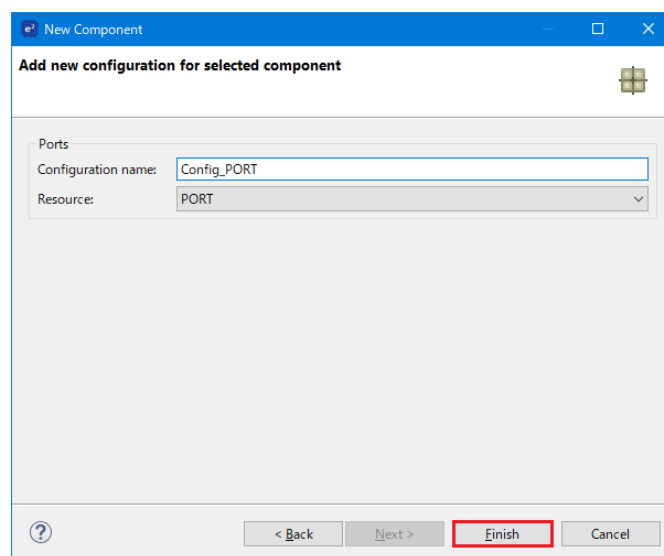


Figure 4-24 Select Resource – PORT

Tick the tickboxes for 'PORT0', 'PORT1', 'PORT7', 'PORTF' and 'PORTJ' as shown in **Figure 4-25** below.

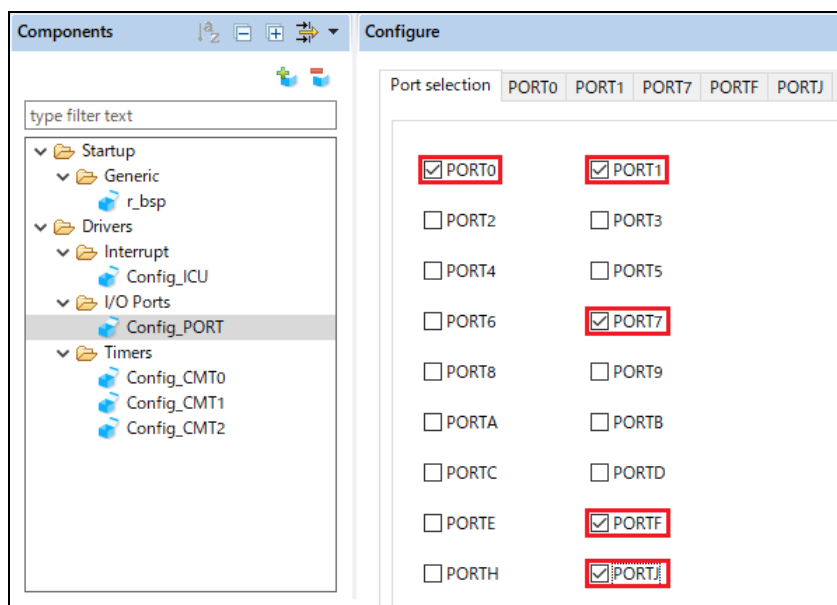


Figure 4-25 Select Port selection

Navigate through each of the 'PORTx' tabs, configuring these four I/O lines and LCD control lines as shown in **Figure 4-26**, **Figure 4-27**, **Figure 4-28**, **Figure 4-29** and **Figure 4-30** below. Tick the tickboxes for 'Out' and tick 'Output 1' the tickboxes except for P72 under the 'PORT7' tab. Start with the 'PORT0' tab.

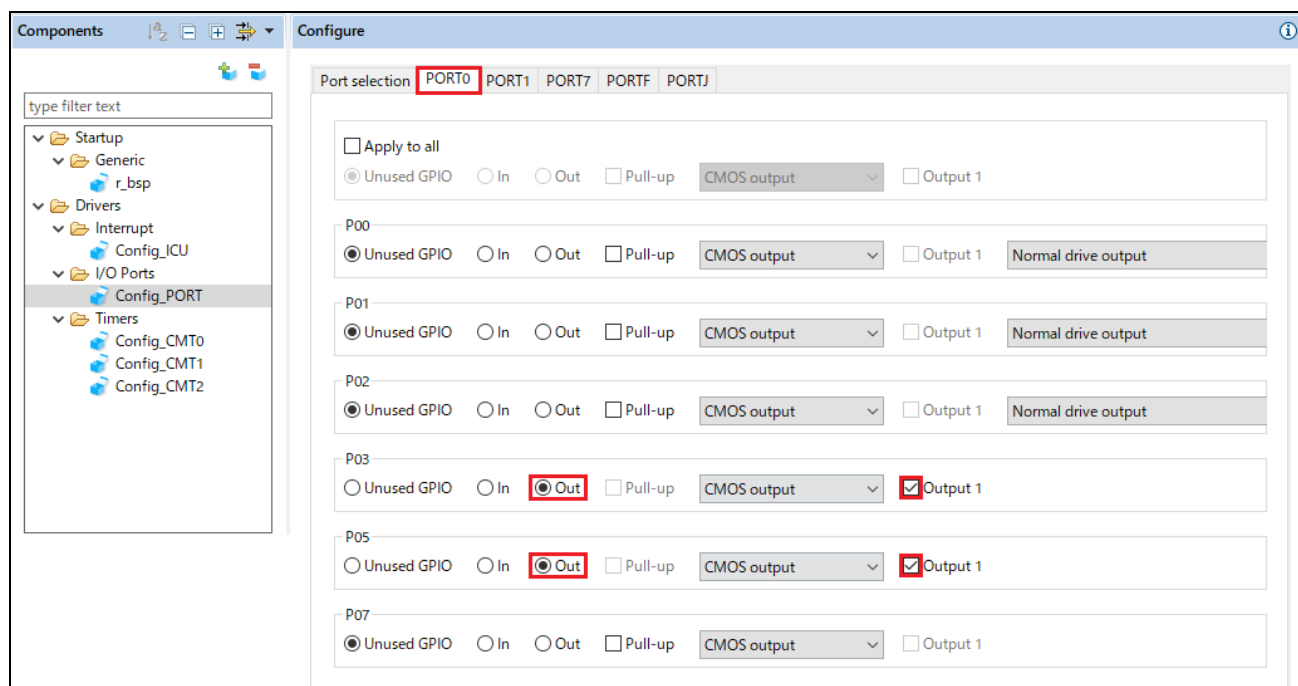


Figure 4-26 Select PORT0 tab

Select 'PORT1' tab.

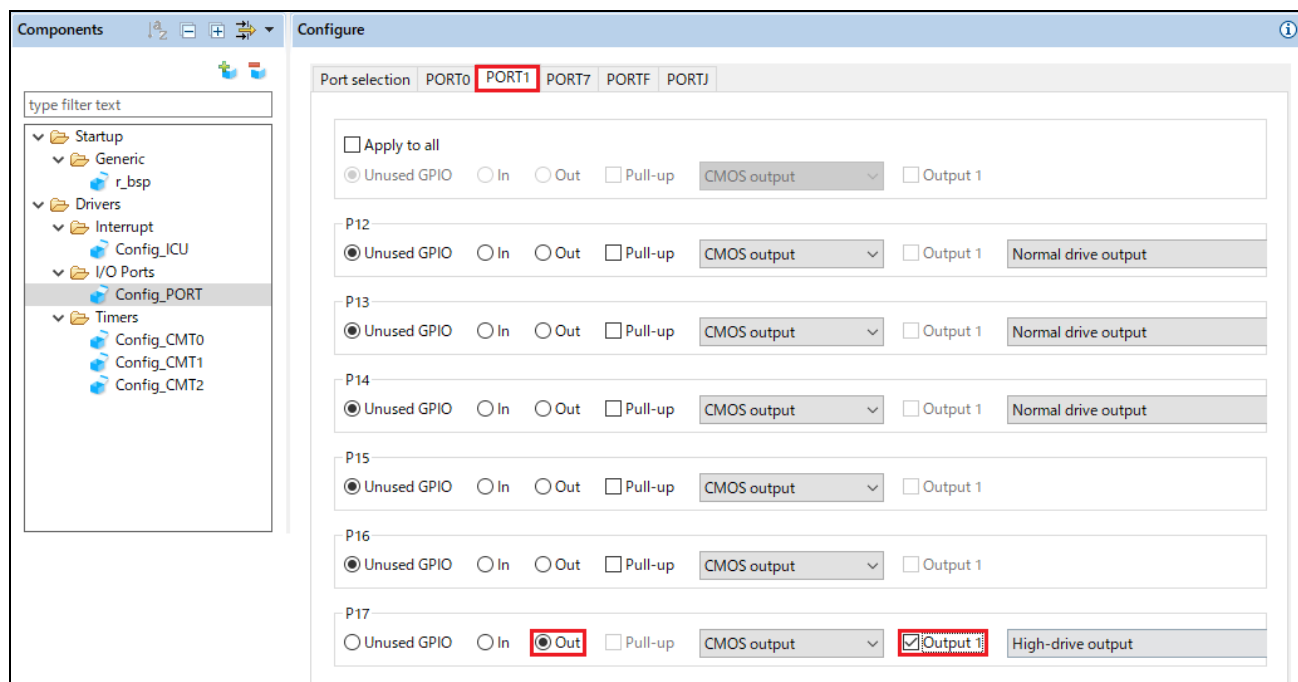


Figure 4-27 Select PORT1 tab

Select 'PORT7' tab.

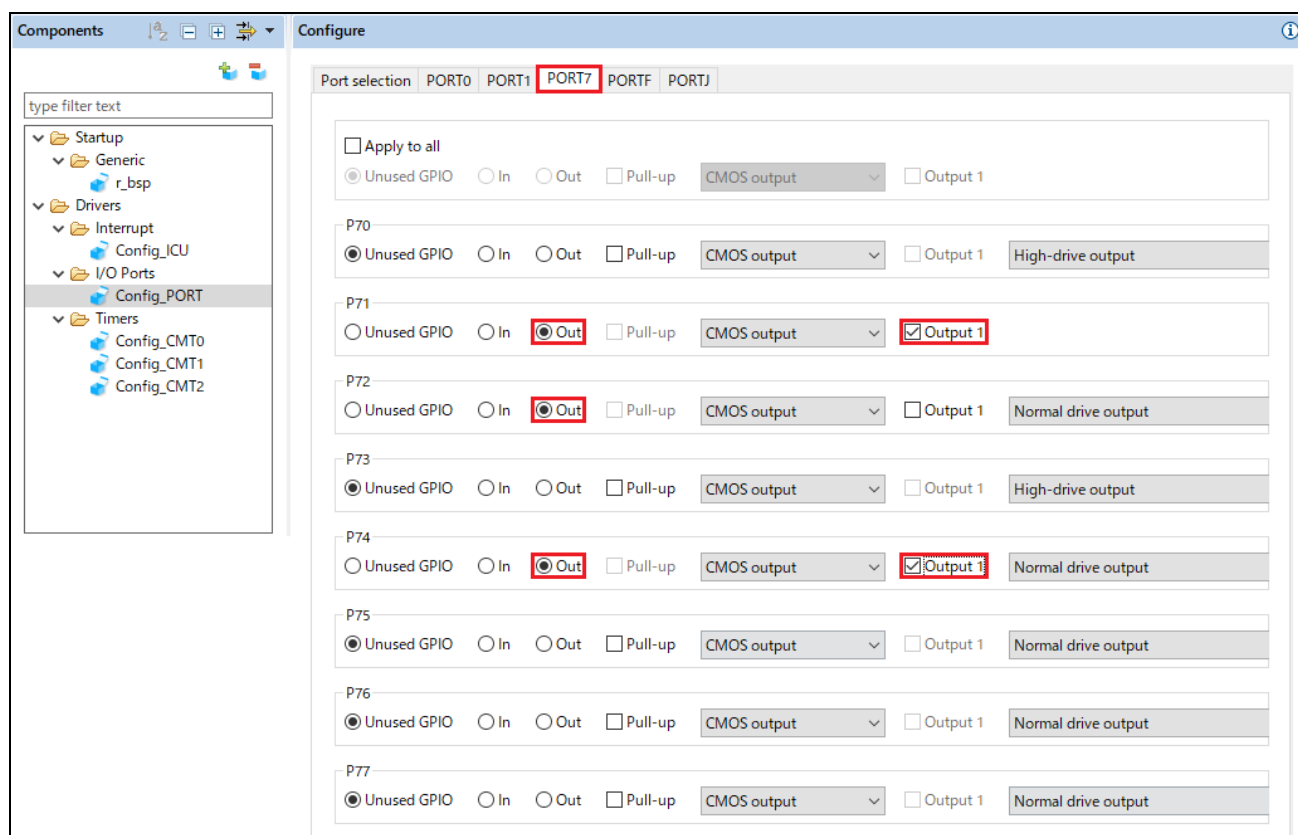


Figure 4-28 Select PORT7 tab

Select 'PORTF' tab.

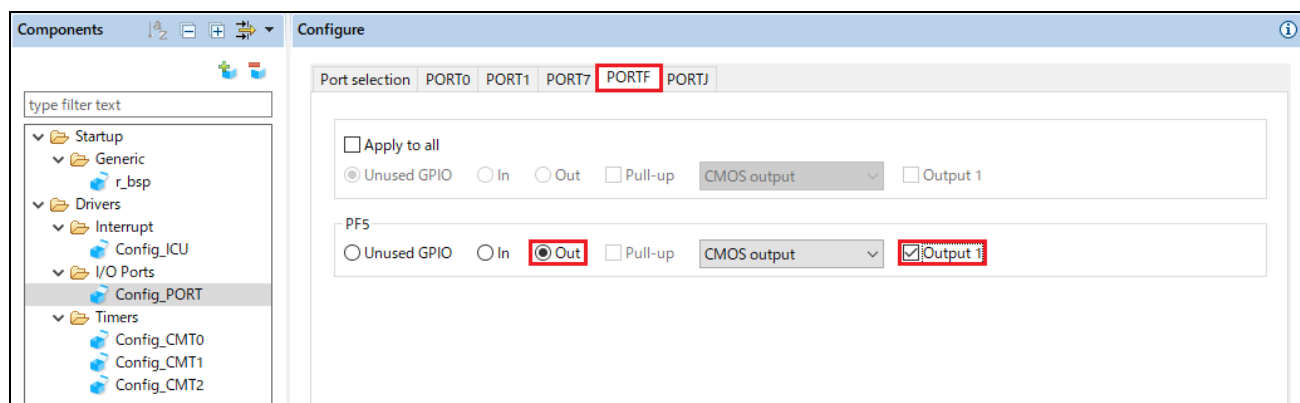


Figure 4-29 Select PORTF tab

Select 'PORTJ' tab.

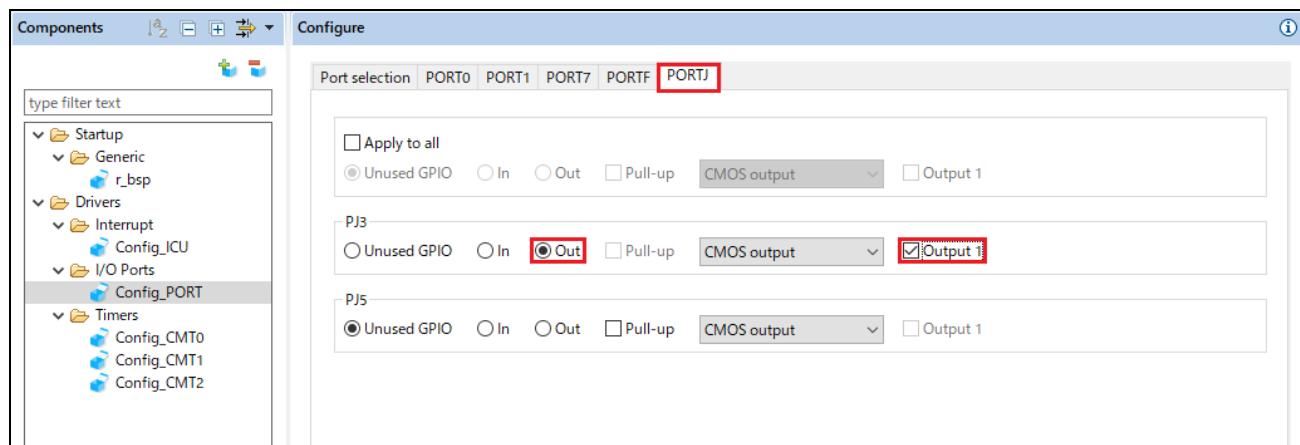


Figure 4-30 Select PORTJ tab

4.6.5 SCI/SCIF Asynchronous Mode

In the RSK+RX671, SCI10 is connected via a Renesas RL78/G1C to provide a USB virtual COM port as shown in the schematic.

Click the 'Add component'  icon. In 'Software Component Selection' dialog -> Type, select 'Drivers'. Select 'SCI/SCIF Asynchronous Mode' as shown in **Figure 4-31** then click 'Next'.

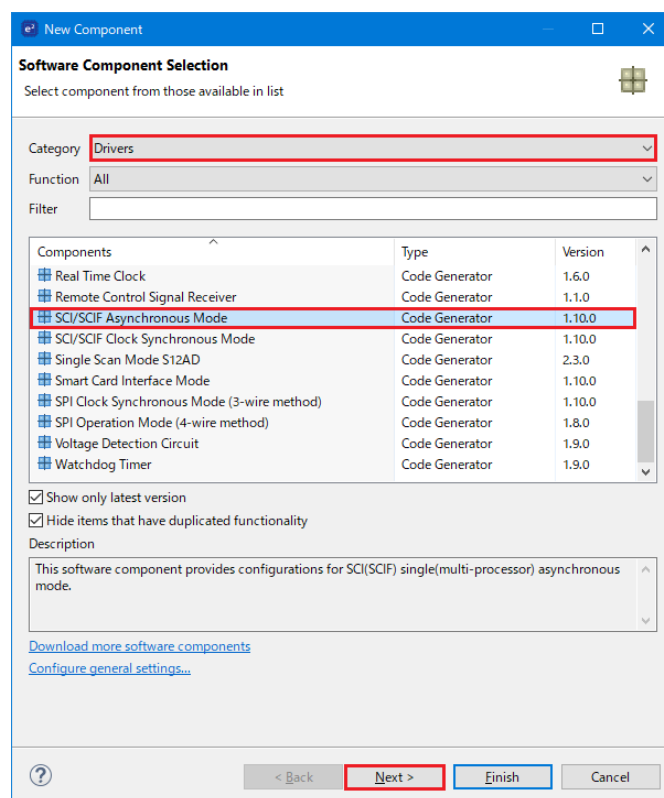


Figure 4-31 Select SCI/SCIF Asynchronous Mode

In 'Add new configuration for selected component' dialog -> Work mode, select 'Transmission/Reception' as shown in **Figure 4-32** below.

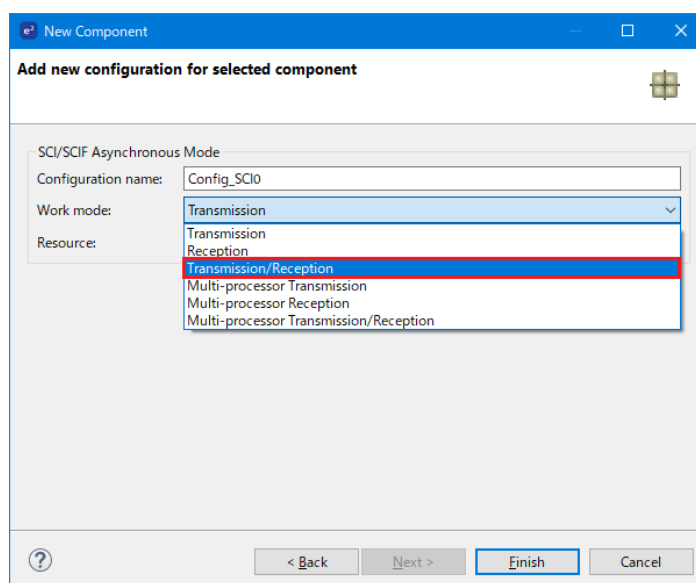


Figure 4-32 Select Work mode – Transmission/Reception

In 'Resource', select 'SCI10' as shown in **Figure 4-33** below.

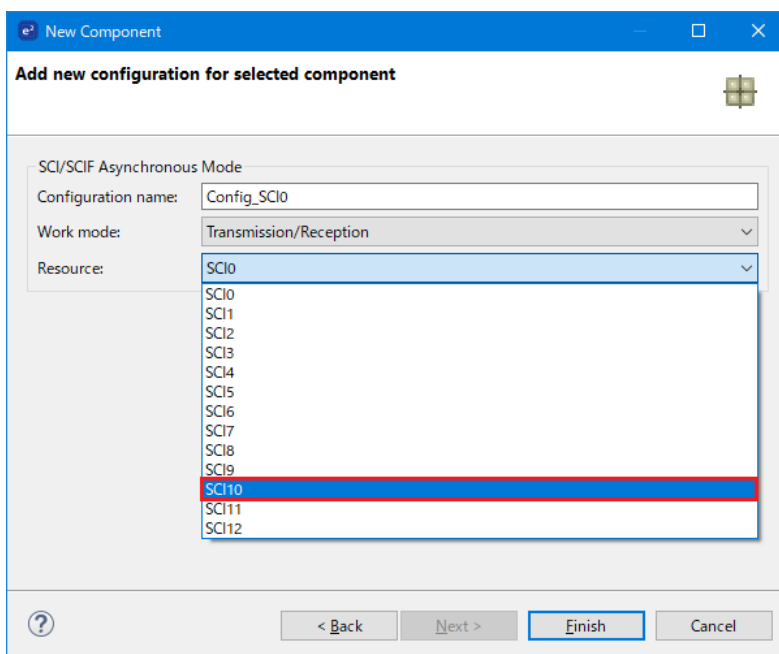


Figure 4-33 Select Resource – SCI10

Ensure that the 'Configuration name' updates to 'Config_SCI10' as shown in **Figure 4-34** below then click 'Finish'.

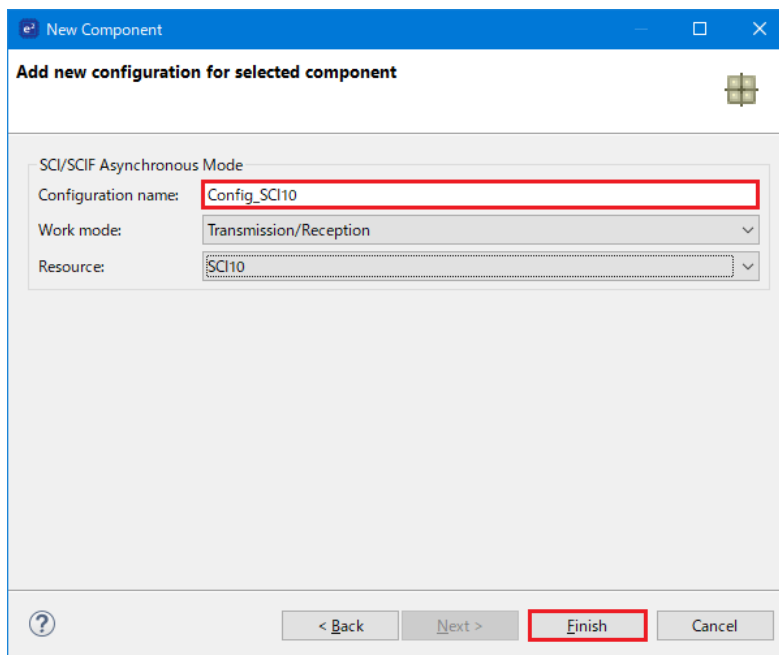


Figure 4-34 Ensure Configuration name - Config_SCI10

Configure SCI10 as shown in **Figure 4-35**. Ensure the 'Start bit edge detection' is set as 'Falling edge on RXD10 pin' and the 'Bit rate' is set to 19200 bps. All other settings remain at their defaults.

Configure	
FIFO mode setting	☒ Non-FIFO mode ☐ FIFO mode
Start bit edge detection setting	☐ Low level on RXD10 pin ☒ Falling edge on RXD10 pin
Data length setting	☐ 9 bits ☒ 8 bits ☐ 7 bits
Parity setting	☒ None ☐ Even ☐ Odd
Stop bit length setting	☒ 1 bit ☐ 2 bits
Transfer direction setting	☒ LSB-first ☐ MSB-first
Data inversion setting	☒ Normal ☐ Inverted
Instant transmission setting	☐ Enable instant transmission
Transmitter output setting	☒ Normal ☐ Inverted
Receiver input setting	☒ Normal ☐ Inverted
Transfer rate setting	Transfer clock: Internal clock Base clock: 16 cycles for 1-bit period Bit rate: 19200 (bps) (Actual value: 19230.769, Error: 0.16%) ☐ Enable modulation duty correction SCK10 pin function: SCK10 is not used
Transfer timing adjustment setting	☐ Adjust transmit signal transition: Does not change the waveform ☐ Adjust receive data sampling: 3 clocks later than default point
Noise filter setting	☐ Enable noise filter Noise filter clock: Clock signal divided by 1 120000000
Hardware flow control setting	☒ None ☐ CTS10# ☐ RTS10# RTS10 output active trigger number: 15
FIFO data setting	Transmit FIFO data trigger number: 0 Receive FIFO data trigger number: 8
Data match detection setting	☐ Enable data match detection Comparison data: 0x00
Data handling setting	Transmit data handling: Data handled in interrupt service routine Receive data handling: Data handled in interrupt service routine
Interrupt setting	TX10 priority: Level 15 (highest) RX10 priority: Level 15 (highest) ☒ Enable reception error interrupt (ERI10) TE10, ERI10 priority (Group AL0): Level 15 (highest) Receive data ready interrupt: Receive data full interrupt (RXI)
Callback function setting	☒ Transmission end ☒ Reception end ☒ Reception error

Figure 4-35 Config_SCI10 setting

4.6.6 SPI Clock Synchronous Mode

In the RSK+RX671, SCI6 is used as an SPI master for the Pmod LCD on the PMOD1 connector as shown in the schematic. Click the 'Add component'  icon. In 'Software Component Selection' dialog -> Type, select 'Drivers'. Select 'SPI Clock Synchronous Mode' as shown in **Figure 4-36** then click 'Next'.

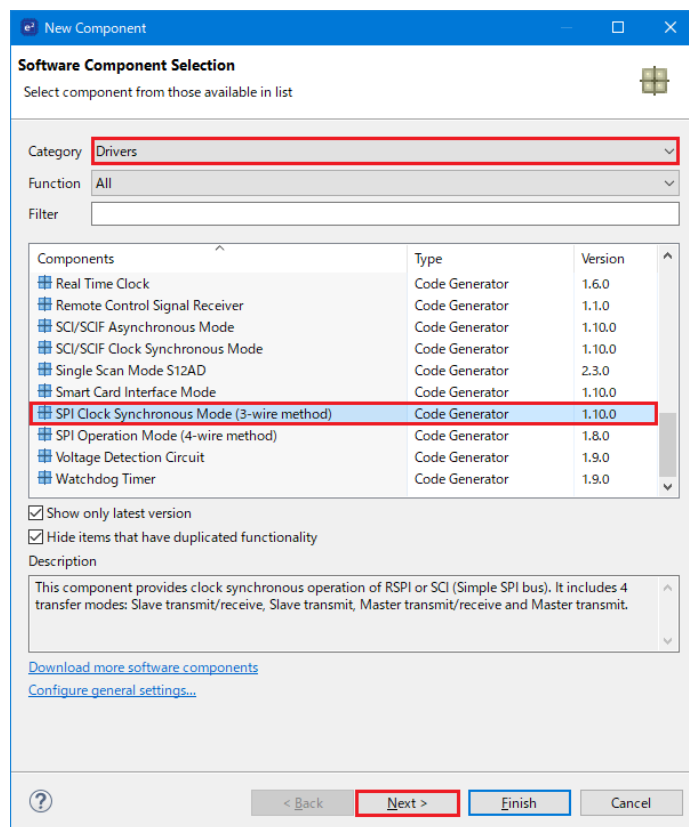


Figure 4-36 Select SPI Clock Synchronous Mode

In 'Add new configuration for selected component' dialog -> Operation, select 'Master transmit only' as shown in **Figure 4-37** below.

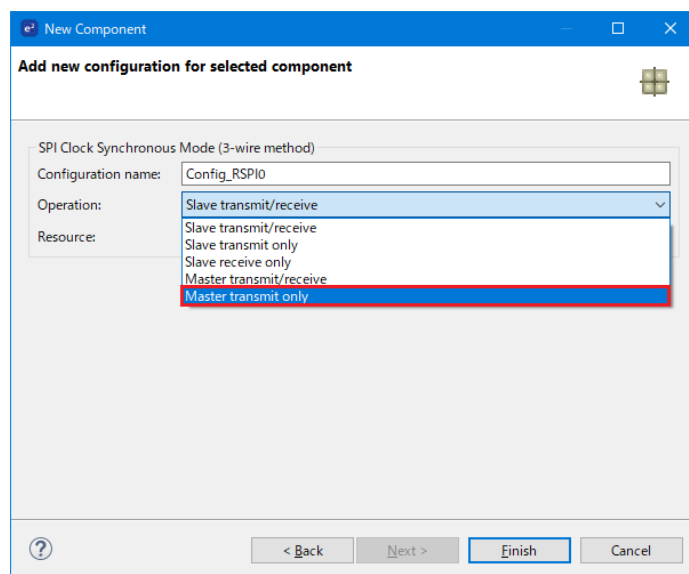


Figure 4-37 Select Operation – Master transmit only

In 'Resource', select 'SCI6' as shown in **Figure 4-38** below.

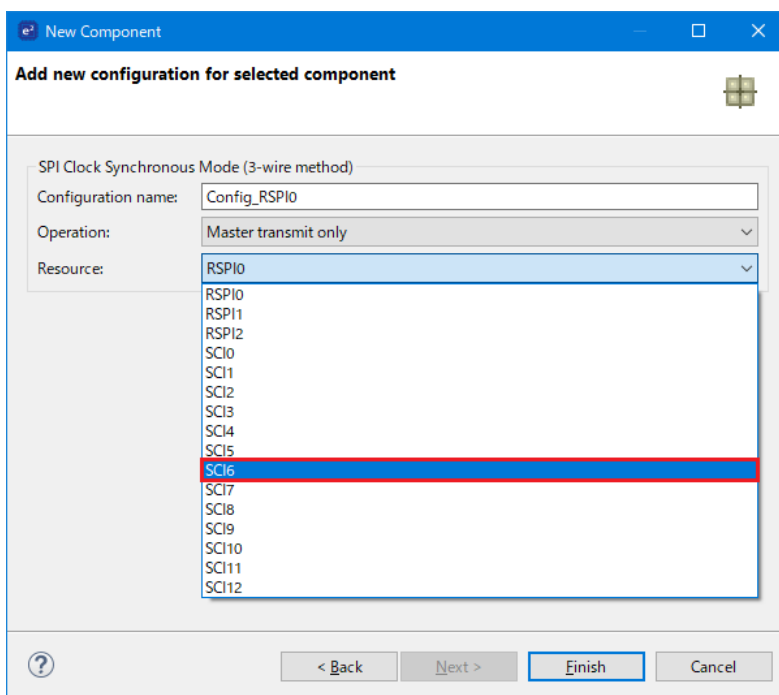


Figure 4-38 Select Resource – SCI6

Ensure that the 'Configuration name' updates to 'Config_SCI6' as shown in **Figure 4-39** below then click 'Finish'.

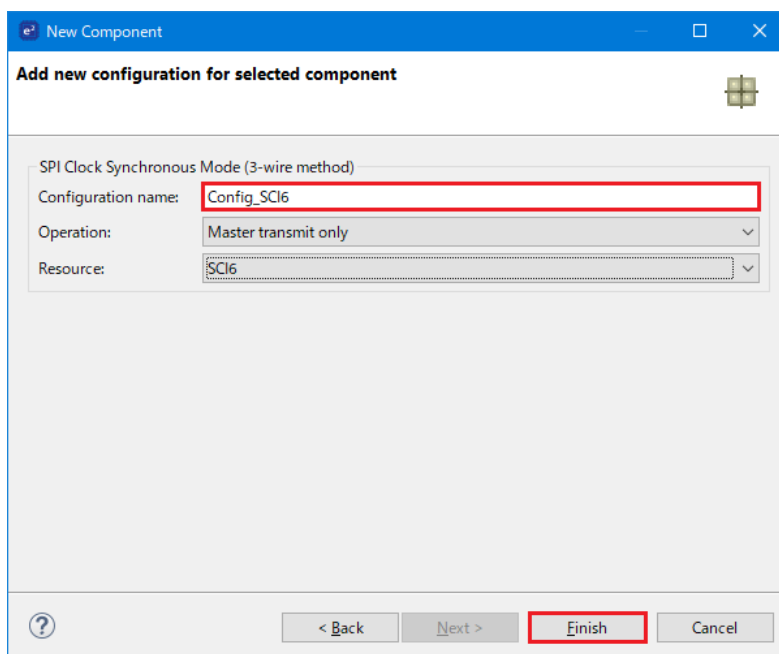


Figure 4-39 Ensure Configuration name - Config_SCI6

Configure SCI6 as shown in **Figure 4-40**. Ensure the 'Transfer direction' is set as 'MSB-first' and the 'Bit rate' is set to 15000 kbps. All other settings remain at their defaults.

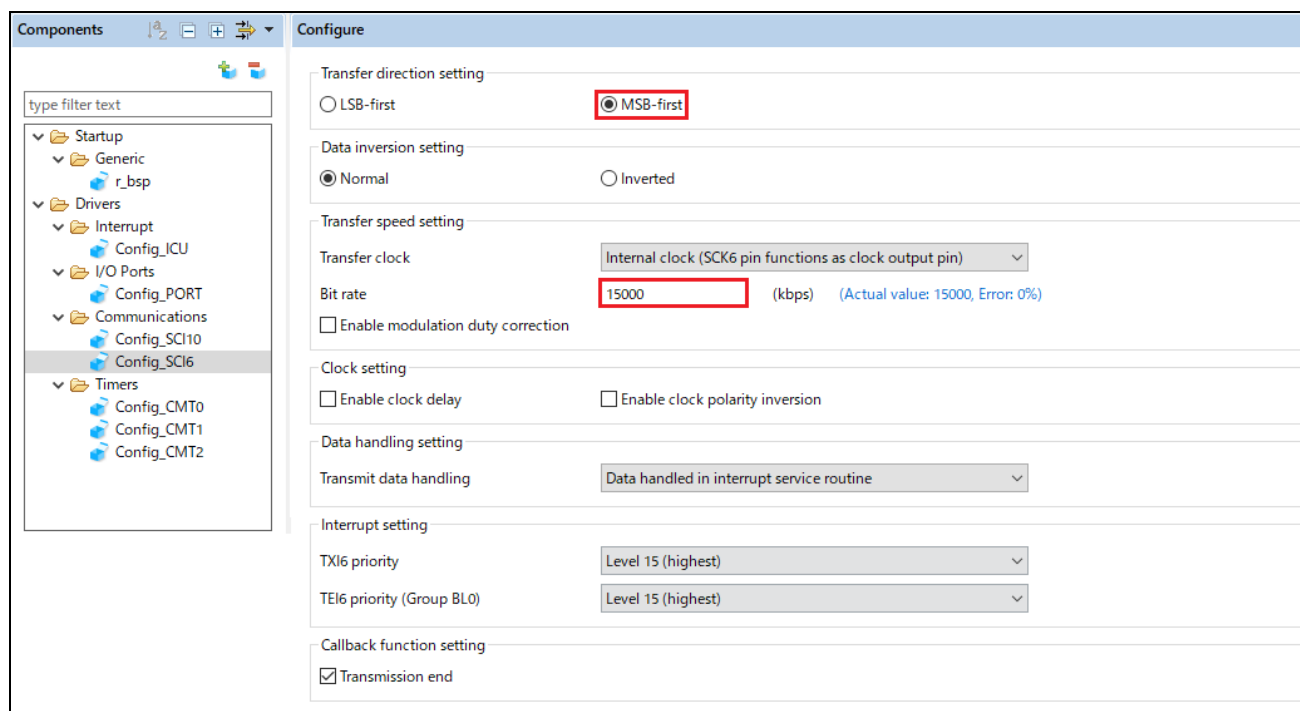


Figure 4-40 Config_SCI6 setting

4.6.7 Single Scan Mode S12AD

We will be using the S12AD in Single Scan Mode on the AN000 input, which is connected to the RV1 potentiometer output on the RSK+. The conversion start trigger will be via the pin connected to SW3. Click the 'Add component'  icon. In 'Software Component Selection' dialog -> Type, select 'Drivers'. Select 'Single Scan Mode S12AD' as shown in **Figure 4-41** then click 'Next'.

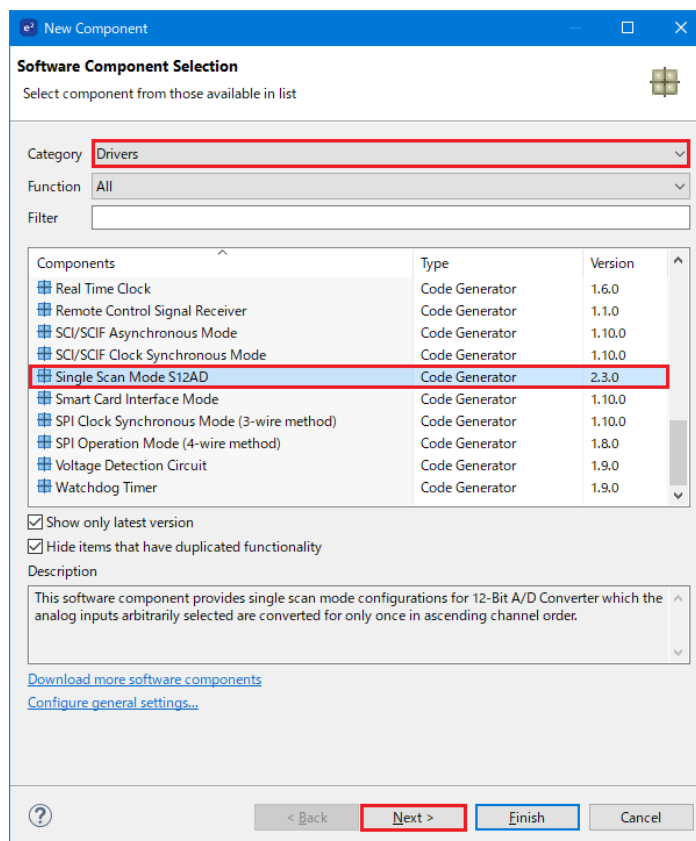


Figure 4-41 Select Single Scan Mode S12AD

Ensure that the 'Configuration name' is 'Config_S12AD0' as shown in **Figure 4-42** below then click 'Finish'.

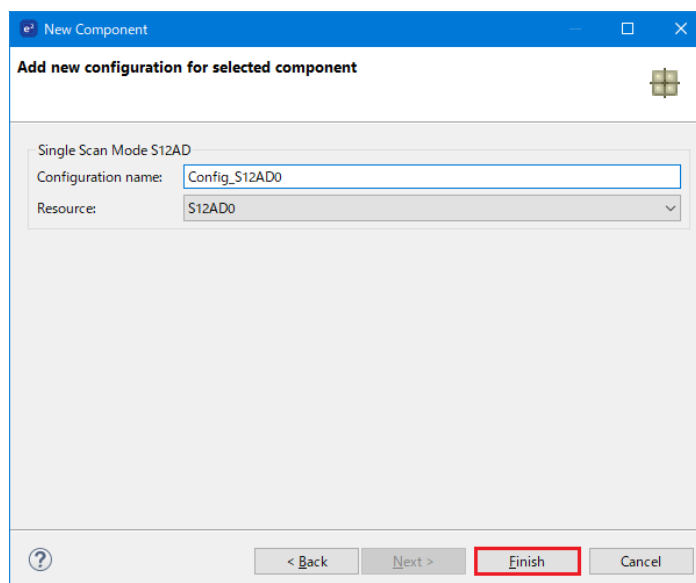


Figure 4-42 Ensure Configuration name - S12AD0

Configure S12AD0 as shown in **Figure 4-43** and **Figure 4-44**. Ensure the 'Analog input channel' tick box for AN000 is checked and the 'Start trigger source' is set to 'A/D conversion start trigger pin'. All other settings remain at their defaults.

The screenshot shows the Smart Configurator interface for configuring the S12AD0 module. The left pane displays a tree view of components, with 'Config_S12AD0' selected under the 'A/D Converter' category. The right pane shows the configuration settings for S12AD0, organized into two main sections: 'Basic setting' and 'Advance setting'.

Basic setting

- Note:** When using the 12-bit A/D converter unit 0, do not use the P40 to P47, P03, P05, and P07 pins as output pins. We also recommend not using the P00 to P02, P90, PD0 to PD7, PE0, and PE1 pins as output pins.
- Analog input mode setting:** ☐ Double trigger mode
- Analog input channel setting:**
 - ☒ AN000 ☐ AN001 ☐ AN002 ☐ AN003 ☐ AN004
 - ☐ AN005 ☐ AN006 ☐ AN007
- Conversion start trigger setting:**
 - Start trigger source:** A/D conversion start trigger pin (highlighted with a red box)
- Interrupt setting:**
 - ☒ Enable AD conversion end interrupt (S12AD0) **Priority:** Level 15 (highest)

Advance setting

- Add/Average AD value setting:**
 - ☐ AN000 ☐ AN001 ☐ AN002 ☐ AN003 ☐ AN004
 - ☐ AN005 ☐ AN006 ☐ AN007
- Self diagnosis setting:**
 - Mode:** Unused
 - Voltage used:** 0V
- Disconnection detection assist setting:**
 - Charge setting:** Unused
 - Period:** 2 ADCLK

Figure 4-43 Config_S12AD0 setting (1)

Data registers setting	
Data placement	Right-alignment
Automatic clearing	Disable automatic clearing
Conversion resolution	12-bit accuracy
Addition/Average mode select	Addition mode
Addition count	1-time
Window function setting	
☒ Disable ☐ Enable	
Window A/B operation setting	
☐ Enable comparison window A Window A/B complex condition	☐ Enable comparison window B Window A comparison condition matched OR window B comparison condition matched
A/D comparison A setting	
Reference data 0 for comparison	0
Reference data 1 for comparison	0
☐ Use comparator for AN000	Reference data 0 > A/D-converted value
☐ Use comparator for AN001	Reference data 0 > A/D-converted value
☐ Use comparator for AN002	Reference data 0 > A/D-converted value
☐ Use comparator for AN003	Reference data 0 > A/D-converted value
☐ Use comparator for AN004	Reference data 0 > A/D-converted value
☐ Use comparator for AN005	Reference data 0 > A/D-converted value
☐ Use comparator for AN006	Reference data 0 > A/D-converted value
☐ Use comparator for AN007	Reference data 0 > A/D-converted value
A/D comparison B setting	
Reference data 0 for comparison	0
Reference data 1 for comparison	0
Comparison B channel	Unused
	Reference data 0 > A/D-converted value
Input sampling time setting	
AN000/Self-diagnosis	0.183 (μs) (Actual value: 0.183)
AN001	0.183 (μs) (Actual value: 0.183)
AN002	0.183 (μs) (Actual value: 0.183)
AN003	0.183 (μs) (Actual value: 0.183)
AN004	0.183 (μs) (Actual value: 0.183)
AN005	0.183 (μs) (Actual value: 0.183)
AN006	0.183 (μs) (Actual value: 0.183)
AN007	0.183 (μs) (Actual value: 0.183)
(Total conversion time: 0.567μs)	
Interrupt setting	
☒ Enable AD conversion compare interrupt A (S12CMPAI)	☒ Enable AD conversion compare interrupt B (S12CMPBI)
Group BL1 priority	Level 15 (highest)

Figure 4-44 Config_S12AD0 setting (2)

4.7 The 'Pins' tabbed page

Smart Configurator assigns pins to the software components that are added to the project. Assignment of the pins can be changed using the Pins page.

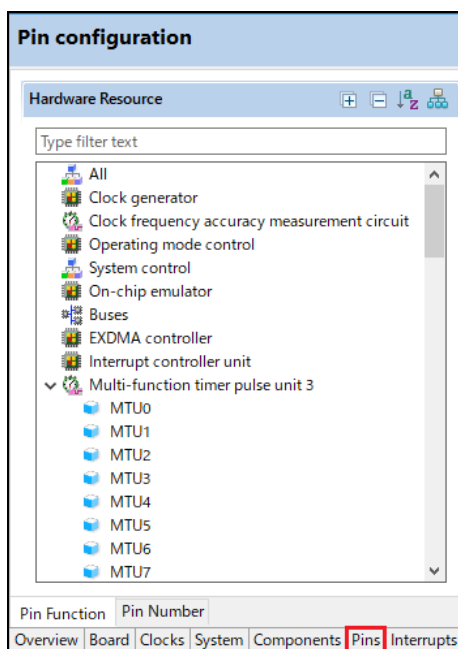


Figure 4-45 The 'Pins' tabbed page

4.7.1 Change pin assignment of a software component

To change the pin assignment of a software component in the Pin Function list, click  to change view to show by Software Components.

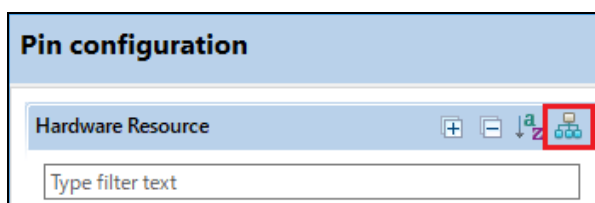


Figure 4-46 Change view to show by Hardware Resource

Select the Config_ICU of Software Components. In the Pin Function list -> Assignment column, change the pin assignment IRQ9 to P91, IRQ10 to P92. Ensure the 'Enable' tick box of IRQ9 and IRQ10 are checked, as shown in **Figure 4-47**.

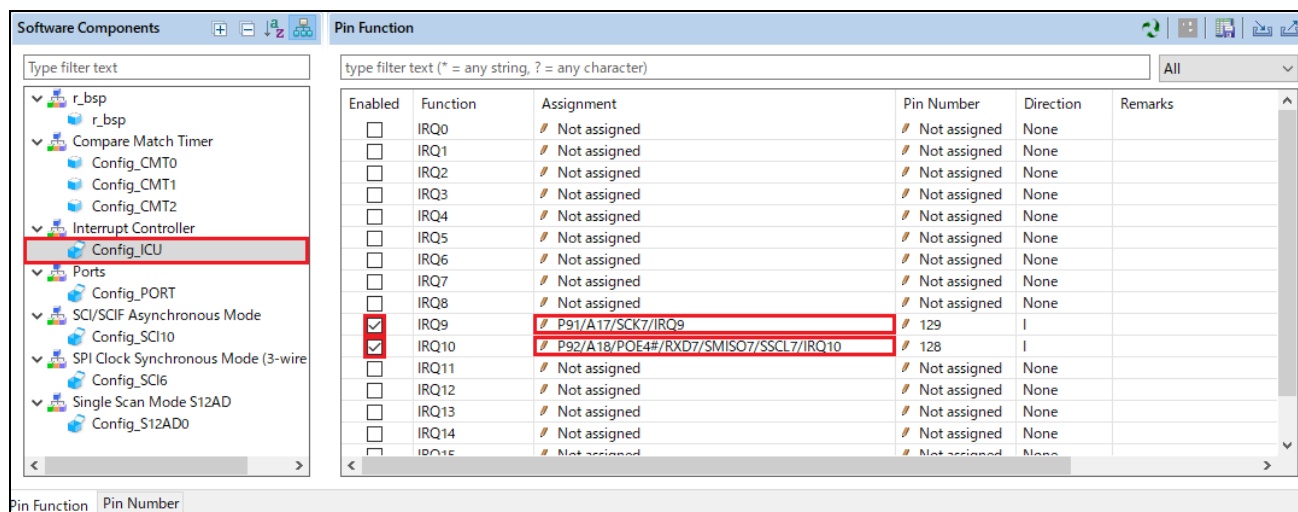


Figure 4-47 Configure pin assignment - Config_ICU

Select the Config_SCI10 of Software Components. In the Pin Function list -> Assignment column, Ensure the 'Enable' tick box of RXD10 and TXD10 are checked and Assignment column of RXD10 is P86/MTIOC4D/TIOCA0/SMISO10/SSCL10/RXD10/SMI and TXD10 is P87/MTIOC4C/TIOCA2/SMOSI10/SSDA10/TXD10/SMI as shown in **Figure 4-48**.

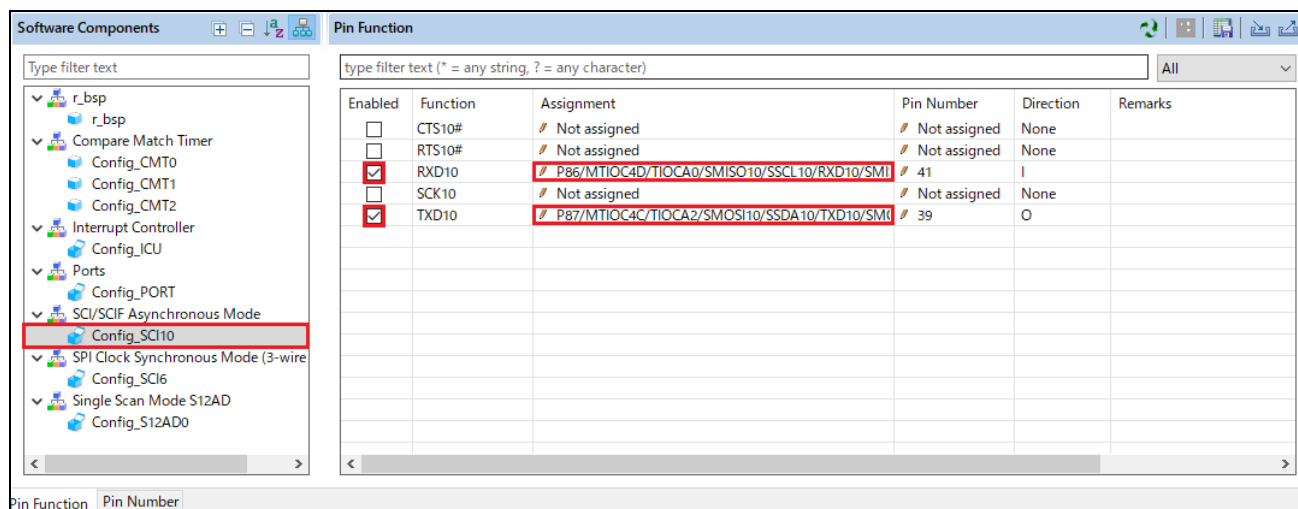


Figure 4-48 Configure pin assignment - Config_SCI10

Select the Config_SCI6 of Software Components. In the Pin Function list -> Assignment column, Ensure the 'Enable' tick box of SCK6 and SMOSI6 are checked and Assignment column of SCK6 is P02, SMOSI6 is P00 as shown in **Figure 4-49**.

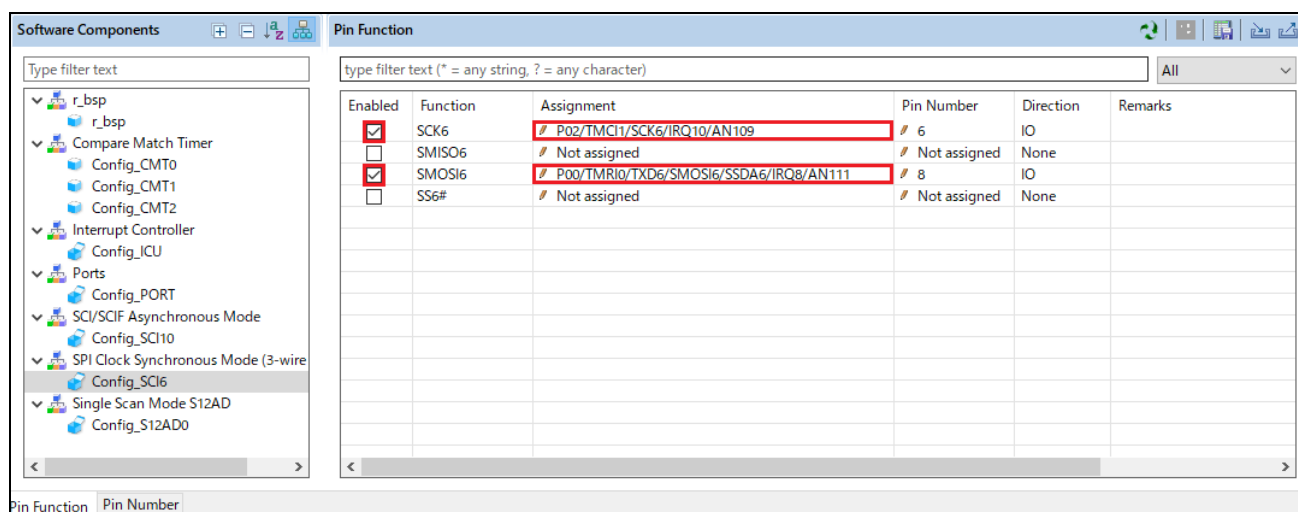


Figure 4-49 Configure pin assignment - Config_SCI6

Select the Config_S12AD0 of software components. In the Pin Function list -> Assignment column, Ensure the 'Enable' tick box of ADTRG0#, AN000, AVCC0, AVSS0, VREFH0 and VREFL0 are checked and Assignment column of AN000 is P40, ADTRG0# is P07 as shown in **Figure 4-50**.

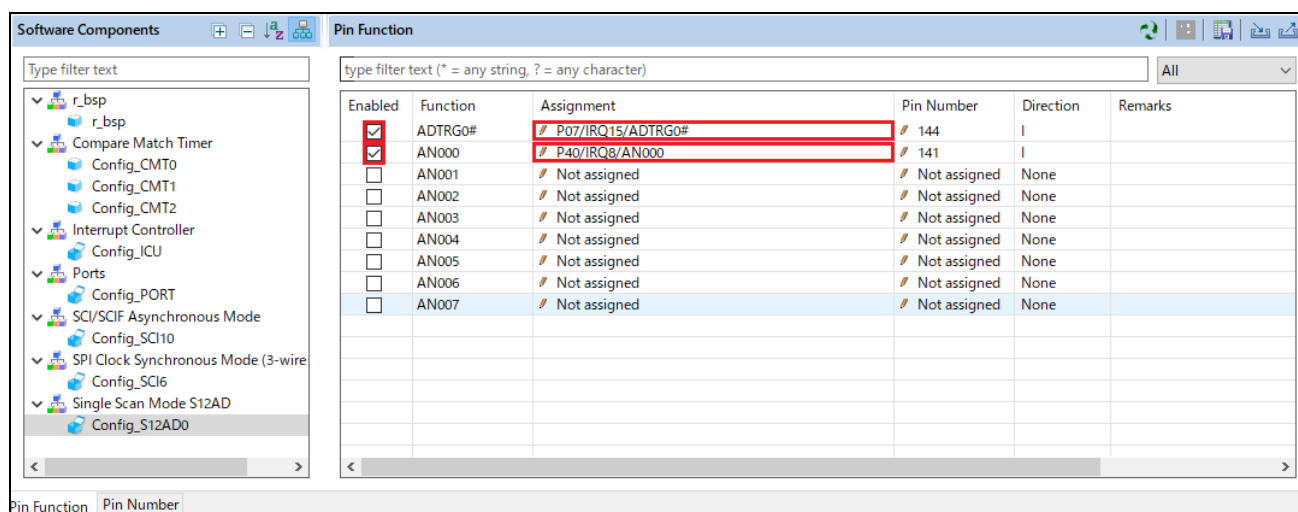


Figure 4-50 Configure pin assignment - Config_S12AD0

Peripheral function configuration is now complete. Save the project using the File -> Save, then click 'Generate Code' at location of **Figure 4-51**.



Figure 4-51 Generate Code Button

The Console pane should report 'Code generation is successful', as shown **Figure 4-52** below.

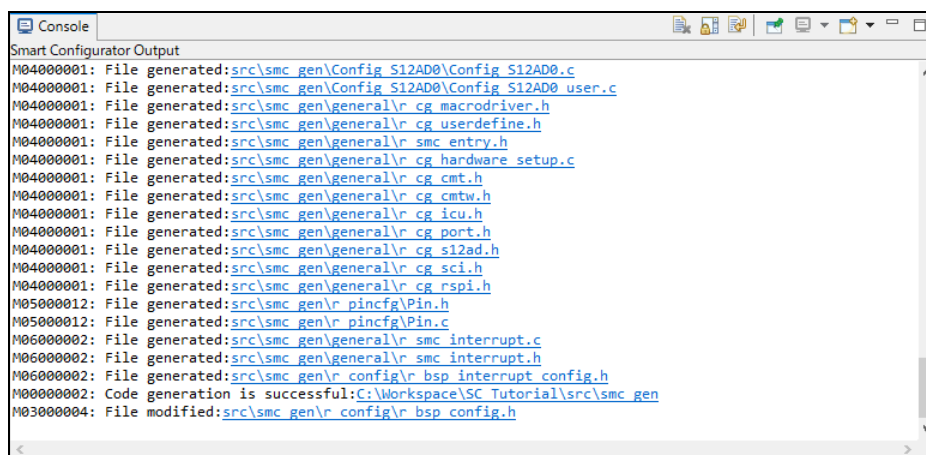


Figure 4-52 Smart Configurator console

4.8 Building the Project

The project template created by Smart Configurator can now be built. In the Project Explorer pane expand the 'src' folder then smc_gen folder.

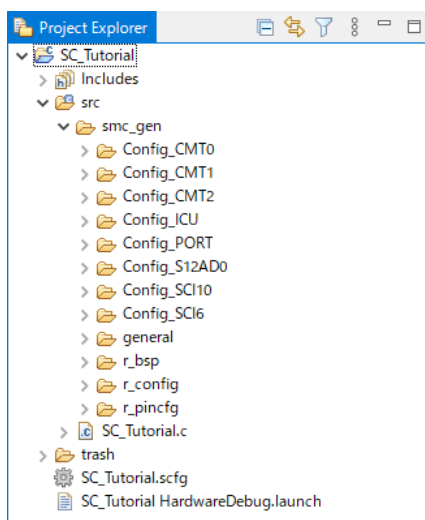


Figure 4-53 Generated folder structure

Switch back to the 'C/C++' perspective using the  button on the top right of the e² studio workspace.

Select SC_Tutorial in the Project Explorer pane, then use 'Build Project' from the 'Project' menu or the  button to build the tutorial. The project will build with no errors.

5. User Code Integration




In this section, the remaining application code is added to the project. Source files found in the RSK+ Web Installer are copied into the workspace and the user is directed to add code in the user areas of the code generator files.

Code must be inserted into the user code area within many Smart Configurator-generated files in this project, these user code areas are delimited by comments as follows:

```
/* Start user code for _xxxx_. Do not edit comment generated here */
/* End user code. Do not edit comment generated here */
```

Where `_xxxx_` depends on the particular area of code, i.e. 'function' for insertion of user functions and prototypes, 'global' for insertion of user global variable declarations, or 'include' for insertion of pre-processor include directives. User code inserted inside these comment delimiters is protected from being overwritten by Smart Configurator, if the user subsequently needs to use Smart Configurator to regenerate any of the Smart Configurator-generated code.

5.1 Project Settings

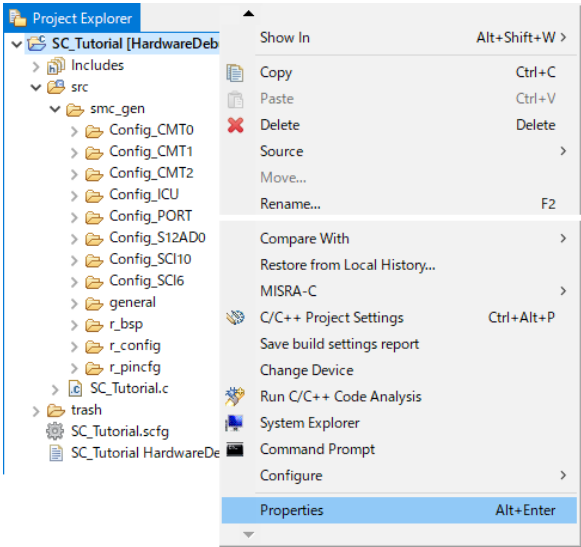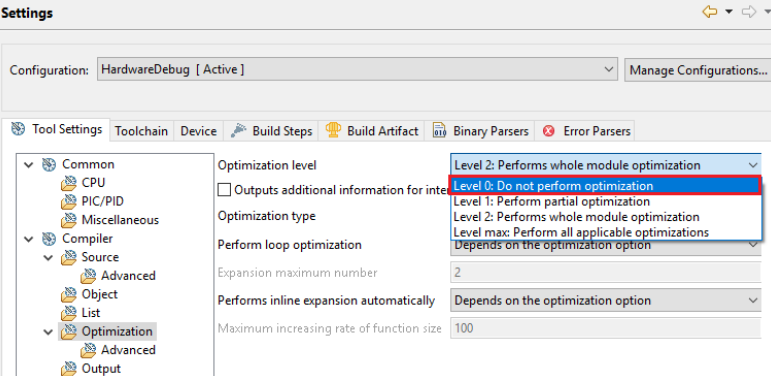Change the optimization level of the build configuration 'HardwareDebug' before building the project. With the SC_Tutorial project selected, right-click and select [Properties], or use the shortcut keys [Alt] + [Enter] to open the Properties window.	
- Navigate to 'C/C++ Build -> Settings -> Compiler -> Optimization'. - Select 'Level 0: Do not perform optimization' from the Optimization level pull-down.	
Press the 'Apply and Close' button to close Properties window.	

5.2 LCD Code Integration

API functions for the Okaya LCD display are provided with the RSK+. Refer to the Tutorial project folder created according to the Quick Start Guide procedure. Check that the following files are in the src folder:

- ascii.c
- ascii.h
- r_okaya_lcd.c
- r_okaya_lcd.h

Copy these files in to the src folder below the workspace. These files will be automatically added to the project as shown in **Figure 5-1**.

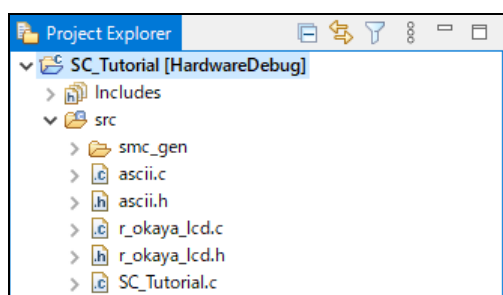


Figure 5-1 Adding files to the project

In the e² studio Project Tree, expand the 'src\smc_gen\general' folder and open the file 'r_cg_userdefine.h' by double-clicking on it. Insert the following #defines in between the user code delimiter comments as shown below.

```
/* Start user code for macro define. Do not edit comment generated here */

#define TRUE          (1)
#define FALSE         (0)

/* End user code. Do not edit comment generated here */
```

In the e² studio Project Tree, expand the 'src' folder and open the file 'SC_Tutorial.c' by double-clicking on it. Add header files near the declaration '#include r_smc_entry.h'.

```
#include "r_smc_entry.h"
#include "r_okaya_lcd.h"
#include "r_cg_userdefine.h"
```

Scroll down to the 'main' function and insert the highlighted code as shown below into the beginning of the 'main' function:

```
void main(void)
{
    /* Initialize the debug LCD */
    R_LCD_Init();

    /* Displays the application name on the debug LCD */
    R_LCD_Display(0, (uint8_t *) " RSK+RX671 ");
    R_LCD_Display(1, (uint8_t *) " Tutorial ");
    R_LCD_Display(2, (uint8_t *) " Press Any Switch ");
    while (1U)
    {
        ;
    }
}
```

Indentation is lost when the code described in this manual is pasted into the e² studio source file. Also check that the pasted code is correct.

5.2.1 SPI Code

The Okaya LCD display is driven by the SPI Master that was configured using Smart Configurator in §4.5.6. In the e² studio Project Tree, expand the 'src\smc_gen\Config_SCI6' folder and open the file 'Config_SCI6.h' by double-clicking on it. Insert the following code in the user code area at the end of the file:

```
/* Start user code for function. Do not edit comment generated here */
/* Exported functions used to transmit a number of bytes and wait for completion */
MD_STATUS R_SCI6_SPIMasterTransmit(uint8_t * const tx_buf, const uint16_t tx_num);
/* End user code. Do not edit comment generated here */
```

Now, open the Config_SCI6_user.c file and insert the following code in the user area for global:

```
/* Start user code for global. Do not edit comment generated here */
/* Flag used locally to detect transmission complete */
static volatile uint8_t s_sci6_txdone;
/* End user code. Do not edit comment generated here */
```

Insert the following code in the transmit end call-back function for SCI6:

```
static void r_Config_SCI6_callback_transmitend(void)
{
    /* Start user code for r_Config_SCI6_callback_transmitend. Do not edit comment generated here */
    s_sci6_txdone = TRUE;
    /* End user code. Do not edit comment generated here */
}
```

Now insert the following function in the user code area at the end of the file:

```
/* Start user code for adding. Do not edit comment generated here */
/*****
 * Function Name: R_SCI6_SPIMasterTransmit
 * Description : This function sends SPI6 data to slave device.
 * Arguments : tx_buf -
 *             transfer buffer pointer
 *             tx_num -
 *             buffer size
 * Return Value : status -
 *               MD_OK or MD_ARGERROR
 *****/
MD_STATUS R_SCI6_SPIMasterTransmit (uint8_t * const tx_buf,
                                     const uint16_t tx_num)
{
    MD_STATUS status = MD_OK;

    /* Clear the flag before initiating a new transmission */
    s_sci6_txdone = FALSE;

    /* Send the data using the API */
    status = R_Config_SCI6_SPI_Master_Send(tx_buf, tx_num);

    /* Wait for the transmit end flag */
    while (FALSE == s_sci6_txdone)
    {
        /* Wait */
    }

    return (status);
}
/*****
 * End of function R_SCI6_SPIMasterTransmit
 *****/
```

This function uses the transmit end callback function to perform flow control on the SPI transmission to the LCD and is used as the main API call in the LCD code module.

5.2.2 CMT Code

The LCD code needs to insert delays to meet the timing requirements of the display module. This is achieved using the dedicated timer which was configured using Smart Configurator in §4.5.2. Open the file 'src\smc_gen\Config_CMT0\Config_CMT0.h' and insert the following code in the user area for function at the end of the file:

```
/* Start user code for function. Do not edit comment generated here */
void R_CMT_MsDelay(const uint16_t millisec);
/* End user code. Do not edit comment generated here */
```

Open the file 'Config_CMT0_user.c' and insert the following code in the user area for global at the beginning of the file:

```
/* Start user code for global. Do not edit comment generated here */
static volatile uint8_t s_one_ms_delay_complete = FALSE;
/* End user code. Do not edit comment generated here */
```

Scroll down to the r_Config_CMT0_cmi0_interrupt function and insert the following line in the user code area:

```
static void r_Config_CMT0_cmi0_interrupt(void)
{
    /* Start user code for r_Config_CMT0_cmi0_interrupt. Do not edit comment generated here */
    s_one_ms_delay_complete = TRUE;
    /* End user code. Do not edit comment generated here */
}
```

Then insert the following function in the user code area at the end of the file:

```
/* Start user code for adding. Do not edit comment generated here */

/*****
 * Function Name: R_CMT_MsDelay
 * Description   : Uses CMT0 to wait for a specified number of milliseconds
 * Arguments    : uint16_t millisec, number of milliseconds to wait
 * Return Value : None
 *****/
void R_CMT_MsDelay (const uint16_t millisec)
{
    uint16_t ms_count = 0;

    do
    {
        R_Config_CMT0_Start();
        while (FALSE == s_one_ms_delay_complete)
        {
            /* Wait */
        }
        R_Config_CMT0_Stop();
        s_one_ms_delay_complete = FALSE;
        ms_count++;
    } while (ms_count < millisec);
}

/*****
End of function R_CMT_MsDelay
*****/
```

5.3 Additional include paths

Before the project can be built the compiler needs some additional include paths added. Select the SC_Tutorial project in the Project Explorer pane. Right click in the Project Explorer window and select 'Properties'. Navigate to 'C/C++ Build -> Settings -> Compiler -> Source' and click the  button as shown in **Figure 5-2**.

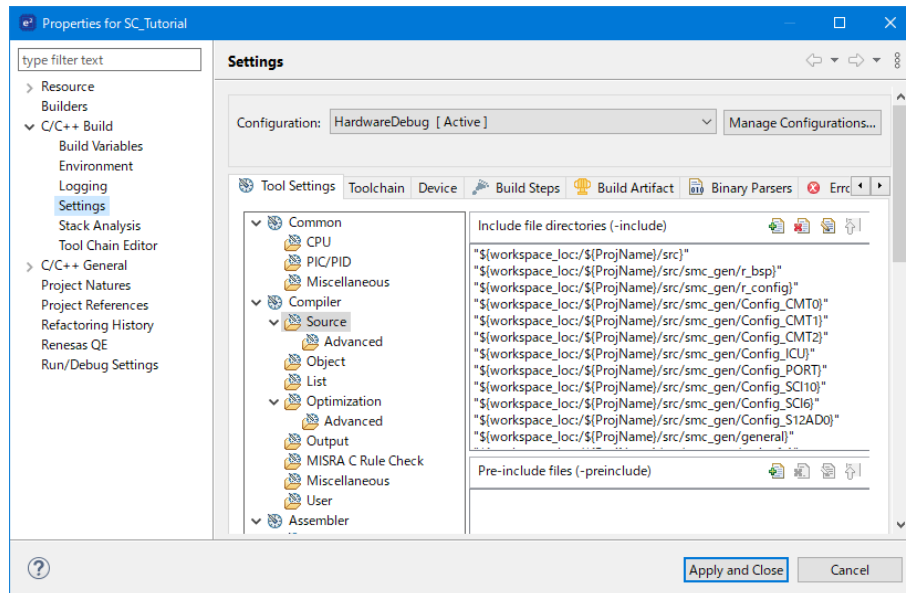


Figure 5-2 Adding additional search paths

In the 'Add directory path' dialog, click the 'Workspace...' button and in the 'Folder selection' dialog browse to the 'SC_Tutorial/src' folder and click 'OK'. e2 studio formats the path as shown in **Figure 5-3** below.

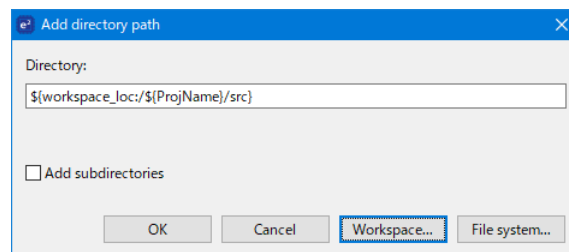


Figure 5-3 Adding workspace search path

Close the property by clicking the 'Apply and Close' button shown in **Figure 5-2**, and when the 'Settings' dialog shown in **Figure 5-4** is appeared, click 'Yes' to finish the setting.

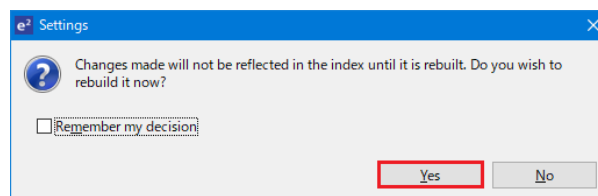


Figure 5-4 Settings dialog

Select 'Build Project' from the 'Project' menu or use the  button. e2 studio will build the project with no errors.

The project may now be run using the debugger as described in §6. The program will display 'RSK+RX671 Tutorial Press Any Switch' on three lines in the LCD display.

5.4 Switch Code Integration

API functions for user switch control are provided with the RSK+. Refer to the Tutorial project folder created according to the Quick Start Guide procedure. Check that the following files are in the src folder:

- rskrx671def.h
- r_rsk_switch.c
- r_rsk_switch.h

Copy these files in to the src folder below the workspace.

The switch code uses interrupt code in the files Config_ICU.h, Config_ICU.c and Config_ICU_user.c and timer code in the files Config_CMT1.h, Config_CMT1.c, Config_CMT1_user.c, Config_CMT2.h, Config_CMT2.c and Config_CMT2_user.c as described in §4.5.2. and §4.5.3. It is necessary to provide additional user code in these files to implement the switch press/release detection and de-bouncing required by the API functions in r_rsk_switch.c.

5.4.1 Interrupt Code

In the e² studio Project Tree, expand the 'src\smc_gen\Config_ICU' folder and open the file 'Config_ICU.h' by double-clicking on it. Insert the following code in the user code area at the end of the file:

```
/* Start user code for function. Do not edit comment generated here */  
  
/* Function prototypes for detecting and setting the edge trigger of ICU_IRQ */  
uint8_t R_ICU_IRQIsFallingEdge(const uint8_t irq_no);  
void R_ICU_IRQSetFallingEdge(const uint8_t irq_no, const uint8_t set_f_edge);  
void R_ICU_IRQSetRisingEdge(const uint8_t irq_no, const uint8_t set_r_edge);  
  
/* End user code. Do not edit comment generated here */
```

Now, open the Config_ICU.c file and insert the following code in the user code area at the end of the file:

```

/* Start user code for adding. Do not edit comment generated here */

/*****
* Function Name: R_ICU_IRQIsFallingEdge
* Description : This function returns 1 if the specified ICU_IRQ is set to
*               falling edge triggered, otherwise 0.
* Arguments   : uint8_t irq_no
* Return Value : 1 if falling edge triggered, 0 if not
*****/
uint8_t R_ICU_IRQIsFallingEdge (const uint8_t irq_no)
{
    uint8_t falling_edge_trig = 0x0;

    if (ICU.IRQCR[irq_no].BYTE & _04_ICU_IRQ_EDGE_FALLING)
    {
        falling_edge_trig = 1;
    }

    return (falling_edge_trig);
}

/*****
* End of function R_ICU_IRQIsFallingEdge
*****/

/*****
* Function Name: R_ICU_IRQSetFallingEdge
* Description : This function sets/clears the falling edge trigger for the
*               specified ICU_IRQ.
* Arguments   : uint8_t irq_no
*               uint8_t set_f_edge, 1 if setting falling edge triggered, 0 if
*               clearing
* Return Value : None
*****/
void R_ICU_IRQSetFallingEdge (const uint8_t irq_no, const uint8_t set_f_edge)
{
    if (1 == set_f_edge)
    {
        ICU.IRQCR[irq_no].BYTE |= _04_ICU_IRQ_EDGE_FALLING;
    }
    else
    {
        ICU.IRQCR[irq_no].BYTE &= (uint8_t) ~_04_ICU_IRQ_EDGE_FALLING;
    }
}

/*****
* End of function R_ICU_IRQSetFallingEdge
*****/

/*****
* Function Name: R_ICU_IRQSetRisingEdge
* Description : This function sets/clear the rising edge trigger for the
*               specified ICU_IRQ.
* Arguments   : uint8_t irq_no
*               uint8_t set_r_edge, 1 if setting rising edge triggered, 0 if
*               clearing
* Return Value : None
*****/
void R_ICU_IRQSetRisingEdge (const uint8_t irq_no, const uint8_t set_r_edge)
{
    if (1 == set_r_edge)
    {
        ICU.IRQCR[irq_no].BYTE |= _08_ICU_IRQ_EDGE_RISING;
    }
    else
    {
        ICU.IRQCR[irq_no].BYTE &= (uint8_t) ~_08_ICU_IRQ_EDGE_RISING;
    }
}

/*****
* End of function R_ICU_IRQSetRisingEdge
*****/

/* End user code. Do not edit comment generated here */

```

Open the Config_ICU_user.c file and insert the following code in the user code area for include near the top of the file:

```
/* Start user code for include. Do not edit comment generated here */

/* Defines switch callback functions required by interrupt handlers */
#include "r_rsk_switch.h"

/* End user code. Do not edit comment generated here */
```

In the same file insert the following code in the user code area inside the function r_Config_ICU_irq9_interrupt:

```
/* Start user code for r_Config_ICU_irq9_interrupt. Do not edit comment generated here */

/* Switch 1 callback handler */
R_SWITCH_IsrCallback1();

/* End user code. Do not edit comment generated here */
```

In the same file insert the following code in the user code area inside the function r_Config_ICU_irq10_interrupt:

```
/* Start user code for r_Config_ICU_irq10_interrupt. Do not edit comment generated here */

/* Switch 2 callback handler */
R_SWITCH_IsrCallback2();

/* End user code. Do not edit comment generated here */
```

5.4.2 De-bounce Timer Code

In the e² studio Project Tree, expand the 'src\smc_gen\Config_CMT1' folder and open the 'Config_CMT1_user.c' file and insert the following code in the user code area for include near the top of the file:

```
/* Start user code for include. Do not edit comment generated here */

/* Defines switch callback functions required by interrupt handlers */
#include "r_rsk_switch.h"

/* End user code. Do not edit comment generated here */
```

In the Config_CMT1_user.c' file, insert the following code in the user code area inside the function r_Config_CMT1_cmi1_interrupt:

```
/* Start user code for r_Config_CMT1_cmi1_interrupt. Do not edit comment generated here */

/* Stop this timer - we start it again in the de-bounce routines */
R_Config_CMT1_Stop();

/* Call the de-bounce call back routine */
R_SWITCH_DebounceIsrCallback();

/* End user code. Do not edit comment generated here */
```

In the e² studio Project Tree, expand the 'src\smc_gen\Config_CMT2' folder and open the file 'Config_CMT2_user.c' file and insert the following code in the user code area for include near the top of the file:

```
/* Start user code for include. Do not edit comment generated here */

/* Defines switch callback functions required by interrupt handlers */
#include "r_rsk_switch.h"

/* End user code. Do not edit comment generated here */
```

In the same file insert the following code in the user code area inside the function `r_Config_CMT2_cmi2_interrupt`:

```
/* Start user code for r_Config_CMT2_cmi2_interrupt. Do not edit comment generated here */

/* Stop this timer - we start it again in the de-bounce routines */
R_Config_CMT2_Stop();

/* Call the de-bounce call back routine */
R_SWITCH_DebounceIsrCallback();

/* End user code. Do not edit comment generated here */
```

5.4.3 Main Switch and ADC Code

In this part of the tutorial we add the code to act on the switch presses to activate A/D conversions and display the result on the LCD. In §4.5.7 we configured the ADC to be triggered from the ADTRG0# pin, SW3. In this code, we also perform software triggered A/D conversion from the user switches SW1 and SW2, by reconfiguring the ADC trigger source on-the-fly once an SW1 or SW2 press is detected.

In the e2 studio Project Tree, expand the 'src\smc_gen\general' folder and open the file 'r_cg_userdefine.h'. Insert the following code the user code area, resulting in the code shown below:

```
/* Start user code for function. Do not edit comment generated here */
extern volatile uint8_t g_adc_trigger;

/* End user code. Do not edit comment generated here */
```

In the e2 studio Project Tree, expand the 'src' folder and Open the file 'SC_Tutorial.c' and add the highlighted code, resulting in the code shown below:

```
#include "r_smc_entry.h"
#include "r_okaya_lcd.h"
#include "r_cg_userdefine.h"
#include "Config_SI2AD0.h"
#include "r_rsk_switch.h"

/* Variable for flagging user requested ADC conversion */
volatile uint8_t g_adc_trigger = FALSE;

/* Prototype declaration for cb_switch_press */
static void cb_switch_press (void);

/* Prototype declaration for get_adc */
static uint16_t get_adc(void);

/* Prototype declaration for lcd display adc */
static void lcd_display_adc (const uint16_t adc_result);
```

Next add the highlighted code below in the main function and the code inside the while loop, resulting in the code shown below:

```
void main(void)
{
    /* Initialize the switch module */
    R_SWITCH_Init();

    /* Set the call back function when SW1 or SW2 is pressed */
    R_SWITCH_SetPressCallback(cb_switch_press);

    /* Initialize the debug LCD */
    R_LCD_Init ();

    /* Displays the application name on the debug LCD */
    R_LCD_Display(0, (uint8_t *) " RSK+RX671 ");
    R_LCD_Display(1, (uint8_t *) " Tutorial ");
    R_LCD_Display(2, (uint8_t *) " Press Any Switch ");

    /* Start the A/D converter */
    R_Config_S12AD0_Start();

    while (1U)
    {
        uint16_t adc_result;

        /* Wait for user requested A/D conversion flag to be set (SW1 or SW2) */
        if (TRUE == g_adc_trigger)
        {
            /* Call the function to perform an A/D conversion */
            adc_result = get_adc();

            /* Display the result on the LCD */
            lcd_display_adc(adc_result);

            /* Reset the flag */
            g_adc_trigger = FALSE;
        }
        /* SW3 is directly wired into the ADTRG0n pin so will
        cause the interrupt to fire */
        else if (TRUE == g_adc_complete)
        {
            /* Get the result of the A/D conversion */
            R_Config_S12AD0_Get_ValueResult(ADCHANNEL0, &adc_result);

            /* Display the result on the LCD */
            lcd_display_adc(adc_result);

            /* Reset the flag */
            g_adc_complete = FALSE;
        }
        else
        {
            /* do nothing */
        }
    }
}
```

Then add the definition for the switch call-back, get_adc and lcd_display_adc functions below the main function, as shown below:

```

/*****
* Function Name : cb_switch_press
* Description   : Switch press callback function. Sets g_adc_trigger flag.
* Argument      : none
* Return value  : none
*****/
static void cb_switch_press (void)
{
    /* Check if switch 1 or 2 was pressed */
    if (g_switch_flag & (SWITCHPRESS_1 | SWITCHPRESS_2))
    {
        /* set the flag indicating a user requested A/D conversion is required */
        g_adc_trigger = TRUE;

        /* Clear flag */
        g_switch_flag = 0x0;
    }
}
/*****
* End of function cb_switch_press
*****/

/*****
* Function Name : get_adc
* Description    : Reads the ADC result, converts it to a string and displays
*                  it on the LCD panel.
* Argument       : none
* Return value   : uint16_t adc value
*****/
static uint16_t get_adc (void)
{
    /* A variable to retrieve the adc result */
    uint16_t adc_result;

    /* Stop the A/D converter being triggered from the pin ADTRG0n */
    R_Config_S12AD0_Stop();

    /* Start a conversion */
    R_S12AD0_SWTriggerStart();

    /* Wait for the A/D conversion to complete */
    while (FALSE == g_adc_complete)
    {
        /* Wait */
        nop();
    }

    /* Stop conversion */
    R_S12AD0_SWTriggerStop();

    /* Clear ADC flag */
    g_adc_complete = FALSE;

    R_Config_S12AD0_Get_ValueResult (ADCHANNEL0, &adc_result);

    /* Set AD conversion start trigger source back to ADTRG0n pin */
    R_Config_S12AD0_Start();

    return (adc_result);
}
/*****
* End of function get_adc
*****/

```

```

/*****
* Function Name : lcd_display_adc
* Description   : Converts adc result to a string and displays
*                it on the LCD panel.
* Argument      : uint16_t adc result
* Return value  : none
*****/
static void lcd_display_adc (const uint16_t adc_result)
{
    /* Declare a temporary variable */
    char_t a;

    /* Declare temporary character string */
    char_t lcd_buffer[11] = " ADC: XXXH";

    /* Convert ADC result into a character string, and store in the local.
       Casting to ensure use of correct data type. */
    a = (char_t)((adc_result & 0x0F00) >> 8);
    lcd_buffer[6] = (a < 0x0A) ? (a + 0x30) : (a + 0x37);
    a = (char_t)((adc_result & 0x00F0) >> 4);
    lcd_buffer[7] = (a < 0x0A) ? (a + 0x30) : (a + 0x37);
    a = (char_t)(adc_result & 0x000F);
    lcd_buffer[8] = (a < 0x0A) ? (a + 0x30) : (a + 0x37);

    /* Display the contents of the local string lcd_buffer */
    R_LCD_Display(3, (uint8_t *)lcd_buffer);
}

/*****
* End of function lcd_display_adc
*****/

```

In the e² studio Project Tree, expand the 'src\smc_gen\general' folder and open the file 'r_cg_userdefine.h' by double-clicking on it. Insert the following type define in between the user code delimiter comments as shown below.

```

/* Start user code for type define. Do not edit comment generated here */

typedef char char_t;

/* End user code. Do not edit comment generated here */

```

In the e² studio Project Tree, expand the 'src\smc_gen\Config_S12AD0' folder and open the file 'Config_S12AD0.h' by double-clicking on it. Insert the following code in the user code area for function, resulting in the code shown below:

```

/* Start user code for function. Do not edit comment generated here */

/* Flag indicates when A/D conversion is complete */
extern volatile uint8_t g_adc_complete;

/* Functions for starting and stopping software triggered A/D conversion */
void R_S12AD0_SWTriggerStart(void);
void R_S12AD0_SWTriggerStop(void);

/* End user code. Do not edit comment generated here */

```

Open the file 'Config_S12AD0.c' by double-clicking on it. Insert the following code in the user code area for adding at the end of the file, as shown below:

```
/* Start user code for adding. Do not edit comment generated here */

/*****
* Function Name: R_S12AD0_SWTriggerStart
* Description   : This function starts the AD0 converter.
* Arguments    : None
* Return Value  : None
*****/
void R_S12AD0_SWTriggerStart(void)
{
    IR(PERIB, INTB183) = 0U;
    IEN(PERIB, INTB183) = 1U;
    S12AD.ADCSR.BIT.ADST = 1U;
}

/*****
End of function R_S12AD0_SWTriggerStart
*****/

/*****
* Function Name: R_S12AD0_SWTriggerStop
* Description   : This function stops the AD0 converter.
* Arguments    : None
* Return Value  : None
*****/
void R_S12AD0_SWTriggerStop(void)
{
    S12AD.ADCSR.BIT.ADST = 0U;
    IEN(PERIB, INTB183) = 0U;
    IR(PERIB, INTB183) = 0U;
}

/*****
End of function R_S12AD0_SWTriggerStop
*****/

/* End user code. Do not edit comment generated here */
```

Open the file Config_S12AD0_user.c and insert the following code in the user code area for global, resulting in the code shown below:

```
/* Start user code for global. Do not edit comment generated here */

/* Flag indicates when A/D conversion is complete */
volatile uint8_t g_adc_complete;

/* End user code. Do not edit comment generated here */
```

Insert the following code in the user code area of the r_Config_S12AD0_interrupt function, resulting in the code shown below:

```
static void r_Config_S12AD0_interrupt(void)
{
    /* Start user code for r_Config_S12AD0_interrupt. Do not edit comment generated here */

    g_adc_complete = TRUE;

    /* End user code. Do not edit comment generated here */
}
```

Select 'Build Project' from the 'Project' menu or use the  button. e² studio will build the project with no errors.

The project may now be run using the debugger as described in §6. When any switch is pressed, the program will perform an A/D conversion of the voltage level on the RV1 potentiometer line and display the result on the LCD panel. Return to this point in the Tutorial to add the UART user code.

5.5 Debug Code Integration

API functions for trace debugging via the RSK+ serial port are provided with the RSK+. Refer to the Tutorial project folder created according to the Quick Start Guide procedure. Check that the following files are in the src folder:

- r_rsk_debug.c
- r_rsk_debug.h

Copy these files in to the src folder below the workspace.

In the r_rsk_debug.h file, ensure the following macro definition is included:

```
/* Macro for definition of serial debug transmit function - user edits this */
#define SERIAL_DEBUG_WRITE (R_SCI10_AsyncTransmit)
```

This macro is referenced in the r_rsk_debug.c file and allows easy re-direction of debug output if a different debug interface is used.

5.6 UART Code Integration

5.6.1 SCI Code

In the e² studio Project Tree, expand the 'src\smc_gen\Config_SCI10' folder and open the file 'Config_SCI10.h' by double-clicking on it. Insert the following code in the user code area at the end of the file:

```
/* Start user code for function. Do not edit comment generated here */

/* Exported functions used to transmit a number of bytes and wait for completion */
MD_STATUS R_SCI10_AsyncTransmit(uint8_t * const tx_buf, const uint16_t tx_num);

/* Character is used to receive key presses from PC terminal */
extern uint8_t g_rx_char;

/* End user code. Do not edit comment generated here */
```

Open the file 'Config_SCI10_user.c'. Insert the following code in the user area for global near the beginning of the file:

```
/* Start user code for global. Do not edit comment generated here */

/* Global used to receive a character from the PC terminal */
uint8_t g_rx_char;

/* Flag used locally to detect transmission complete */
static volatile uint8_t s_sci10_txdone;

/* End user code. Do not edit comment generated here */
```

In the same file, insert the following code in the user code area inside the r_Config_SCI10_callback_transmitend function:

```
static void r_Config_SCI10_callback_transmitend (void)
{
    /* Start user code for r_Config_SCI10_callback_transmitend. Do not edit comment generated here */

    s_sci10_txdone = TRUE;

    /* End user code. Do not edit comment generated here */
}
```

In the same file, insert the following code in the user code area inside the `r_Config_SCI10_callback_receiveend` function:

```
static void r_Config_SCI10_callback_receiveend(void)
{
    /* Start user code for r_Config_SCI10_callback_receiveend. Do not edit comment generated here */

    /* Check the contents of g_rx_char */
    if (('c' == g_rx_char) || ('C' == g_rx_char))
    {
        g_adc_trigger = TRUE;
    }

    /* Set up SCI10 receive buffer and callback function again */
    R_Config_SCI10_Serial_Receive((uint8_t *)&g_rx_char, 1);

    /* End user code. Do not edit comment generated here */
}
```

At the end of the file, in the user code area for adding, add the following function definition:

```

/*****
* Function Name: R_SCI10_AsyncTransmit
* Description  : This function sends SCI10 data and waits for the transmit end flag.
* Arguments    : tx_buf -
*                transfer buffer pointer
*                tx_num -
*                buffer size
* Return Value : status -
*                MD_OK or MD_ARGERROR
*****/
MD_STATUS R_SCI10_AsyncTransmit(uint8_t * const tx_buf, const uint16_t tx_num)
{
    MD_STATUS status = MD_OK;

    /* Clear the flag before initiating a new transmission */
    s_sci10_txdone = FALSE;

    /* Send the data using the API */
    status = R_Config_SCI10_Serial_Send(tx_buf, tx_num);

    /* Wait for the transmit end flag */
    while (FALSE == s_sci10_txdone)
    {
        /* Wait */
    }
    return (status);
}

/*****
* End of function R_SCI10_AsyncTransmit
*****/

```

5.6.2 Main UART code

Open the file 'SC_Tutorial.c'. Add the following declaration to near the top of the file:

```
#include "r_smc_entry.h"
#include "r_okaya_lcd.h"
#include "r_cg_userdefine.h"
#include "Config_S12AD0.h"
#include "r_rsk_switch.h"
#include "r_rsk_debug.h"
#include "Config_SCI10.h"

/* Variable for flagging user requested ADC conversion */
volatile uint8_t g_adc_trigger = FALSE;

/* Prototype declaration for cb_switch_press */
static void cb_switch_press (void);

/* Prototype declaration for get_adc */
static uint16_t get_adc(void);
```

```

/* Prototype declaration for lcd_display_adc */
static void lcd_display_adc (const uint16_t adc_result);

/* Prototype declaration for uart_display_adc */
static void uart_display_adc(const uint8_t adc_count, const uint16_t adc_result);

/* Variable to store the A/D conversion count for user display */
static uint8_t s_adc_count = 0;

```

Add the following highlighted code in the main function:

```

void main(void)
{
    /* Initialize the switch module */
    R_SWITCH_Init();

    /* Set the call back function when SW1 or SW2 is pressed */
    R_SWITCH_SetPressCallback(cb_switch_press);

    /* Initialize the debug LCD */
    R_LCD_Init();

    /* Displays the application name on the debug LCD */
    R_LCD_Display(0, (uint8_t *) " RSK+RX671 ");
    R_LCD_Display(1, (uint8_t *) " Tutorial ");
    R_LCD_Display(2, (uint8_t *) " Press Any Switch ");

    /* Start the A/D converter */
    R_Config_S12AD0_Start();

    /* Set up SCI10 receive buffer and callback function */
    R_Config_SCI10_Serial_Receive((uint8_t *)&g_rx_char, 1);

    /* Enable SCI10 operations */
    R_Config_SCI10_Start();

    while (1U)
    {
        uint16_t adc_result;

        /* Wait for user requested A/D conversion flag to be set (SW1 or SW2) */
        if (TRUE == g_adc_trigger)
        {
            /* Call the function to perform an A/D conversion */
            adc_result = get_adc();

            /* Display the result on the LCD */
            lcd_display_adc(adc_result);

            /* Increment the s_adc_count */
            if (16 == (++s_adc_count))
            {
                s_adc_count = 0;
            }

            /* Send the result to the UART */
            uart_display_adc(s_adc_count, adc_result);

            /* Reset the flag */
            g_adc_trigger = FALSE;
        }
        /* SW3 is directly wired into the ADTRG0n pin so will
        cause the interrupt to fire */
        else if (TRUE == g_adc_complete)
        {
            /* Get the result of the A/D conversion */
            R_Config_S12AD0_Get_ValueResult(ADCHANNEL0, &adc_result);

            /* Display the result on the LCD */
            lcd_display_adc(adc_result);

            /* Increment the s_adc_count */
            if (16 == (++s_adc_count))
            {
                s_adc_count = 0;
            }

            /* Send the result to the UART */
            uart_display_adc(s_adc_count, adc_result);
        }
    }
}

```

```

        /* Reset the flag */
        g_adc_complete = FALSE;
    }
    else
    {
        /* do nothing */
    }
}
}

```

Then, add the following function definition in the end of the file:

```

/*****
* Function Name : uart_display_adc
* Description   : Converts adc result to a string and sends it to the UART.
* Argument      : uint8_t : adc_count
                  uint16_t: adc_result
* Return value  : none
*****/
static void uart_display_adc (const uint8_t adc_count, const uint16_t adc_result)
{
    /* Declare a temporary variable */
    char_t a;

    /* Declare temporary character string */
    char_t uart_buffer[] = "ADC xH Value: xxxH\r\n";

    /* Convert ADC result into a character string, and store in the local.
       Casting to ensure use of correct data type. */
    a = (char_t)(adc_count & 0x000F);
    uart_buffer[4] = (a < 0x0A) ? (a + 0x30) : (a + 0x37);
    a = (char_t)((adc_result & 0x0F00) >> 8);
    uart_buffer[14] = (a < 0x0A) ? (a + 0x30) : (a + 0x37);
    a = (char_t)((adc_result & 0x00F0) >> 4);
    uart_buffer[15] = (a < 0x0A) ? (a + 0x30) : (a + 0x37);
    a = (char_t)(adc_result & 0x000F);
    uart_buffer[16] = (a < 0x0A) ? (a + 0x30) : (a + 0x37);

    /* Send the string to the UART */
    r_debug_print(uart_buffer);
}

/*****
* End of function uart_display_adc
*****/

```

Select 'Build Project' from the 'Project' menu. e² studio will build the project with no errors.

The project may now be run using the debugger as described in §6. Connect the RSK+ G1CUSB0 port to a USB port on a PC. If this is the first time the RSK+ has been connected to the PC then a device driver will be installed automatically. Open Device Manager, the virtual COM port will be appeared under 'Port (COM & LPT)' as 'RSK+ USB Serial Port (COMx)', where x is a number.

Open a terminal program, such as HyperTerminal, on the PC with the same settings as for SCI10 (Baudrate: 19200, Data Length: 8, Parity Bit: None, Stop Bit: 1, Flow Control: None).

When any switch is pressed, or when 'c' is sent via the COM port, the program will perform an A/D conversion of the voltage level on the RV1 potentiometer line and display the result on the LCD panel and send the result to the PC terminal program via the SCI10.

5.7 LED Code Integration

Open the file 'SC_Tutorial.c'. Add the following declaration to the near the top of the file:

```
#include "r_smc_entry.h"
#include "r_okaya_lcd.h"
#include "r_cg_userdefine.h"
#include "Config_S12AD0.h"
#include "r_rsk_switch.h"
#include "r_rsk_debug.h"
#include "Config_SCI10.h"
#include "rskrx671def.h"

/* Variable for flagging user requested ADC conversion */
volatile uint8_t g_adc_trigger = FALSE;

/* Prototype declaration for cb_switch_press */
static void cb_switch_press (void);

/* Prototype declaration for get_adc */
static uint16_t get_adc(void);

/* Prototype declaration for lcd_display_adc */
static void lcd_display_adc (const uint16_t adc_result);

/* Prototype declaration for uart_display_adc */
static void uart_display_adc(const uint8_t adc_count, const uint16_t adc_result);

/* Variable to store the A/D conversion count for user display */
static uint8_t s_adc_count = 0;

/* Prototype declaration for led_display_count */
static void led_display_count(const uint8_t count);
```

Add the following highlighted code in the main function:

```
void main(void)
{
    /* Initialize the switch module */
    R_SWITCH_Init();

    /* Set the call back function when SW1 or SW2 is pressed */
    R_SWITCH_SetPressCallback(cb_switch_press);

    /* Initialize the debug LCD */
    R_LCD_Init();

    /* Displays the application name on the debug LCD */
    R_LCD_Display(0, (uint8_t *) "RSK+RX671 ");
    R_LCD_Display(1, (uint8_t *) "Tutorial ");
    R_LCD_Display(2, (uint8_t *) "Press Any Switch ");

    /* Start the A/D converter */
    R_Config_S12AD0_Start();

    /* Set up SCI10 receive buffer and callback function */
    R_Config_SCI10_Serial_Receive((uint8_t *)&g_rx_char, 1);

    /* Enable SCI10 operations */
    R_Config_SCI10_Start();

    while (1U)
    {
        uint16_t adc_result;

        /* Wait for user requested A/D conversion flag to be set (SW1 or SW2) */
        if (TRUE == g_adc_trigger)
        {
            /* Call the function to perform an A/D conversion */
            adc_result = get_adc();

            /* Display the result on the LCD */
            lcd_display_adc(adc_result);
        }
    }
}
```

```

/* Increment the s_adc_count and display using the LEDs */
if (16 == (++s_adc_count))
{
    s_adc_count = 0;
}
led_display_count(s_adc_count);

/* Send the result to the UART */
uart_display_adc(s_adc_count, adc_result);
/* Reset the flag */
g_adc_trigger = FALSE;
}
/* SW3 is directly wired into the ADTRG0n pin so will
cause the interrupt to fire */
else if (TRUE == g_adc_complete)
{
    /* Get the result of the A/D conversion */
    R_Config_S12AD0_Get_ValueResult(ADCHANNEL0, &adc_result);

    /* Display the result on the LCD */
    lcd_display_adc(adc_result);

    /* Increment the s_adc_count and display using the LEDs */
    if (16 == (++s_adc_count))
    {
        s_adc_count = 0;
    }
    led_display_count(s_adc_count);

    /* Send the result to the UART */
    uart_display_adc(s_adc_count, adc_result);
    /* Reset the flag */
    g_adc_complete = FALSE;
}
else
{
    /* do nothing */
}
}
}

```

Then, add the following function definition at the end of the file:

```

/*****
* Function Name : led_display_count
* Description   : Converts count to binary and displays on 4 LEDs0-3
* Argument      : uint8_t count
* Return value  : none
*****/
static void led_display_count (const uint8_t count)
{
    /* Set LEDs according to lower nibble of count parameter */
    LED0 = (uint8_t)((count & 0x01) ? LED_ON : LED_OFF);
    LED1 = (uint8_t)((count & 0x02) ? LED_ON : LED_OFF);
    LED2 = (uint8_t)((count & 0x04) ? LED_ON : LED_OFF);
    LED3 = (uint8_t)((count & 0x08) ? LED_ON : LED_OFF);
}
/*****
* End of function led_display_count
*****/

```

Select 'Build Project' from the 'Project' menu or use the  button. e2 studio will build the project with no errors.

The project may now be run using the debugger as described in §6. The code will perform the same but now the LEDs will display the s_adc_count in binary form.

6. Debugging the Project

In the Project Explorer pane, ensure that the 'SC_Tutorial' project is selected. To enter the configurations, click upon the arrow next to the debug button  and select 'Debug Configuration'.

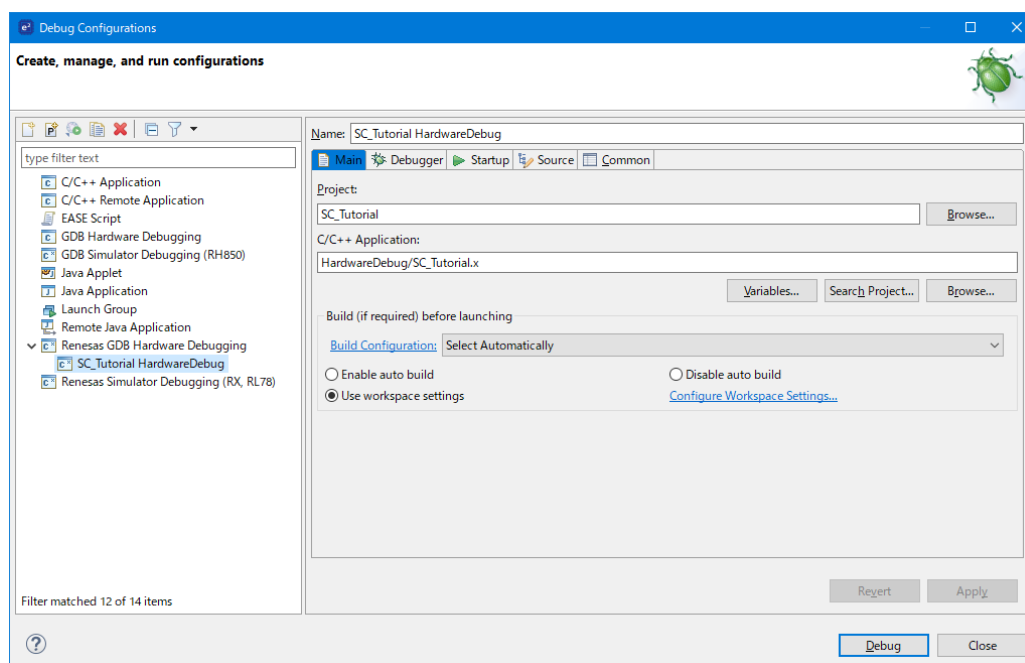


Figure 6-1 Debug Configurations

In order to execute the project, it is necessary to change the following settings in 'Renesas GDB Hardware Debugging' -> 'SC_Tutorial HardwareDebug' -> 'Debugger' -> 'Connection Settings'.

Set 'Power Target From The Emulator (MAX 200mA)' to 'No', set 'Extal Frequency [MHz]' and 'Operating Frequency [MHz]' to the correct frequency. (They should not use the 'Enter' key after typing in values.)

These can be found from the device schematics (in the case of RSK+RX671 set the EXTAL Frequency: 24.0000, Operating Frequency: 120.000).

For more information on powering the RSK+RX671 please refer to the User's Manual.

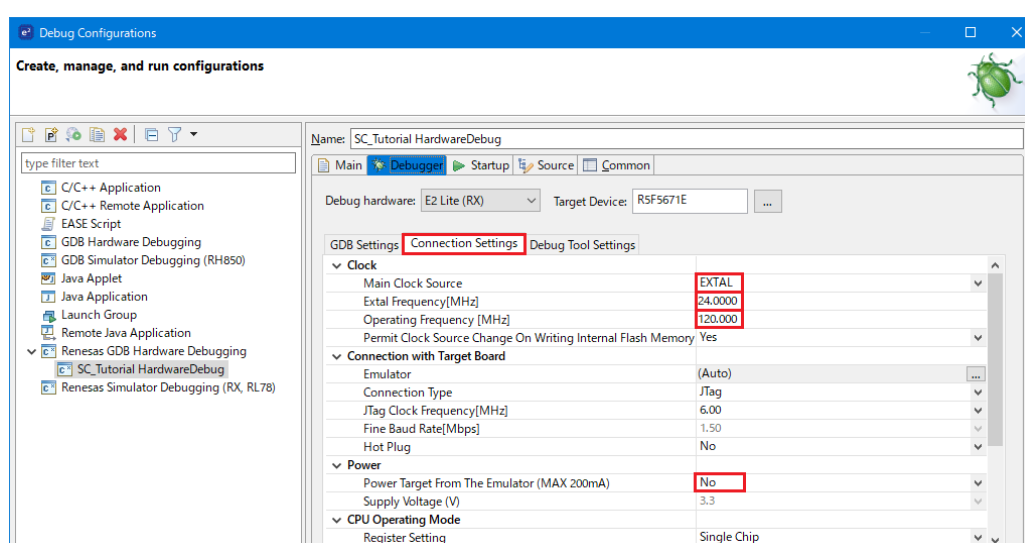


Figure 6-2 Connection Settings

When the setting is complete, press the 'Apply' button followed by the "Close" button to close the debug configuration window.

Connect the E2 Lite to the PC and the RSK+ E1/E2 Lite connector. Connect the Pmod LCD to the PMOD1 connector. Connect the center positive +5V PSU to the PWR connector on the RSK+ and apply power. In the Project Explorer pane, ensure that the 'SC_Tutorial' project is selected. To debug the project, click the  button. The dialog shown in **Figure 6-3** will be displayed.

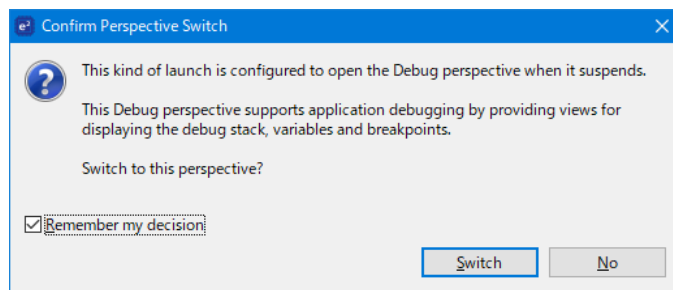


Figure 6-3 Perspective Switch Dialog

Click 'Remember my decision' to skip this dialog later. Click 'Switch' to confirm that the debug window perspective will be used. The debugger will start up and the code will stop at the Smart Configurator function 'PowerOn_Reset_PC' as shown in **Figure 6-4**.

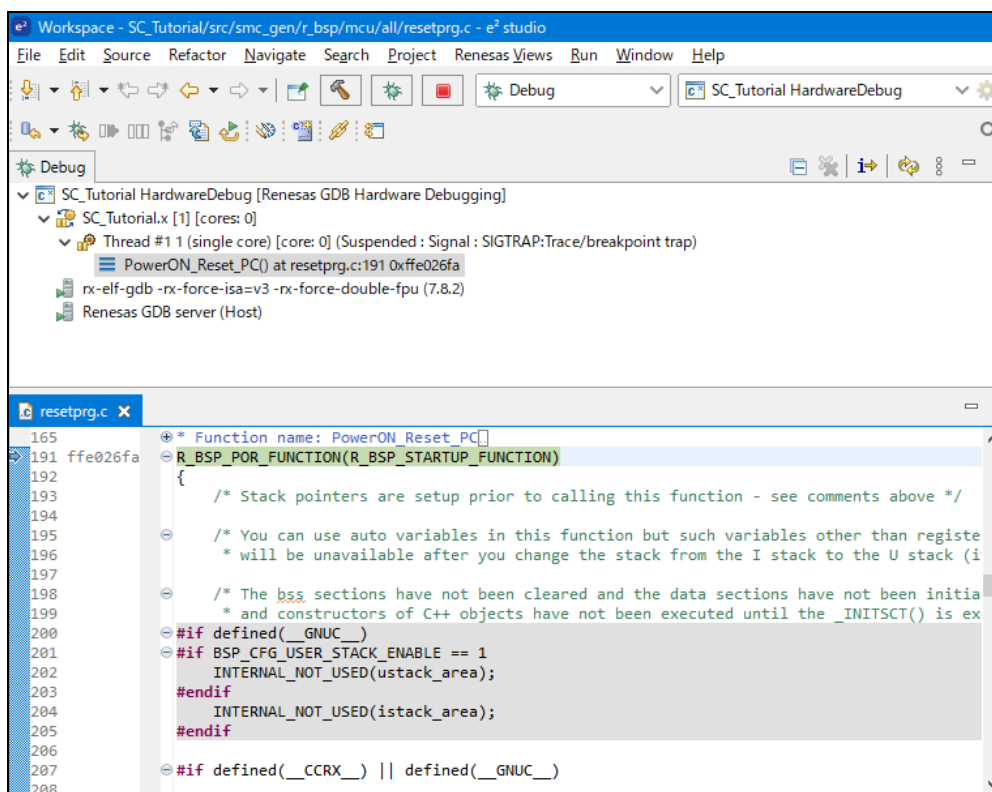



Figure 6-4 Debugger start up screen

For more information on the e² studio debugger refer to the Tutorial manual. To run the code click the  button. The debugger will stop again at the beginning of the main function. Press  again to run the code.

7. Additional Information

Technical Support

For details on how to use e² studio, refer to the help file by opening e² studio, then selecting Help > Help Contents from the menu bar.

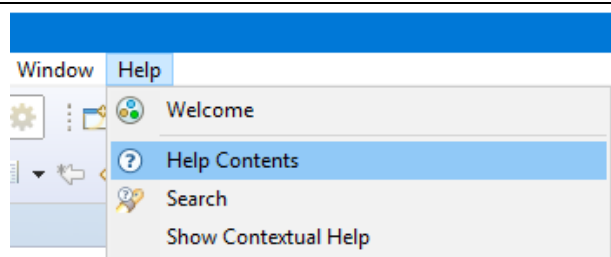

For information about the RX671 group microcontroller refer to 'RX671 Group User's Manual: Hardware'.

For information about the RX assembly language, refer to 'RX Family User's Manual: Software'.

Technical Contact Details

Please refer to the contact details listed in section 8 of the "Quick Start Guide".

General information on Renesas microcontrollers can be found on the Renesas website at:
<https://www.renesas.com/>

Trademarks

All brand or product names used in this manual are trademarks or registered trademarks of their respective companies or organisations.

Copyright

This document may be, wholly or partially, subject to change without notice. All rights reserved. Duplication of this document, either in whole or part is prohibited without the written permission of Renesas Electronics Europe GmbH.

© 2021 Renesas Electronics Europe GmbH. All rights reserved.

© 2021 Renesas Electronics Corporation. All rights reserved.

REVISION HISTORY	RX671 Group Renesas Starter Kit+ for RX671 Smart Configurator Tutorial Manual For e ² studio
------------------	---

Rev.	Date	Description	
		Page	Summary
1.00	May.10.21	—	First Edition issued

RX671 Group
Renesas Starter Kit+ for RX671
Smart Configurator Tutorial Manual For e² studio

Publication Date: Rev. 1.00 May.10.21

Published by: Renesas Electronics Corporation

RX671 Group